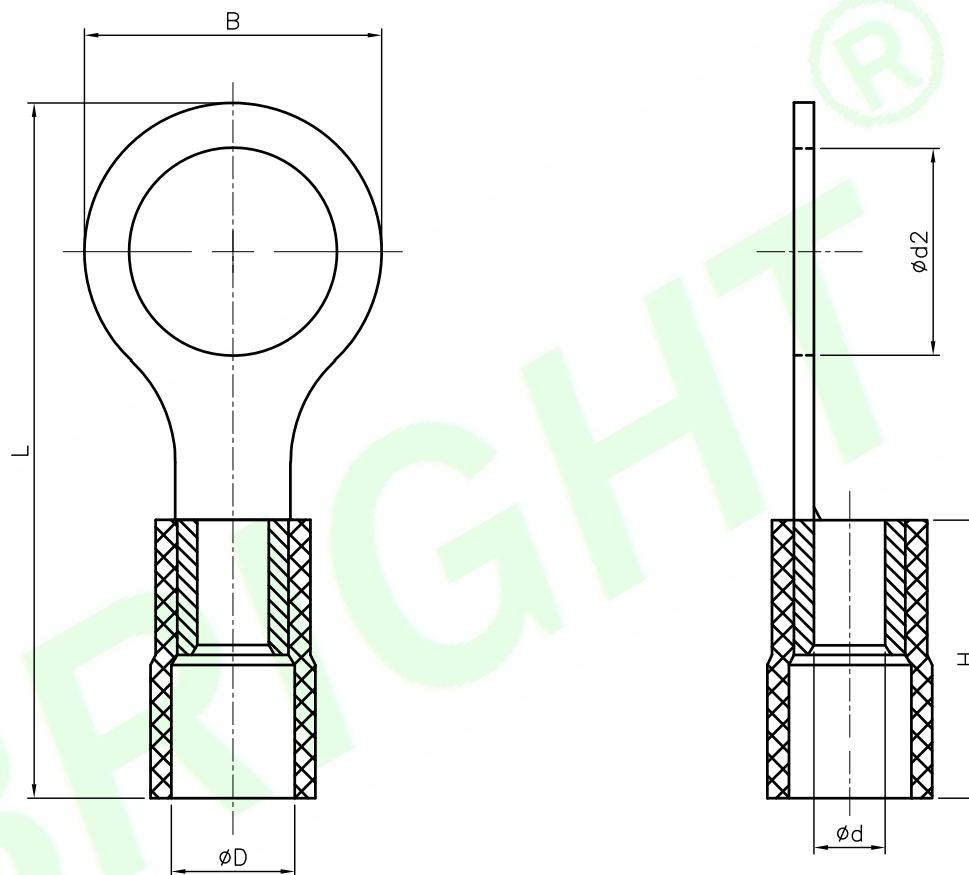


Specifications:

Terminal Material:Copper

Surface Treatment:Tinning

insulating Materials:PVC

Thickness:1.15(± 0.1)mmPlating Thickness:2.5~5 μ Max Current: $i_{max}=62A$ Cable Size:6~10mm²(A.W.G.8)

ITEM NO	USA screw	d2(± 0.3)	B(± 0.5)	L(± 1)	H(± 0.5)	ϕD (± 0.3)	ϕd (± 0.2)
RV8-6	1/4	6.4	11	31.5	17.5	8.3	4.5

5X			
4X			
3X			
2X			
1X	ORIGINAL	Tsw	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Tsw	GENERAL TOLERANCE:	
CHKD.: Ren	LINEAR	ANGLES
APPD.: Billy	X.: ± 0.30	X': $\pm 5.0^\circ$
	X.X: ± 0.20	X.X': $\pm 3.0^\circ$
	X.XX: ± 0.15	X.XX': $\pm 2.0^\circ$
	X.XXX: ± 0.10	X.XXX': $\pm 1.0^\circ$

PART NO : RV8-6
DWG. NO.:
TITLE : PRE INSULATED RING TERMINALS
DATE: 8-Aug-2020

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4