

A	Specifications:
	Insulator:PA6T UL94V-0 Colour:Black & Glass-reinforced thermoplastic UL94V-0 Colour:Black
	Hook:LCP UL94V-0 Colour:Black
	Contact:Brass

Hook:LCP UL94V-0 Colour:Black
Contact:Brass

B	Rating:
	Current Rating:1.0 Amp
	Voltage Rating:250V AC/DC
	Operating Temperature Range:-40°~+105°C

Current Rating:1.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40~+105°C

	Electrical:
	Contact resistance:20m Ohm Max
	Insulator resistance:1000M ohm min.
	Withstanding Voltage:500V AC/Minute

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute




Ordering Information
B2008R-XXX-01-NX
1 324 56

B2008R-XXX-01-NX
1 324 56

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— A:Gold Flash
5:— N:PA6T
Blank:Glass-reinf
6:— A:In bag
B:In Tube
C:In Tray

Blank: Glass-reinforced thermoplastic

6: — A:In bag
B:In Tube
C:In Tray

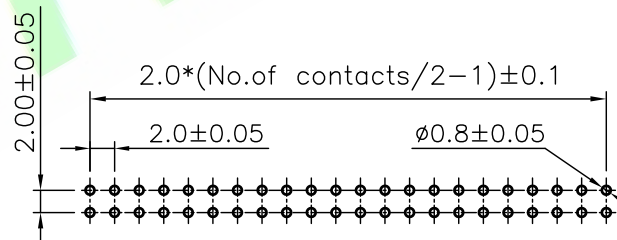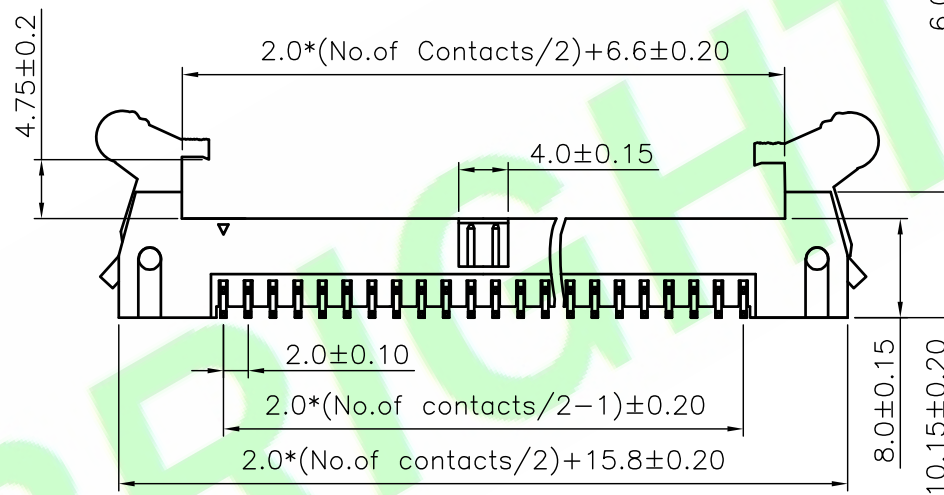


Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : B2008R-XXX-01-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Tsw	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.00mm Pitch Box Header R/A Type				
2X				Ren	x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Tsw		APPD.:	x.xx: ±0.15	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 3-AUG-2020		SHEET: 1/1		A4
								SCALE: 1:1			
								UNIT: mm	THIRD ANGLE PROJECTION		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET:	1/1
SCALE:	1:1
UNIT:	mm



THIRD ANGLE PROJECTION

A4