





Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:—Series No.
2:—R:R/A Type
3:—No. of Positions
4:—A:Gold Flash
J:1u" Gold
H:Selective Gold Plated
Q:Tin Plated
6:—A:In bag
B:In Tube
C:In Tray

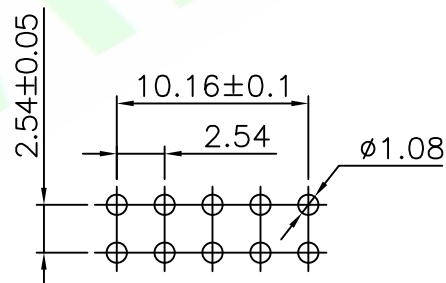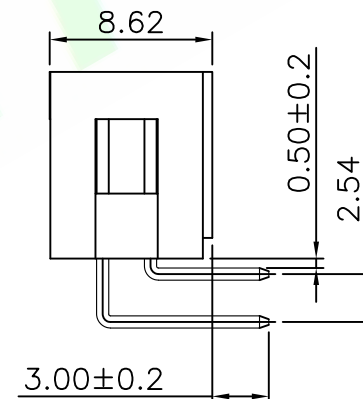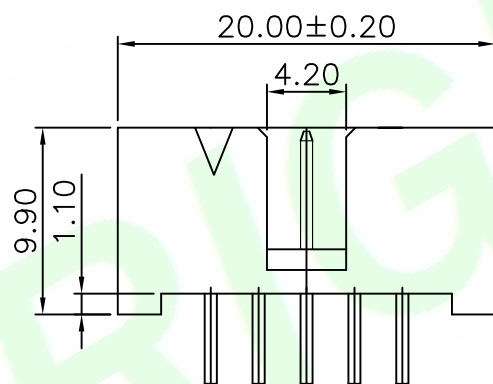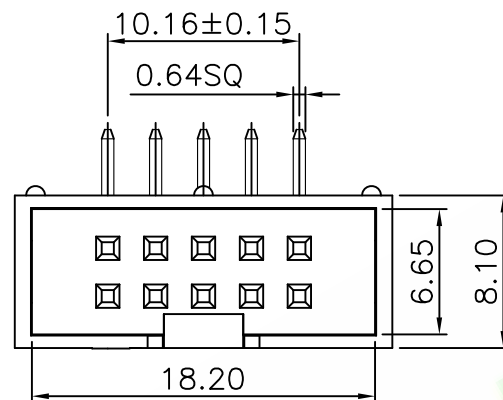

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : B2546R-10X-01-NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 2.54mm Pitch Box Header R/A Type		SHEET: 1/1		 THIRD ANGLE PROJECTION	A4
2X					x.x: ±0.20	x.x°: ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 25-Jun-2015		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx°: ±1.0°						