
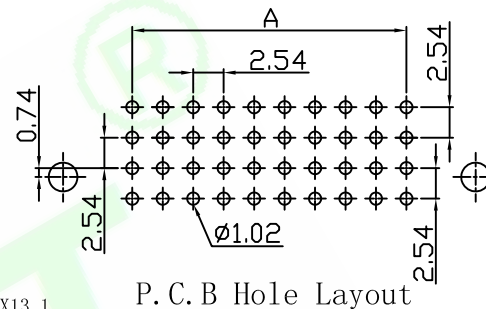


Material and Finish:



1. Insulator Material: P.B.T+30%
Glass Filled, UL94V-0
2. Contact Material: Brass
3. Contact Plated: Gold Plated Over Nickel.
4. Current Rating: 3 Amps
5. Insulation Withstanding Voltage: 1000V AC/minute
7. Operating Temperature: -40° C to +105° C
8. Color : BLACK

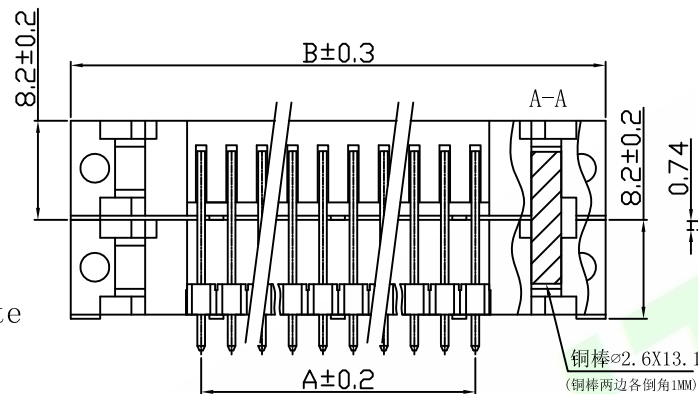

Ordering Information

B2549R-XXXX-99-X

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
C:Gold 5u"
D:Gold 10u"
H:Selective Gold Plated
Q:Tin Plated
5: — A:In bag
B:In Tube
C:In Tray

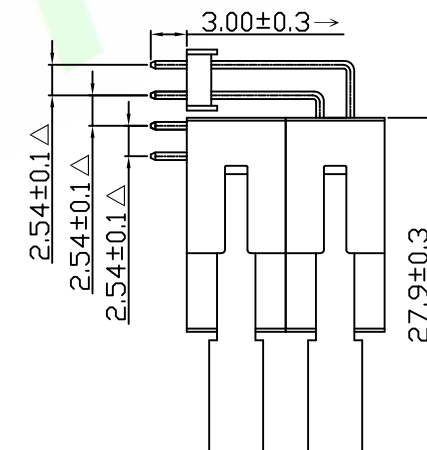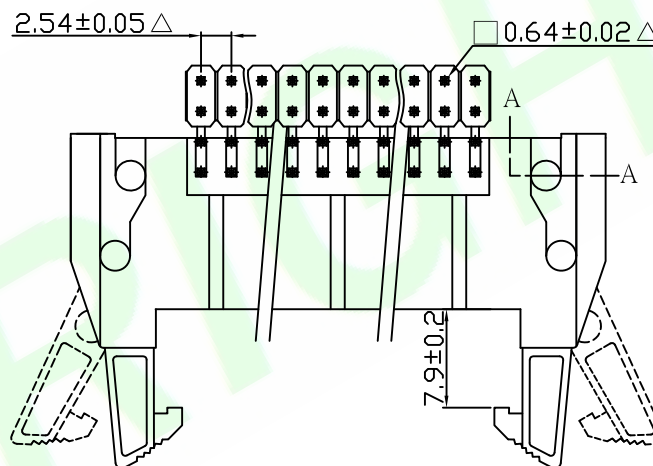

Circuits	A	B
2x25P	60.96	82.80
2x32P	78.74	100.58

5X			
4X			
3X			
2X	△此符号表示重點管控尺寸	曾冬明	2012-10-15
1X	ORIGINAL	joan cheng	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	
CHKD.:	朱波
APPD.:	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.:	X'.
X.X:	X.X'.
X.XX:	X.XX'.
X.XXX:	X.XXX'.

PART NO.:	B2549R-XXXX-99-X
DWG. NO.:	RD0312-011
TITLE:	2.54mm 90° 牛角 □=0.64 带双钩 双胶+排针塑胶 (環保材料)
DATE:	18-Dec-2008
HJBRIGHT®	東莞市華晶電子有限公司
BRIGEE-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	
SCALE: 1:1	
UNIT: mm	
THIRD ANGLE PROJECTION	A4