

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute



Ordering Information**B25410S-08X-01-NX**

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
S: Matte Tin
5: — A: In Bag
B: In Tube

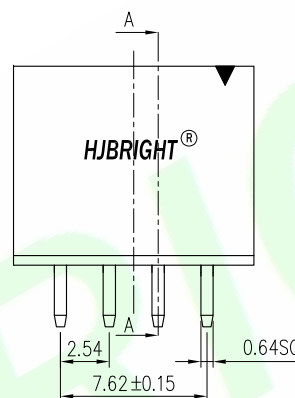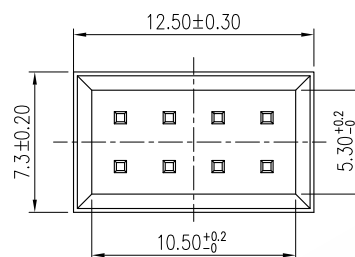

Recommended PCB Layout

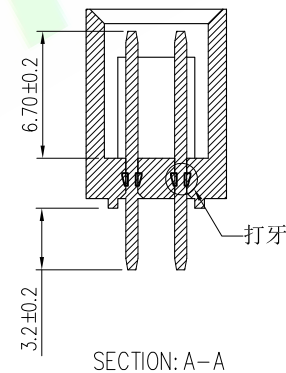

5X				DR.BY.: Bruce	GENERAL TOLERANCE:ISO 2768-mK		PART NO : B25410S-08X-01-NX		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 2.54mm Pitch 2*4P Box Header Straight Type		SHEET: 1/1			A4
2X					x.x: ±0.20	x.x°: ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Bruce		APPD.:	x.xx: ±0.15	x.xx°: ±2.0°			UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 2-May-2018		THIRD ANGLE PROJECTION			