



Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{6}$$

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:A Type
B:B Type
6:— A:In bag
B:In Tube
C:In Tray
F:W/Cap In Tape&Reel

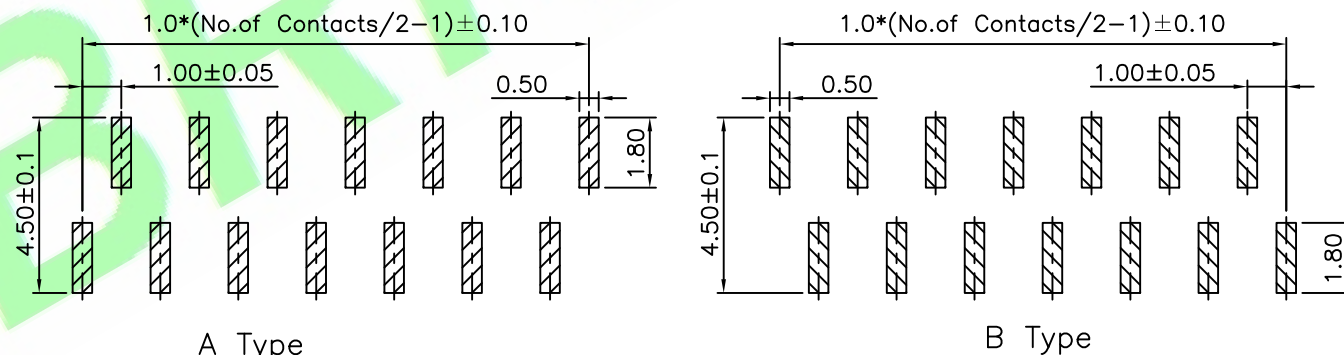

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S10011M-XXX21A-NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0"	TITLE : 1.0mm Pitch PCB Socket Header SMT Type				
2X					x.x: ±0.20	x.x': ±3.0"					
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0"	DATE: 4-Dec-2013		SHEET: 1/1	 THIRD ANGLE PROJECTION	 A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0"			SCALE: 1:1		
									UNIT: mm		