


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{56} \quad \overline{7}$$

- 1:—Series No.
2:—M:SMT Type
3:—No. of Positions
4:—A:Gold Flash
 ¹ H:Selective Gold Plated
 Q:Tin Plated
 N:Gold 3U”
 Y:30u” Gold on contact;Matte Tin on tail
5:—O:W/O Peg 1:W/Peg 5:With Bump
6:—A:In bag
 B:In Tube
 C:In Tray
 E:W/Cap In Tube
 F:W/Cap In Tape&Reel
7:—3:W/Peg out side

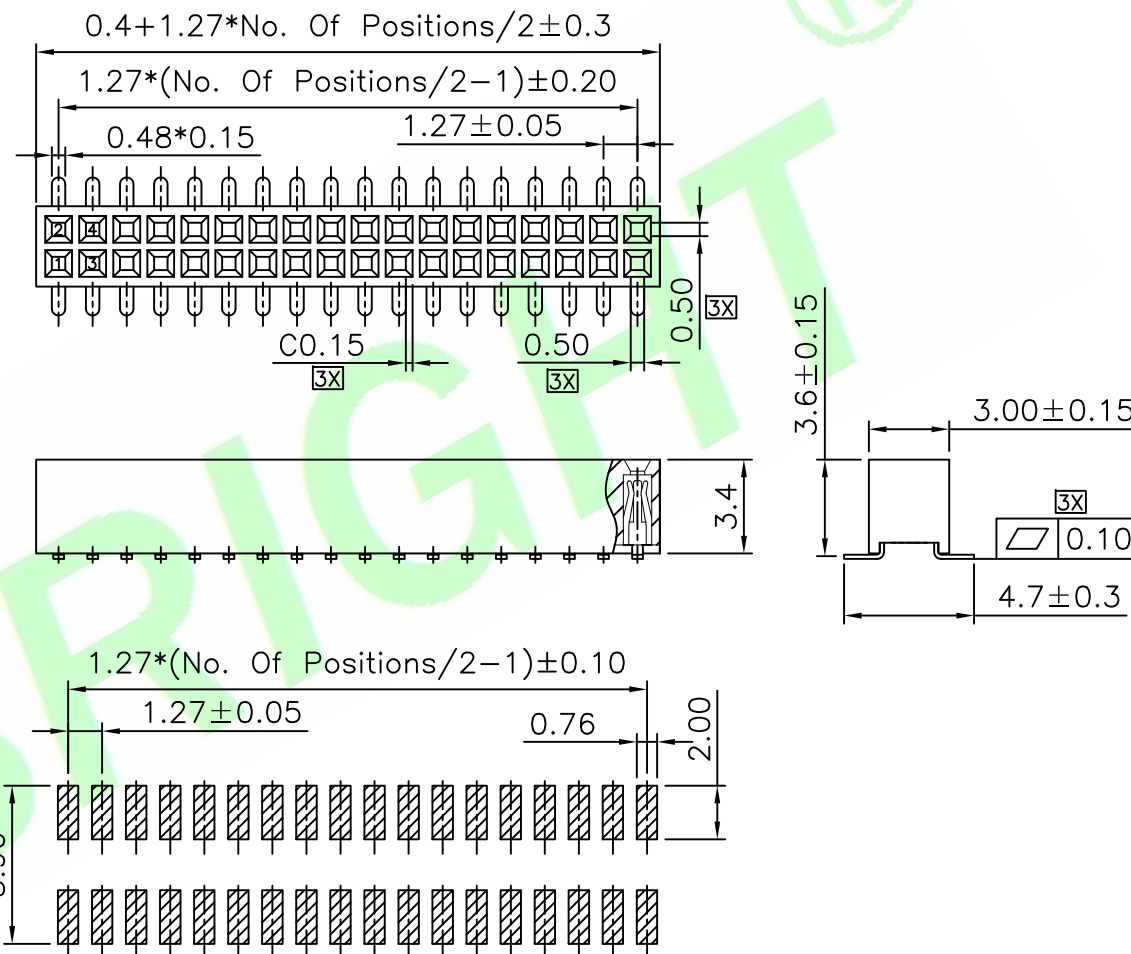

Recommended PCB Layout

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : S12712M-XXX34-XX-X		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Ren	x.: ±0.30	x': ±5.0"	TITLE : 1.27mm Pitch PCB Socket Header SMT Type				
2X					x.x: ±0.20	x.x': ±3.0"					
1X		joy chen		APPD.:	x.xx: ±0.15	x.xx': ±2.0"	DATE: 18-Sep-2020		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0"	UNIT: mm	SCALE: 1:1	THIRD ANGLE PROJECTION		