




Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5} \quad \overline{6}$$

- 1:—Series No.
2:—M:SMT Type
3:—No. of Positions
4:—A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:—5:With Bump
6:—E:Mylar In Tape&Reel
F:W/Cap In Tape&Reel

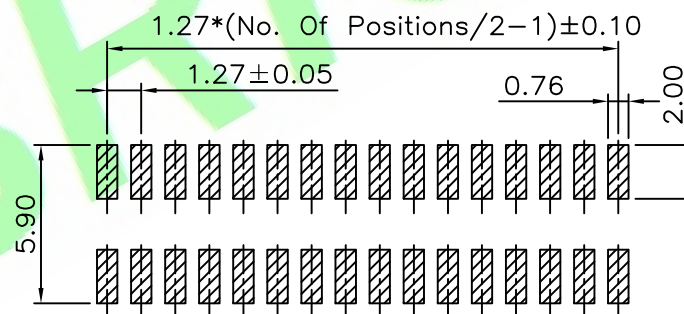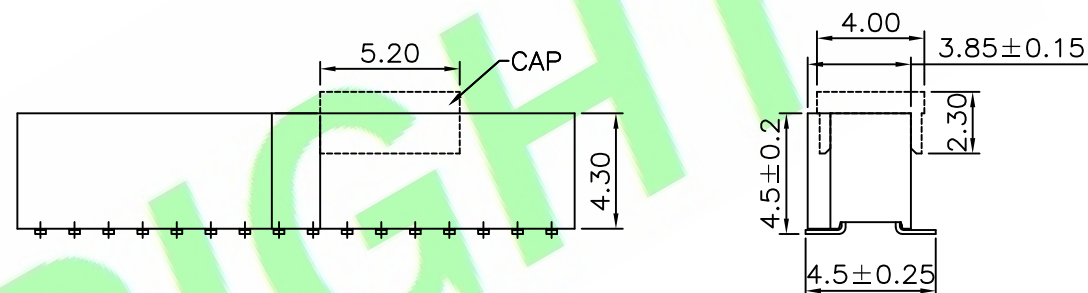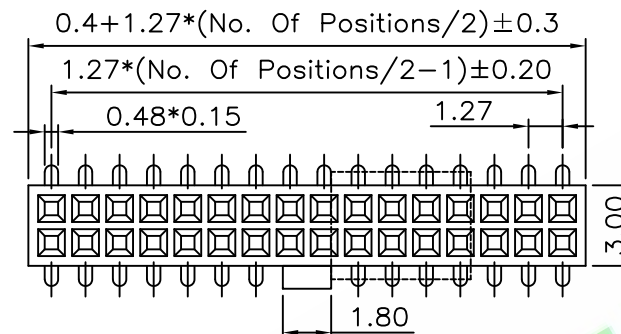

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : S12722M-XXX43A-5NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Kenry	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type		SHEET: 1/1			A4
2X				Tony	x.x: ±0.25	x.x': ±3.0°			SCALE:1:1			
1X	ORIGINAL	Kenry		APPD.:	x.xx: ±0.15	x.xx': ±2.0°			UNIT:mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx:	x.xxx': ±1.0°	DATE: 20-Apr-2015					

A4