





Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$


Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:—Series No.
2:—M:SMT Type
3:—No. of Positions
4:—A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:—A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

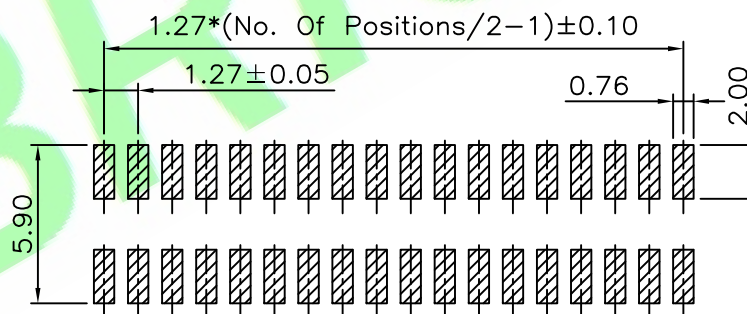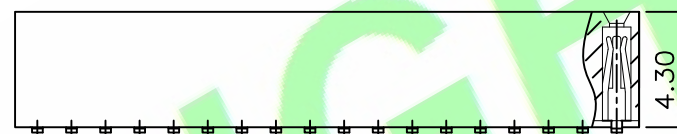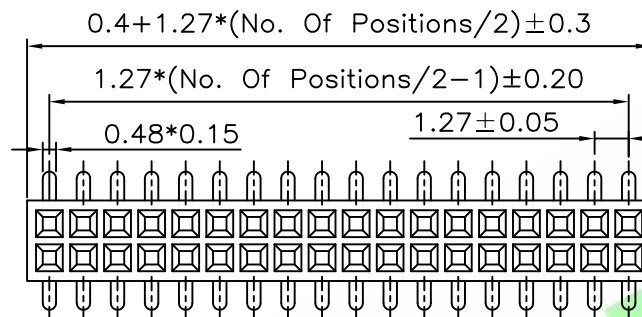

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : S12722M-XXX43-4X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE :			
2X				Tony	x.x: ±0.20	x.x': ±3.0°	1.27mm Pitch PCB Socket Header SMT Type			
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 27-Jun-2014	SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	UNIT:mmm	SCALE:1:1		