

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Copper alloy

Gold plating over Nickel

Rating:

Current Rating:1.5 Amp

Voltage Rating:125V AC

Operating Temperature Range:-40°~+70°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:1500V AC/Minute

Mechanical:

Retention Strength:

7.7Kg between Jack and Plug

Durability:750 Cycles Min.

Ordering Information**MJ036R2-8P8CX-1C**

1 2 3 4 5 6 7

1:— Series No.

2:— R:R/A Type

3:— No. of Positions

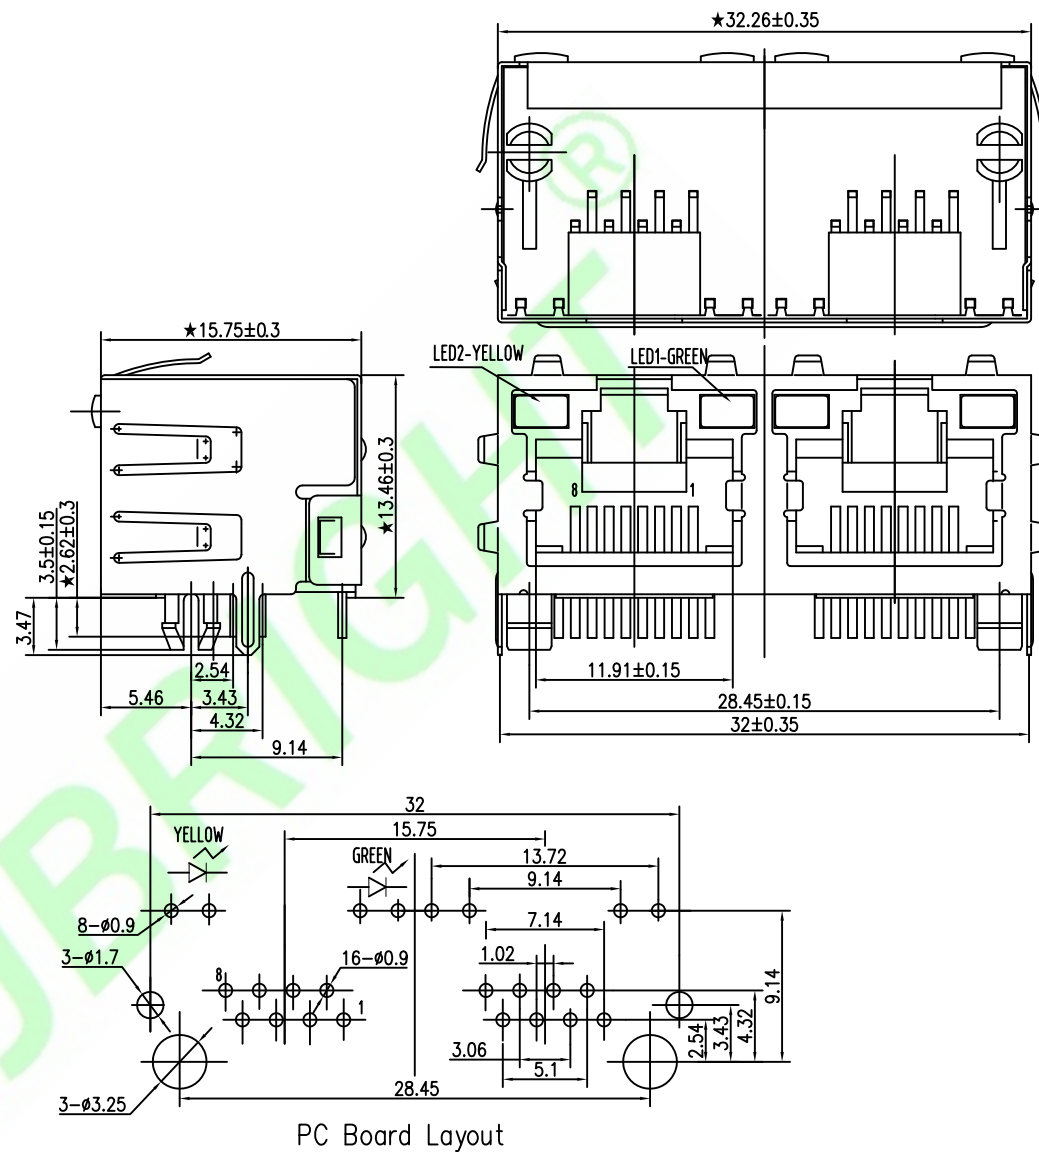
4:— No. of Contact

5:— A:Gold Flash

B:Gold Plated $3\mu''(0.075\mu m)$ C:Gold Plated $6\mu''(0.15\mu m)$ D:Gold Plated $10\mu''(0.25\mu m)$ E:Gold Plated $15\mu''(0.375\mu m)$ G:Gold Plated $30\mu''(0.75\mu m)$

6:— 1:With Flange

7:— C:In Tray

PC Board Layout

5X				DR.BY.: Sophia	GENERAL TOLERANCE:		PART NO : MJ036R2—8P8CX—1C	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT—E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X					CHKD.: Ren	LINEAR	ANGLES			
3X				APPD.: Billy		x.: ±0.40	x': ±5.0°			
2X					x.x: ±0.30	x.x': ±3.0°	DATE: 28—Sep—2020			
1X	ORIGINAL	Sophia			x.xx: ±0.20	x.xx': ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				