

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S12722R-XXX43-XX-X

1 2 3 4 5 6

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — A:Gold Flash

H:Selective Gold Plated

Q:Tin Plated

5: — Without this option:5.69mm




01:6.23

6: — A:In bag




B:In Tube

C:In Tray

D:In Tape&Reel

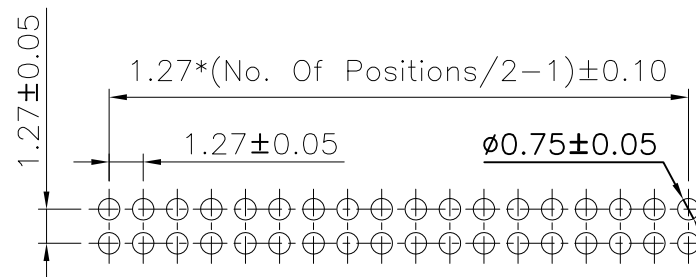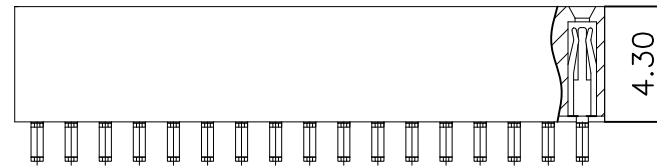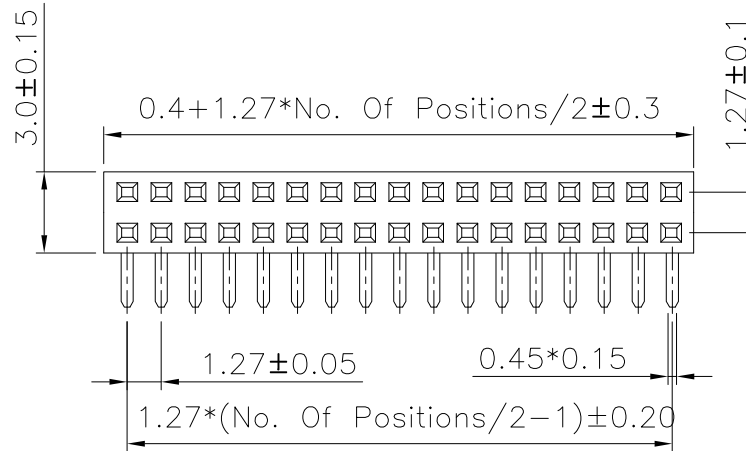


Recommended PCB Layout

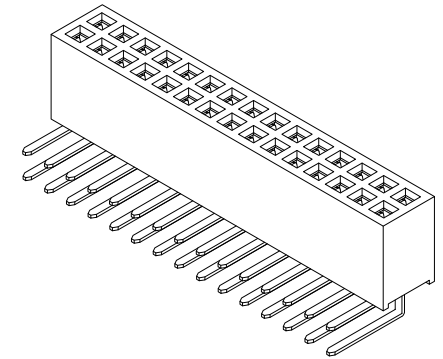

01

5X				DR.BY.: Samson	GENERAL TOLERANCE: LINEAR ANGLES X.: ±0.30 X': ±5.0° X.X: ±0.20 X.X': ±3.0° X.XX: ±0.15 X.XX': ±2.0° X.XXX: ±0.10 X.XXX': ±1.0°	PART NO : S12722R-XXX43-XX-X DWG. NO.: RD0806-111 TITLE : 1.27mm Pitch PCB Socket Header R/A Type
4X				CHKD.: Tony		
3X				APPD.: Billy	DATE: 28-Jun-2008	SHEET: 1/1 SCALE: 1:1 UNIT: mm
2X						
1X	ORIGINAL	Samson				
REV.	DESCRIPTION	DR.BY	ECN. NO.			

HJBRIGHT 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED



THIRD ANGLE PROJECTION

A4