

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information

S12722S-XXX43-X

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — A: In bag
B: In Tube
C: In Tray
F: W/Cap In Tape&Reel

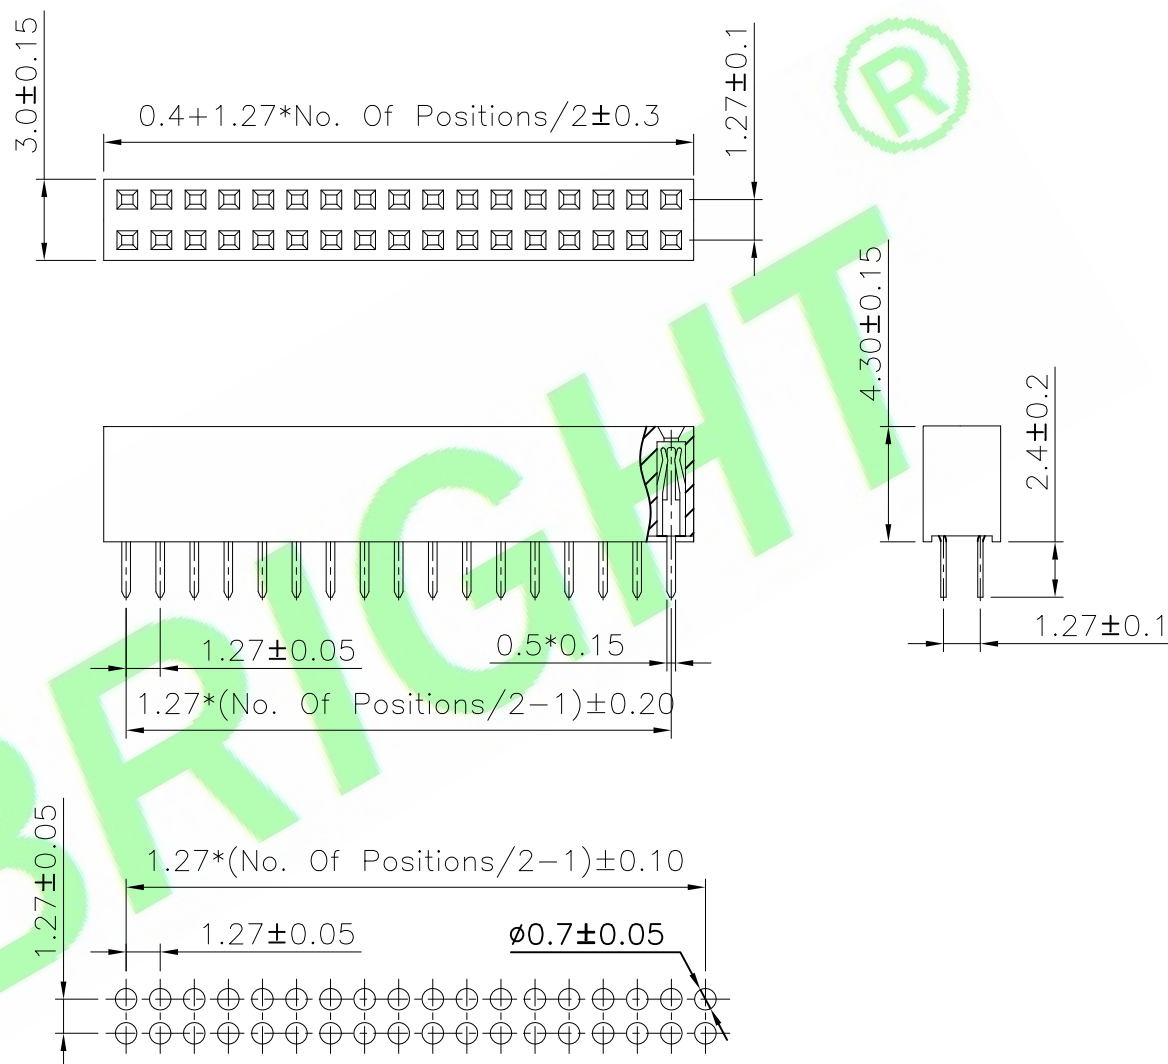

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12722S-XXX43-X	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.: RD0806-107			
3X				CHKD.: Tony	x.: ±0.30	x": ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header Straight Type	SHEET: 1/1		A4
2X				APPD.: Billy	x.x: ±0.20	x.x": ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson			x.xx: ±0.15	x.xx": ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx": ±1.0°	DATE: 28-Jun-2008	THIRD ANGLE PROJECTION		