


A(10:1)

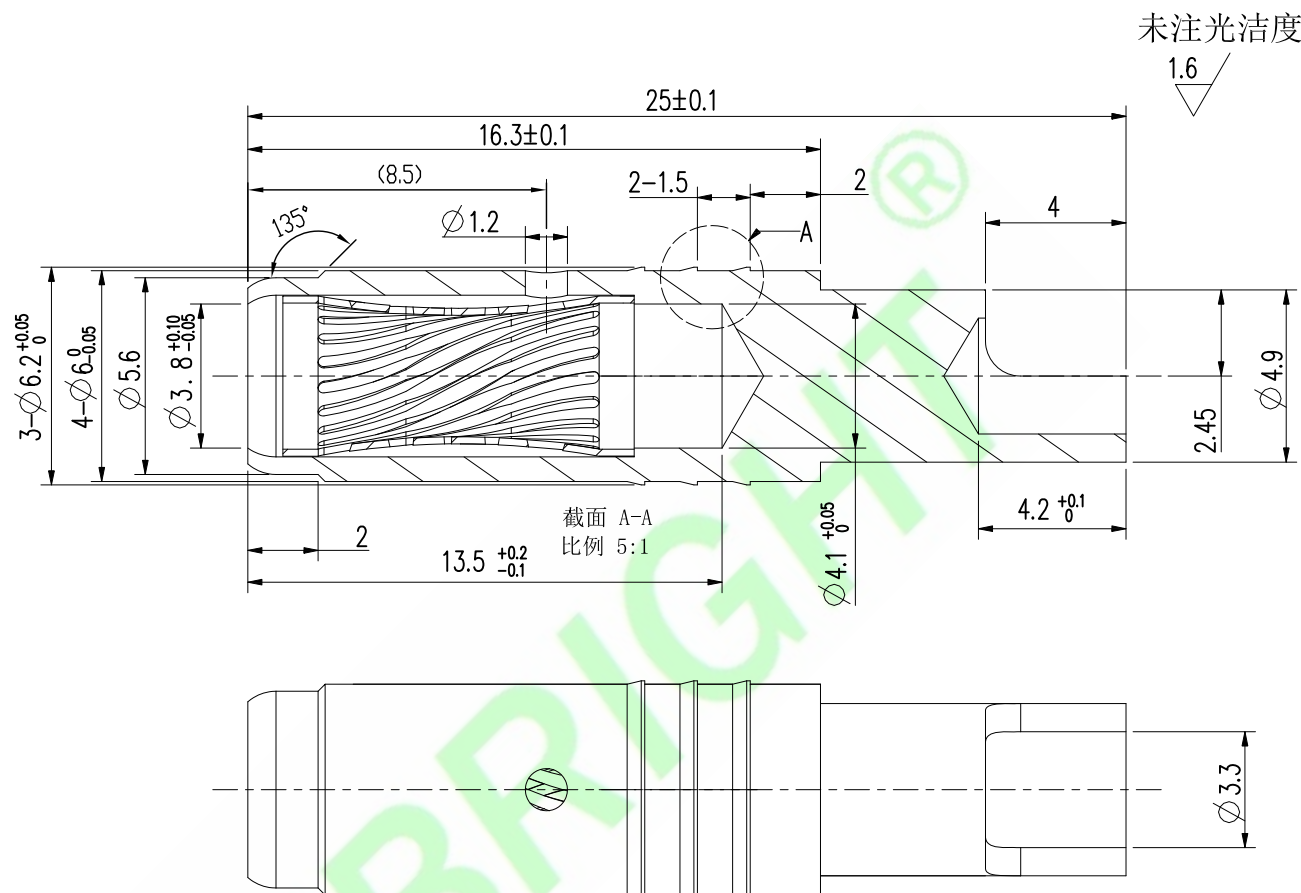

注:

1.材料

孔套: 黄铜Hpb59-1 铜底1um,镀镍0.5-1.5um,镀金0.05um,
扭簧: 铍铜QBe2.0 铜底1um,镀镍3um 镀金0.1um.

2.5%盐雾试验: 24小时

3.用 $\phi 3.57_{-0.005}^0$ 检验插针检验, 分离力在4N-12N之间

4.适配插针: $\phi 3.6_{(-0.03)}^0$

5.棱边倒钝, 未注公差按 ± 0.1

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO.:	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHE—E ELECTRONIC TECHNOLOGY LIMITED		
4X				Sophia	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	X.: ±0.30	X°: ±5.0°	TITLE :			
2X				Ren	X.X: ±0.20	X.X°: ±3.0°	Ø4mm扭簧插孔			
1X	ORIGINAL	Sophia		APPD.:	X.XX: ±0.15	X.XX°: ±2.0°				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX°: ±1.0°	DATE: 29-Oct-2020	SHEET: 1/1		A4
							SCALE: 1:1			
							UNIT: mm	THIRD ANGLE PROJECTION		