

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute



Ordering Information

S12762R-XXX48-X



1 2 3 4 5

- 1:— Series No.
2:— R/R/A Type
3:— No. of Positions
4:— A:Gold Flash
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray
F:W/Cap In Tape&Reel

$$0.4+1.27*\text{No. Of Positions}/2\pm0.3$$

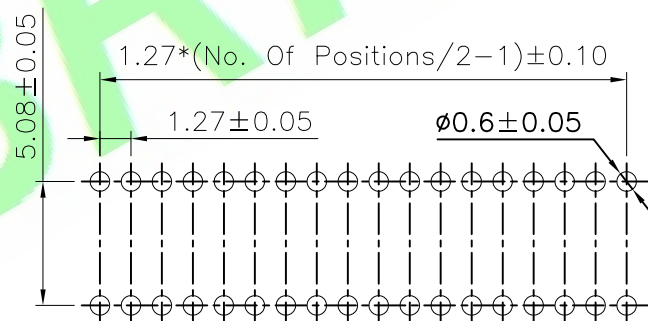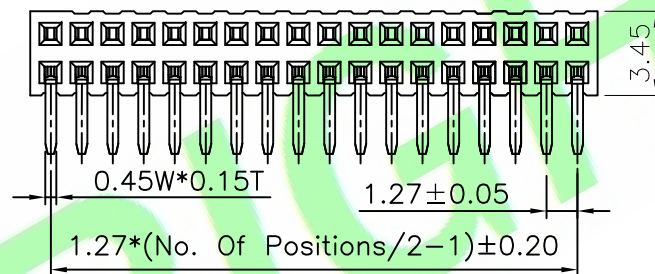

Recommended PCB Layout(Tolerance:0.05mm)

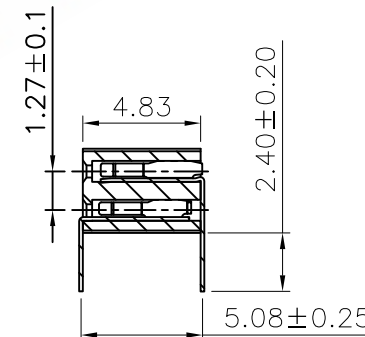

5X				DR.BY.: Samson	GENERAL TOLERANCE:	PART NO : S12762R-XXX48-X
4X					LINEAR	DWG. NO.: RD0807-010
3X				CHKD.: Tony	ANGLES	TITLE :
2X					X.: ±0.30	1.27mm Pitch PCB
1X	ORIGINAL	Samson		APPD.: Billy	X.X: ±0.20	Socket Header R/A Type Side Entry
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.15	DATE: 01-Jul-2008
					X.XXX: ±0.10	

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4