

Material And Finish:


Rating:

Electrical:

Ordering Information

S12762M-XXX48-0X

1:—Series No.
2:—M:SMT Type
3:—No. of Positions
4:—A:Gold Flash
Q:Tin Plated
6:—A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

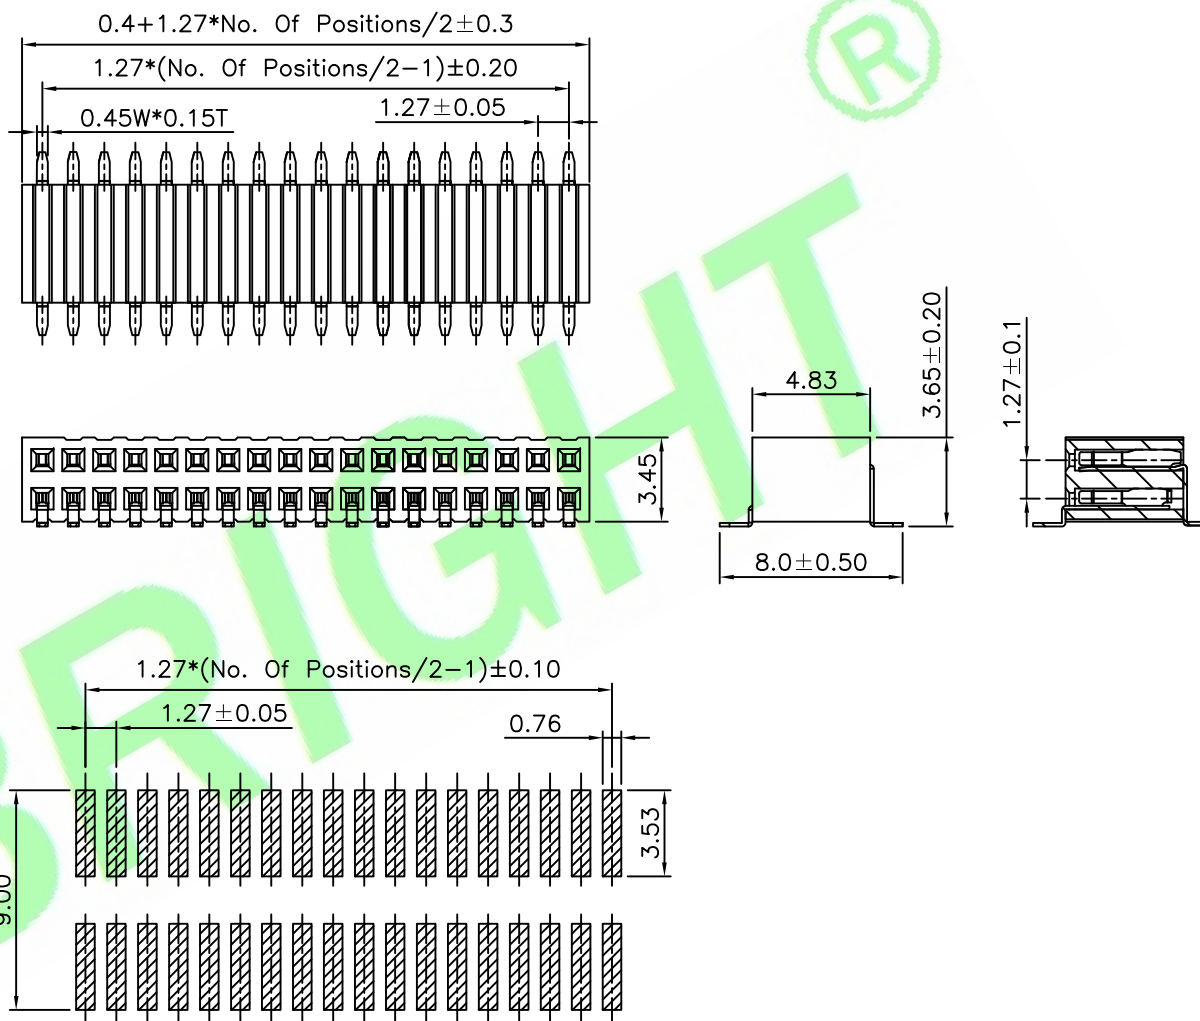

Recommended PCB Layout(Tolerance:0.05mm)

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12762M-XXX48-0X	HJBRIGHT 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				LINEAR	ANGLES	DWG. NO.: RD0807-009			
3X			CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type Side Entry	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
2X				x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson	APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 01-Jul-2008	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°			