

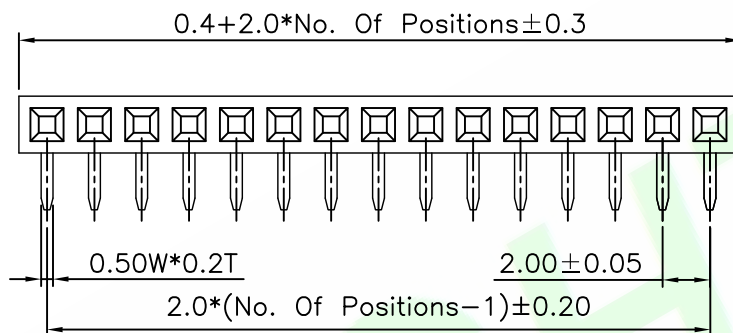



Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Withstanding Voltage:500V AC/Minute


$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray

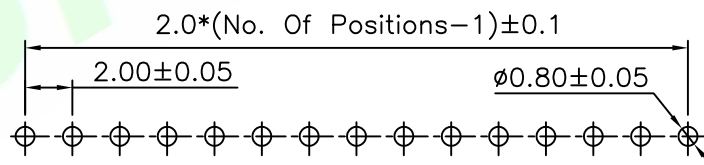

Recommended PCB Layout

5X				DR.BY.: joy chen	GENERAL TOLERANCE:		PART NO : S20031R-XXX43-NX		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.: RD0809-058					
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 2.0mm Pitch Socket Header R/A Type					
2X					x.x: ±0.20	x.x°: ±3.0°						
1X	ORIGINAL	joy chen		APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 16-Sep-2008		SHEET: 1/1		A4	
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx°: ±1.0°						
									SCALE: 1:1			
									UNIT: mm			