

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp





Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

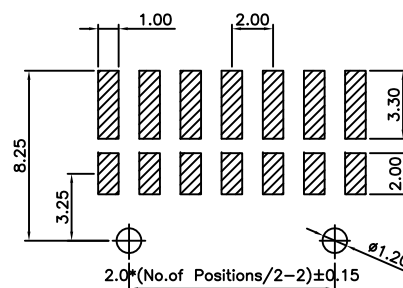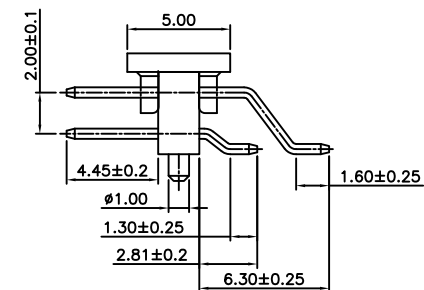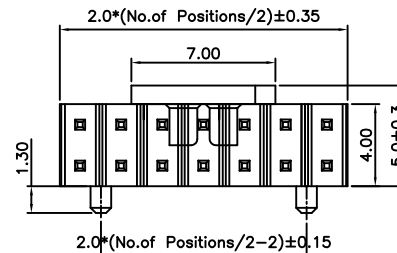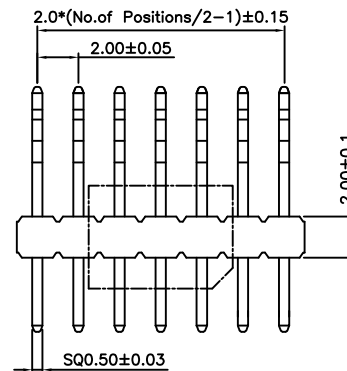

Recommended PCB Layout

Ordering Information

20022H-XXH103-NF-G

1 2 3 4 5

- 1: — Series No.
2: — H:Horizontal Type
3: — No. of Positions
4: — H:Selective Gold Plated
5: — F:W/CAP IN Tape&Reel

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : 20022H-XXH103-NF-G	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1	THIRD ANGLE PROJECTION	A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.: GSN:14202S9-32-1BNRP-60					
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch Pin Header Horizontal Type	DATE: 20-Jan-2015		SCALE: 1:1		
2X					X.X: ±0.25	X.X': ±3.0°		UNIT: mm				
1X	ORIGINAL	Kenry			X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°						