

RoHS Compliant

Specifications:**Material:**

Insulator: PBT UL94V-0

Color Black

Rating:

Current Rating: 3 Amp

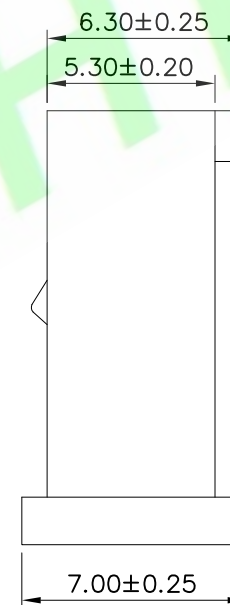
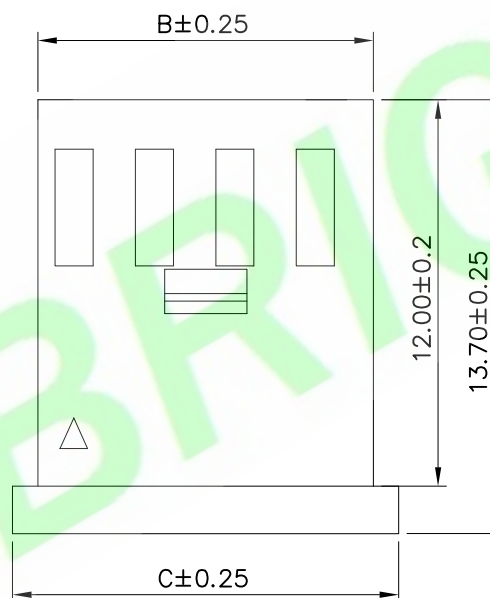
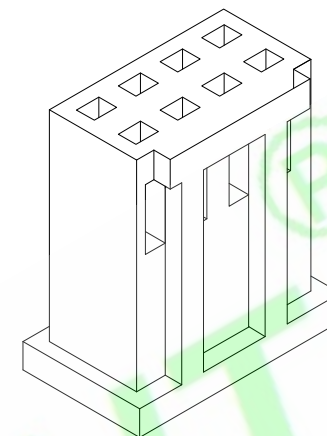
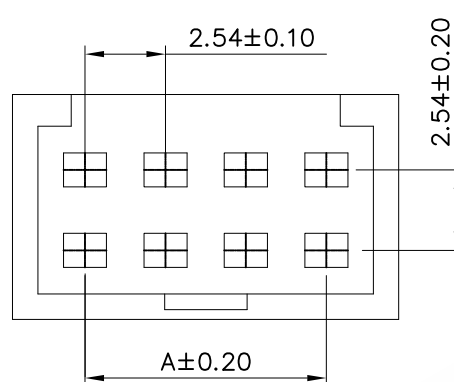
Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$ **Electrical:**

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1000V AC/Minute

**Ordering Information**

H2543S-XX-01

1

2

1: —Series No.

2: —No. of Positions

Poles	Dimensions (mm)		
	A	B	C
2*3P	5.08	8.06	9.66
2*4P	7.62	10.60	12.20
2*5P	10.16	13.14	14.74
2*6P	12.70	15.68	17.28
2*7P	15.24	18.22	17.78
2*8P	17.78	20.76	19.82
2*9P	20.32	23.30	22.36
2*10P	22.86	25.84	24.90
2*11P	25.40	28.38	27.44
2*12P	27.94	30.92	29.98
2*13P	30.48	33.46	32.52
2*14P	32.02	36.00	35.06
2*15P	35.56	38.54	37.60
2*16P	38.10	41.08	40.14
2*17P	40.64	43.62	42.86
2*18P	43.18	46.16	45.22
2*19P	45.72	48.70	47.76
2*32P	78.74	81.72	83.32

5X				DR.BY.: Apra	GENERAL TOLERANCE:		PART NO : H2543S-XX-01		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
4X						LINEAR	ANGLES	DWG. NO.:						
3X				CHKD.: Aaron	X.: ±	X': ±	TITLE : 2.54mm Pitch Housing		SHEET: 1/1			A4		
2X					X.X: ±0.25	X.X': ±			SCALE: 1:1					
1X	ORIGINAL	Apra		APPD.: Billy	X.XX: ±0.15	X.XX': ±	DATE: 24-Nov-2017		UNIT: mm				THIRD ANGLE PROJECTION	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.05	X.XXX': ±								