

SPECIFICATIONS :


Voltage Rating: 250V AC / DC
Current Rating: 4A AC / DC
Withstanding Voltage: 1000V AC/minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.

Ordering Information

H2543T-PX-01

1 2 3

1: — Series No.
2: — Terminal
3: — A:Gold Flash
Q: Tin Plated

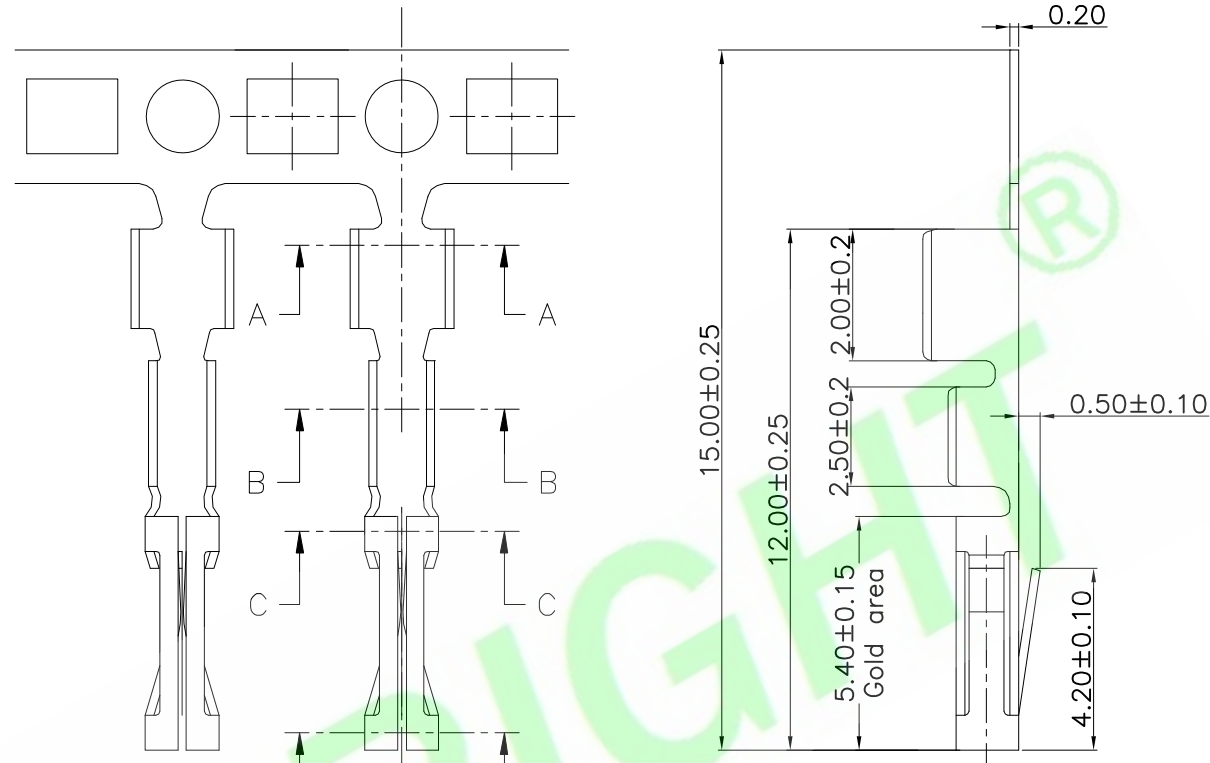

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
H2543T-PQ-01	AWG#22-#26	1.55mm(max)	Phosphor Bronze	Tin-plated	15,000pcs
H2543T-PA-01	AWG#22-#26	1.55mm(max)	Phosphor Bronze	Gold-flash	15,000pcs


5X				DR.BY: Apra
4X				
3X				CHKD.: Aaron
2X				
1X	ORIGINAL	Apra		APPD.: Billy
REV.	DESCRIPTION	DR.BY	ECN. NO.	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±	X': ±
X.X: ±0.25	X.X': ±
X.XX: ±0.15	X.XX': ±
X.XXX: ±0.05	X.XXX': ±

PART NO : H2543T-PX-01
DWG. NO.:
TITLE : 2.54mm Pitch Crimp Terminal
DATE: 24-Nov-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4