

ENGINEERING DEPT.		PRODUCT SPECIFICATION F0525H-XXA-02-F-NH	SPEC.NO.: F0525H
REVISIONS	A		PAGE: 1/6

1. SCOPE:

This product specification contains the test method the general performance and requirement for F0525H series connectors.

2. APPLICABLE DOCUMENTS:

Reference documents listed below shall be the latest revision unless otherwise specified. Should a conflict occur between this specification and any of the listed documents then this specification shall prevail.

2.1 Industry standards :

EIA-364-□□ electrical connector test procedures

3. SHAPE, CONSTRUCTION AND DIMENSIONS

See attached drawings

4. MATERIALS

See attached drawings

5. ACCOMMODATED P.C. BOARD

5.1 Thickness: 0.5 mm (.020") ~ 2.0 mm (.079")

5.2 P.C. Board Layout: See attached drawings

6.FPC/FFC RECOMMENDED SPECIFICATION:

Thickness : 0.30 ± 0.03 mm (.012 \pm .001")

APPROVED : Billy CHECKED : Mark PROVIDED : Tsw .

ENGINEERING DEPT.		PRODUCT SPECIFICATION F0525H-XXA-02-F-NH	SPEC.NO.: F0525H
REVISIONS	A		PAGE: 2/6

7. ELECTRICAL PERFORMANCE:

	ITEM	TEST CONDITION	REQUIREMENT
7.1	Rated current and voltage		0.5A 50V AC/DC
7.2	Contact Resistance	Measured at 20 mV maximum open circuit at 100mA .Mated test contacts must be in a connector housing. (EIA364-23)	Initially :Less than 20 mΩ Finally :Less than 40 mΩ
7.3	Dielectric strength	Test between adjacent contacts with a voltage of 500V AC for 1 minute at Sea level. (EIA364-20 Method B)	No current leakage and flashover or damage detected.
7.4	Insulation Resistance	After 500V DC for 1 minute , measure the insulation resistance between the adjacent contacts. (EIA364-21)	More than 1000 MΩ

8. MECHANICAL PERFORMANCE:

	ITEM	TEST CONDITION	REQUIREMENT
8.1	FFC/FPC Retention Force	Apply axial load to FFC/FPC by operating at the speed rate of 25 mm per minute.	0.02 Kgf / Pin min.
8.2	Durability	Mate applicable FFC/FPC and insert and withdraw actuator at the speed rate of 25 mm per minute. Times :Up to 20 cycles.	Appearance : No damage Contact Resistance : Less than 40 mΩ FFC/FPC retention force shall meet requirement of 8.1

9. ENVIRONMENTAL PERFORMANCE:

	ITEM	TEST CONDITION	REQUIREMENT
9.1	Temperature rise	The object of this test procedure is to detail a standard method to assess the current carrying capacity of mated battery connector contact. (EIA364-70 Method B)	0.5 A per pin minimum. The temperature rise above ambient shall not exceed 30°C at any point in the connector when contact positions are powered. The ambient condition is still air at 25°C.

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

ENGINEERING DEPT.		PRODUCT SPECIFICATION	SPEC.NO.: F0525H
REVISIONS	A		PAGE: 3/6

	ITEM	TEST CONDITION	REQUIREMENT
9.2	Vibration	Subject mated FFC/FPC, All contacts shall be connected in series and DC 100mA shall be applied. Frequency:10~55 Hz Full amplitude1.5mm in 3 directions for 2 hours respectively. (EIA 364 – 28 Condition I)	Appearance: No damage Discontinuity: 1 micro second max.
9.3	Physical Shock	Subject mated FFC/FPC to 50 g's half-sine shock pulses of 11ms duration. Three shocks in each direction applied along three mutually perpendicular planes for a total of 18 shocks. (EIA364-27 condition A)	Appearance: No damage Discontinuity: 1 micro second max.
9.4	Solder ability	Steam age 1 hour at 90°C~96°C Solder time to be 5±1 seconds at 245°C, using unactivated flux. (EIA364-52)	Minimum: 95% of immersed area
9.5	Resistance to soldering heat	Soldering time: 10 Sec Max. Soldering pot: 250~260°C max. Reflow soldering (Infrared): Refer soldering method The conditions specified on the recommended temperature profile Shall be repeated twice.	No damage
9.6	Heat aging	Subject unmated connectors to temperature life at 85°C±2°C for 96 hours. (EIA 364 – 17 Test Condition III Method A)	Appearance : No damage Contact resistance : 40 mΩ Max.
9.7	Humidity	Subject unmated connectors to 96 hours at 40°C with 90% to 95% RH. (EIA 364 – 31 Method II Test Condition A)	Appearance : No damage Contact resistance : 40 mΩ Max. Insulation resistance : More than 500 MΩ
9.8	Temperature cycling	Subject unmated connectors shall be tested in accordance with EIA364-32 Test Condition I . (1)-55°C ,30 minute (2)+25°C ,5 minute (3)+85°C ,30 minute (4)+25°C ,5 minute consecutive 10 cycles.	Appearance: No damage Contact resistance : 40 mΩ Max.

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED


ENGINEERING DEPT.		PRODUCT SPECIFICATION	SPEC.NO.: F0525H
REVISIONS	A		PAGE: 4/6

	ITEM	TEST CONDITION	REQUIREMENT
9.9	Salt Spray	<p>Temperature: $35 \pm 3^{\circ}\text{C}$ Solution: $5 \pm 1\%$ Spray time: 48 ± 4 hours (Stamping before plated) Spray time: 24 ± 4 hours (Stamping after plated) Mate connectors and expose to the following salt mist conditions. Upon completion of the exposure period, salt deposits shall be removed by a gentle wash or dip in running water and dried naturally, after which the specified measurements shall be performed. The specimens shall be suspended from the top using waxed twine, string or nylon thread. The test only define the plating area, without plating area (as copper cross section) will not be defined. (EIA 364-26B / MIL-STD-202 Method 101)</p>	<p>Appearance: No damage on function Contact resistance : 40 mΩ Max.</p>
9.10	Mixed Flowing Gas	<p>There shall be no change in contact resistance greater than 20 mΩ from initial when mated specimens are subjected to environmental class II . Test as per EIA364-65 for 4 days mated. Relative Humidity : $70 \pm 2\%$ Relative Temp. : $30 \pm 2^{\circ}\text{C}$ Pollutant Concentration : Cl₂ : 10 ± 3 ppb NO₂ : 200±50 ppb H₂S : 10 ± 5 ppb</p>	<p>Appearance: No damage Contact resistance : 40 mΩ Max.</p>
9.11	Hand Soldering Method	<p>Use a soldering iron that has a sufficient head capacity and high stability of temperature. The tip of the iron should be shaped so as not to touch the part body directly. Temperature : $380 \pm 10^{\circ}\text{C}$ 3s</p>	No damage

10.Operating temperature range : -40°C to $+105^{\circ}\text{C}$; Storage temperature range : -40°C to $+85^{\circ}\text{C}$

ENGINEERING DEPT.		PRODUCT SPECIFICATION F0525H-XXA-02-F-NH	SPEC.NO.: F0525H
REVISIONS	A		PAGE: 5/6


11.Recommended Temperature Profile(Lead-Free):

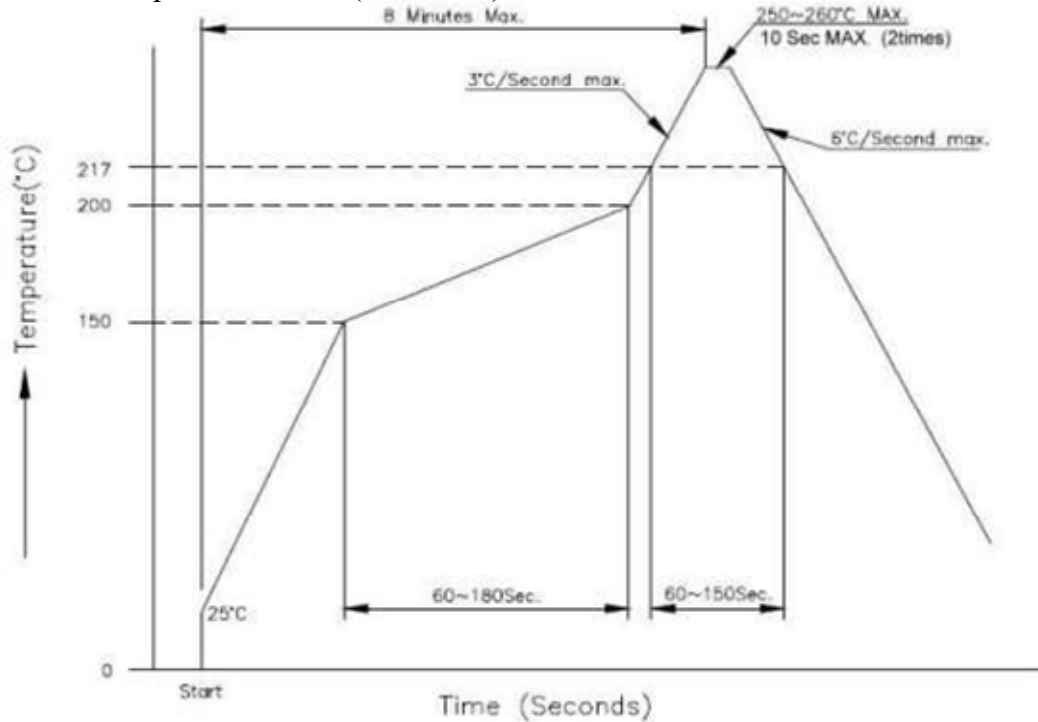



12. OPERATING INSTRUCTIONS AND PRECAUTIONS:

12.1 Operating instruction

12.1.1 Lift up the actuator. Use thumb or forefinger.

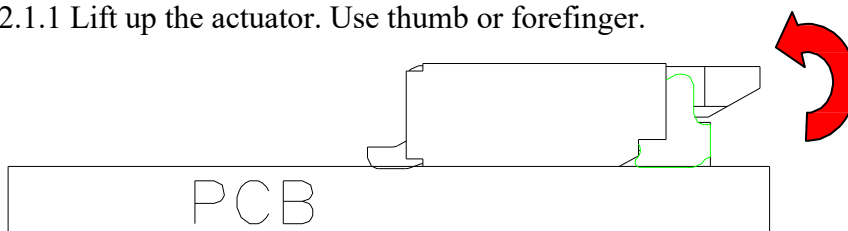


12.1.2 Fully insert the FFC/FPC in the connector parallel to mounting surface, with the exposed conductive traces facing down. And ensure that the FFC/FPC is properly inserted into the connector insertion slot.

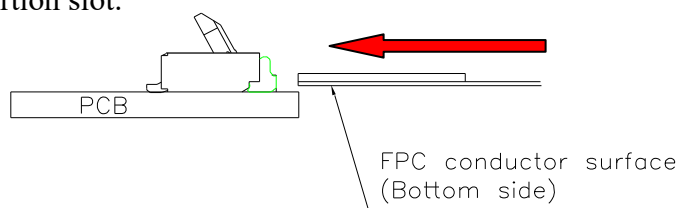


ENGINEERING DEPT.		PRODUCT SPECIFICATION F0525H-XXA-02-F-NH	SPEC.NO.: F0525H
REVISIONS	A		PAGE: 6/6

12.1.3 Rotate down the actuator until firmly closed. It is critical that the inserted FFC/FPC is not moved and remains fully inserted.

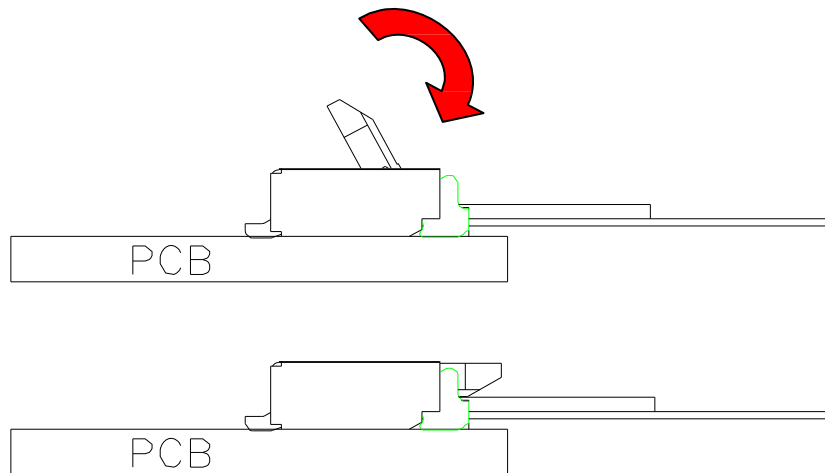

12.1.4 Lift up the actuator and pull out the FFC/FPC after the lock is released.

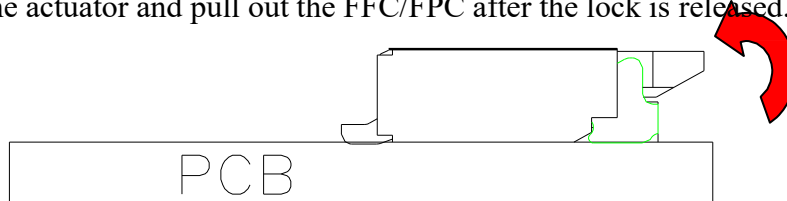

12.2 Precautions for use

Do not apply force in the upward direction (as illustrated). Do not bend the FPC/FFC too close to the actuator.

