

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Color:Natural

Rating:

Current Rating:7.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

H396SDN-XX-X



1 2 3

1: — Series No.



2: — No. of Positions

3: — 0:W/O Peg

1:W/Peg

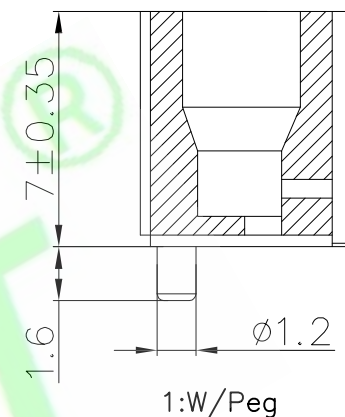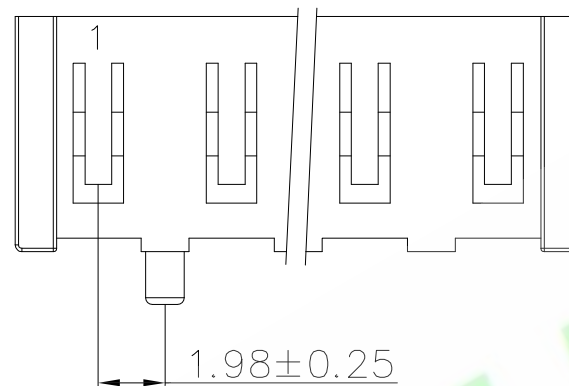

1:W/Peg

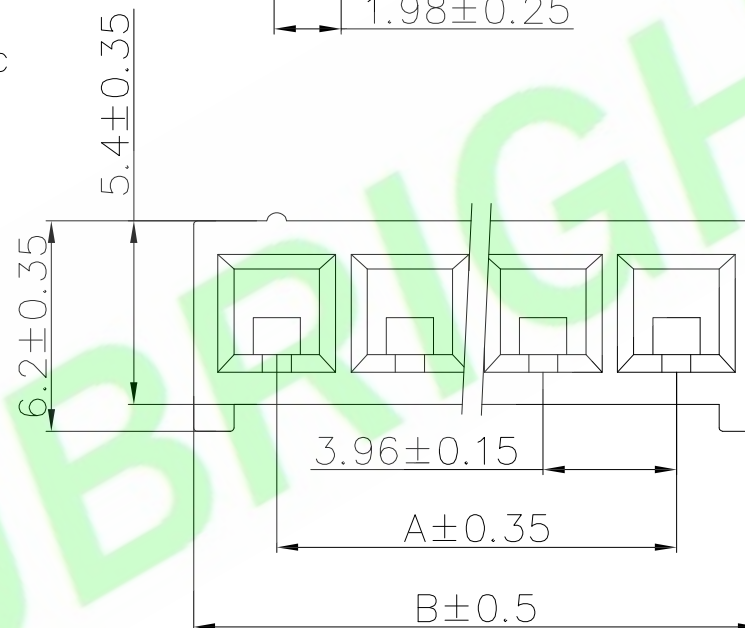

0:W/O Peg

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
2	3.96	9.02	8	27.72	32.78
3	7.92	12.98	9	31.68	36.74
4	11.88	16.94	10	35.64	40.7
5	15.84	20.9	11	39.6	44.66
6	19.8	24.86	12	43.56	48.62
7	23.76	28.82	-	-	-

5X				DR.BY.:	Mark	GENERAL TOLERANCE:		PART NO : H396SDN-XX-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X							LINEAR	ANGLES				
3X				CHKD.:	Tony	X.:	X°: ±5.0°	DWG. NO.:		SHEET: 1/1 SCALE: 1:1 UNIT: mm THIRD ANGLE PROJECTION		
2X							X.X: ±0.20	X.X°: ±3.0°	TITLE :			
1X	ORIGINAL	Mark		APPD.:	Billy	X.XX: ±0.15	X.XX°: ±2.0°	SDN 3.96mm PITCH Housing		A4		
REV.	DESCRIPTION	DR.BY	ECN. NO.				X.XXX: ±0.10	X.XXX°: ±1.0°	DATE: 10-Oct-2021			

A4