

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 9T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

25041M-03S093-G

1 2 3 4 5


1:—Series No.

2:—M:SMT Type

3:—No. of Positions

4:—S:Matte Tin Plated

5:—G:W/O Cap In Tape&Reel

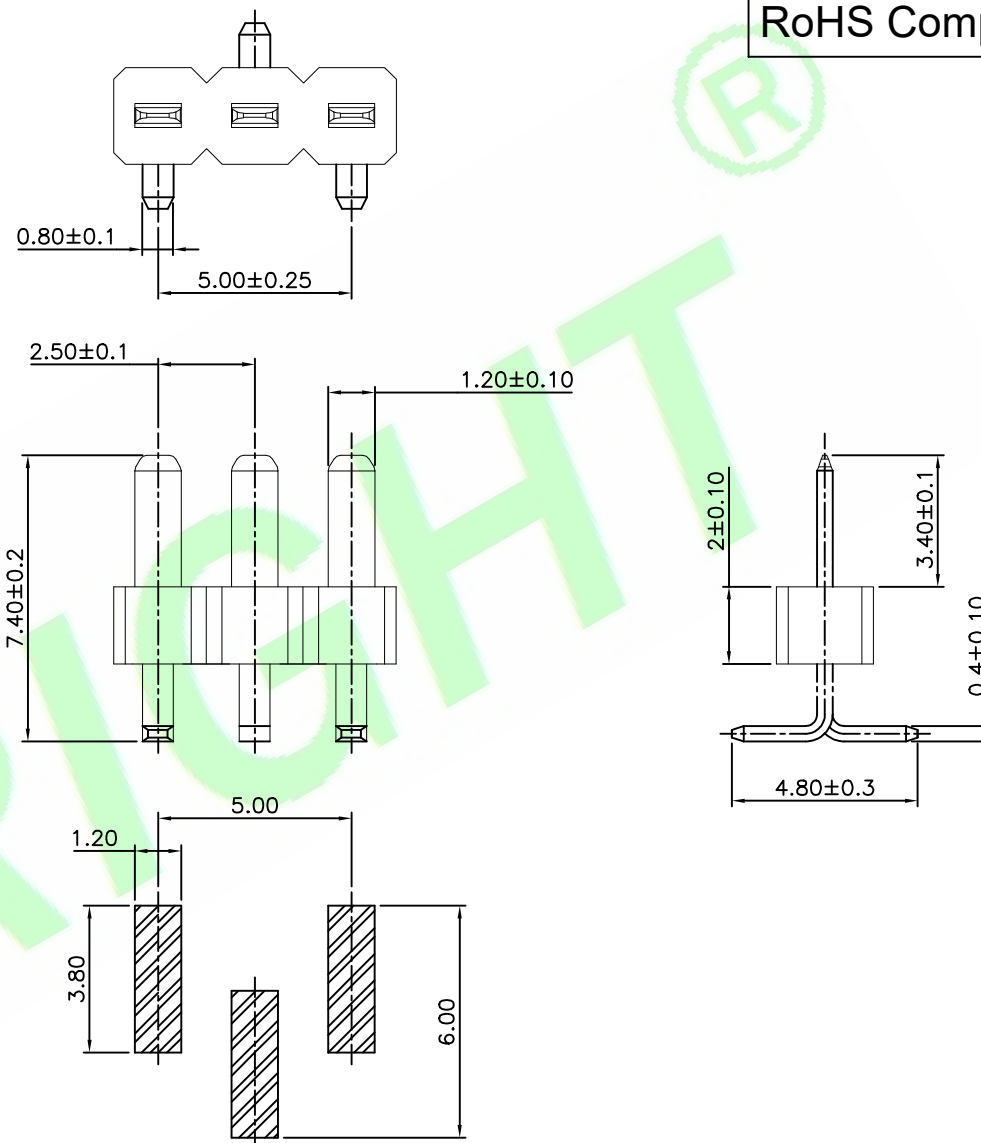

Recommended PCB Layout

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 25041M-03S093-G	HJBRIGHT ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
	LINEAR	ANGLES				
CHKD.: Hu.ch	x.: ±0.30	x': ±5.0°	TITLE : 2.50mm Pitch Pin Header SMT Type	SHEET: 1/1		A4
	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 1-Mar-2020			

1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO.