

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

25411S-XXX109-XX
1 2 3 4 5 6

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — A: Gold Flash

D: Gold 10u"

H: 10u" Gold on Contact; Gold Flash on tail

J: Contact: Gold Flash, Solder Tail: Matte Tin Plated

T: Contact: Gold 10u"; Solder tail: Matte Tin Plated.

S: Matte Plated



Q: Tin Plated

5: — N: PA6T

G: PA9T

6: — A: In bag

B: In Tube

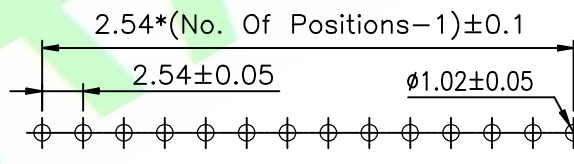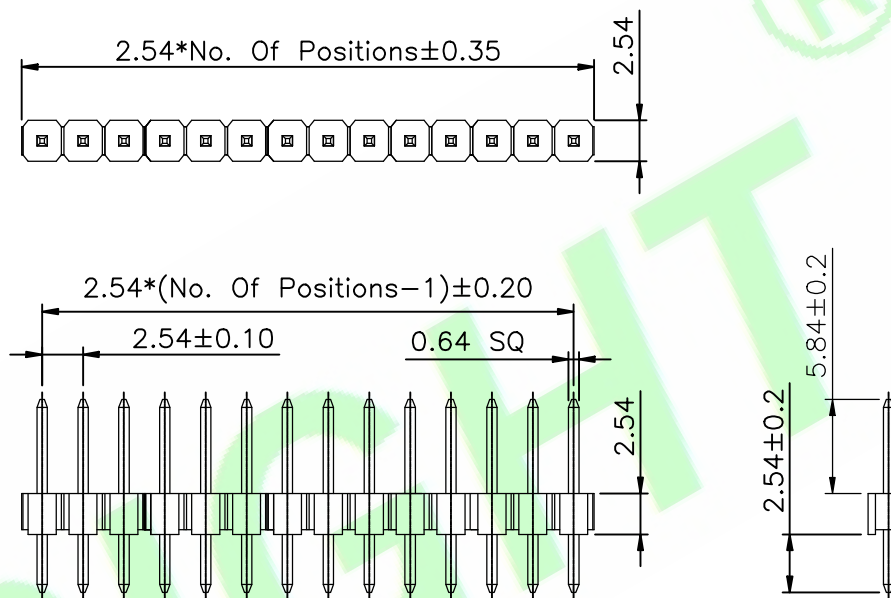

Recommended PCB Layout

2X	DIP CHANGE 3.6MM	joy chen	
1X	ORIGINAL	joy chen	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 25411S-XXX109-XX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 2.54mm Pitch Pin Header Straight Type
	X.XXX: ±0.10	X.XXX': ±1.0°	
			DATE: 19-Aug-2008

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4