

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Copper Alloy

Plated:See Ordering Information

Specification:

Current Rating:3A

Voltage Rating:250V

Temperature Rating:-40°C~105°C

Ordering Information

25481H-04T158A-F

1 2 3 4 5


1:—Series No.

2:—H:Horizontal SMT




3:—No. of Positions

4:—T:10u" Gold on contact; Matte Tin on tail

5:—F: W/Cap In Tape&Reel

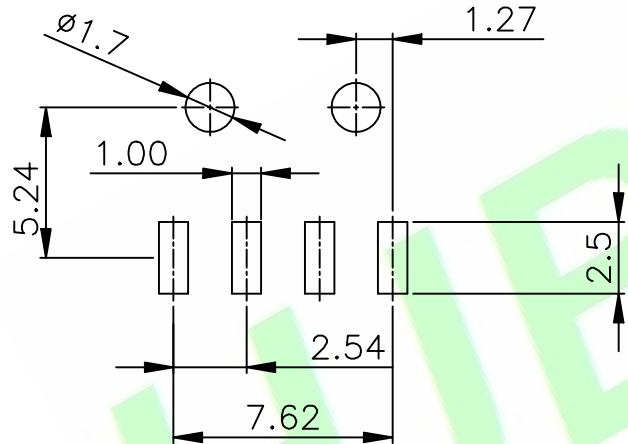

Recommended PCB Layout

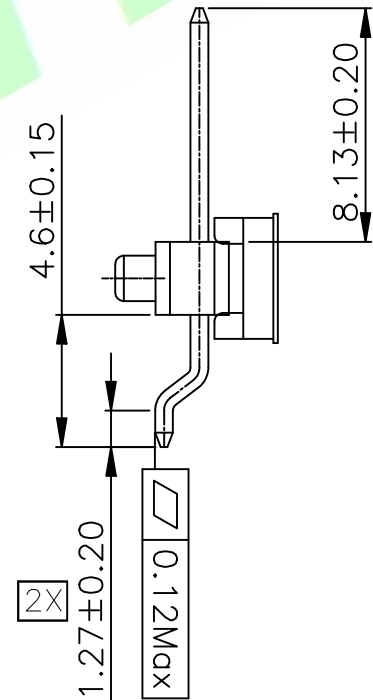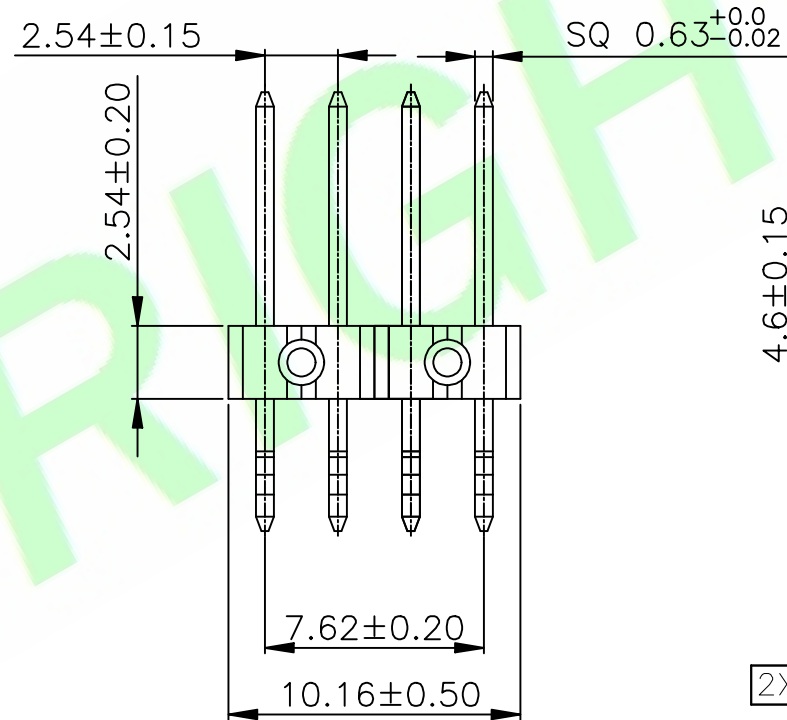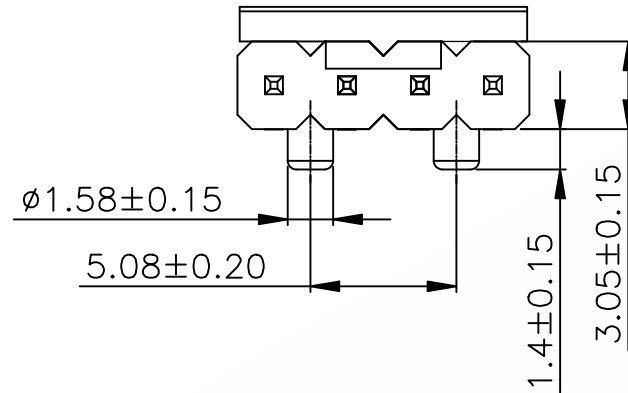

				DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : 25481H-04T158A-F		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
						LINEAR	ANGLES					
				CHKD.: Aren	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch Pin Header Horizontal SMT Type		SHEET: 1/1			A4
2X Updated dimensional tolerance JoinZm 20250315					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X ORIGINAL Aren				x.xx: ±0.15	x.xx': ±2.0°	UNIT: mm						
REV.	DESCRIPTION			DR.BY	ECN. NO	APPD.: Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 17-Mar-2023		THIRD ANGLE PROJECTION	
				1	2	3	4	5	6	7	8	