

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Small terminal(H70)

Big terminal(C7025)

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

35012R-12S212-X

1 2 3 4 5

1: — Series No.






2: — R/R/A Type

3: — No. of Positions

4: — S:Matte Tin Plated

5: — B:In Tube

C:In Tray

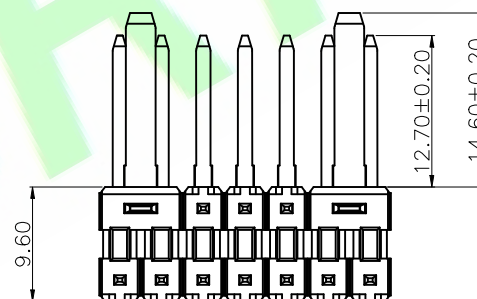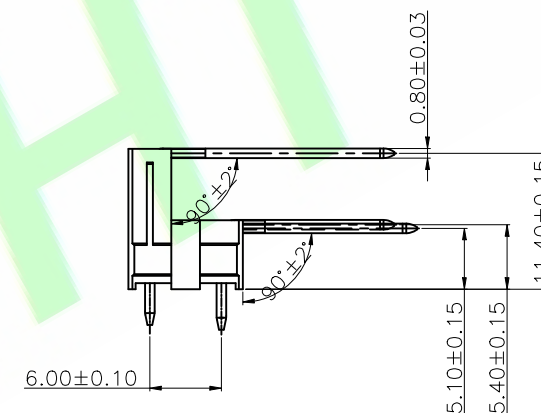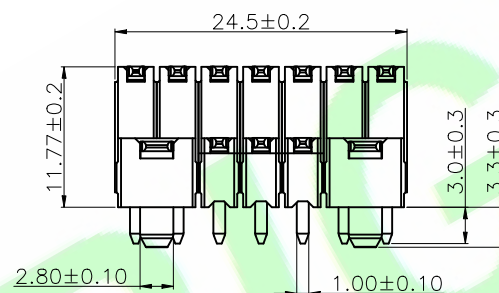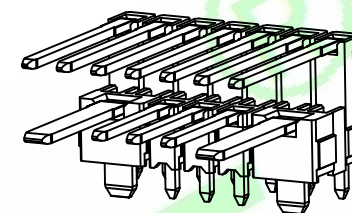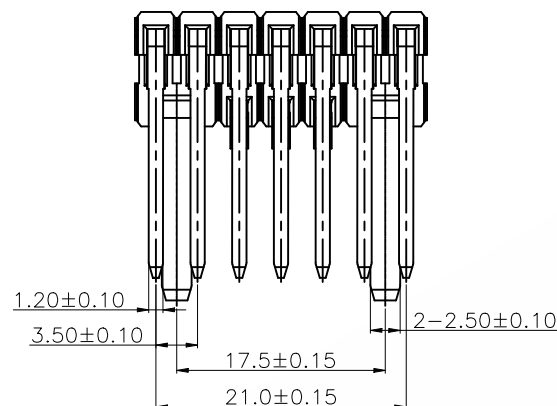

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : 35012R-12S212-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:				
3X				APPD.: Billy	X.: ±	X': ±5.0°	TITLE : 3.5X6.0mm Pitch Pin Header R/A type	SHEET: 1/1	THIRD ANGLE PROJECTION		
2X					X.X: ±0.20	X.X': ±3.0°	DATE: 24-Jul-2019	SCALE: 1:1			
1X	ORIGINAL	Aaron			X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°					