

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp




Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

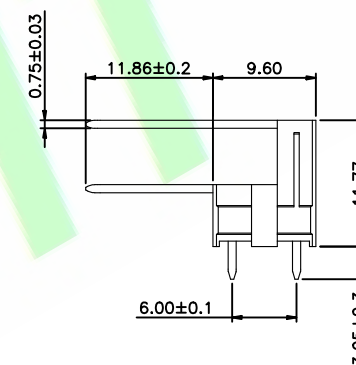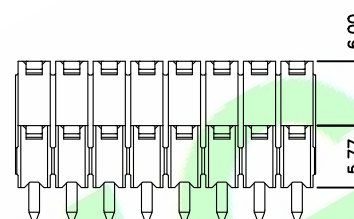




Ordering Information

35012R-16S212-X

1 2 3 4 5

- 1:— Series No.
2:— R/R/A Type
3:— No. of Positions
4:— S:Matte Tin Plated
5:— B:In Tube
C:In Tray

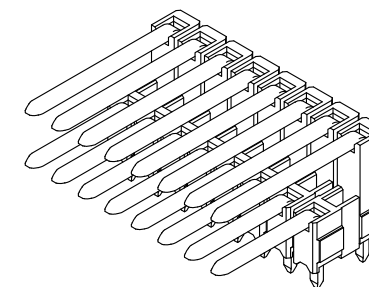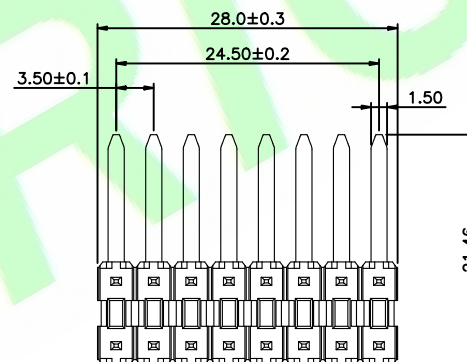

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : 35012R-16S212-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±	x': ±5.0°	TITLE : 3.5X6.0mm Pitch Pin Header R/A type	SHEET: 1/1			A4
2X					x.x: ±0.50	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 24-Jul-2019	THIRD ANGLE PROJECTION			