

Specifications:






- 1.Current Rating: 3 Amp
- 2.Voltage Rating:DC 24V
- 3.Contact resistance: 30m Ohm Max
- 4.Withstanding Voltage: 500V DC
- 5.Insulation Resistance:1000MOhm min
- 6.Operation Temperature:-40°C to +105°C

Ordering Information

40013S-XXX187-NX

1 2 3 4 5

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — S: Matte Tin Plated
Q: Tin Plated
5: — A: In Bag
B: In Tube
C: In Tray

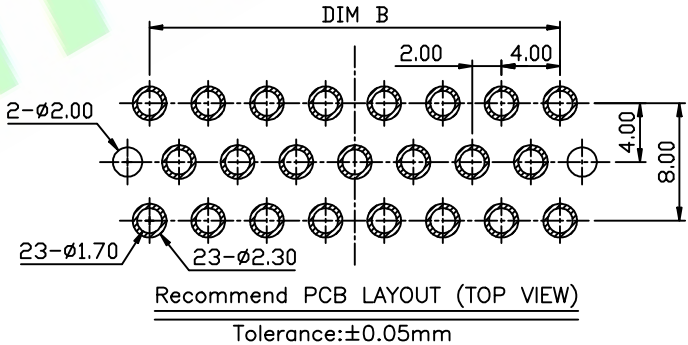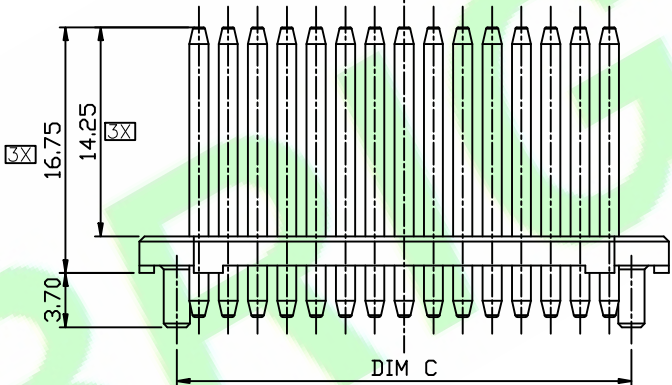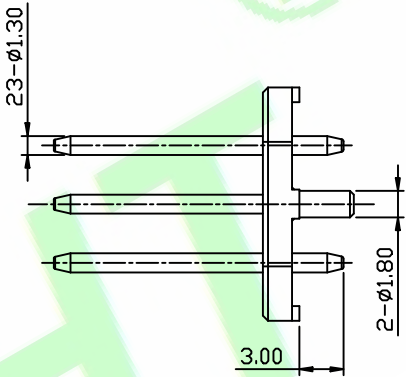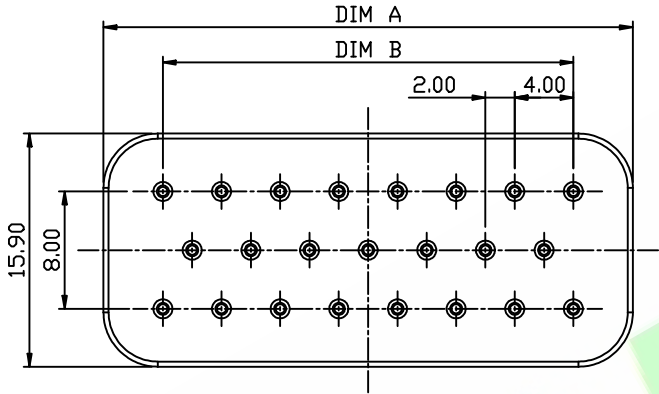


POSITIONS	DIM A	DIM B	DIM C
23	36.10	28.00	31.00
35	52.1	44.00	47.00

2	TERMINAL	23/35	Brass	Sn PLATING
1	HOUSING	1	PA6T	BLACK
No.	PART NAME	MANY	MATERIAL	FINISH

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : 40013S-XXX187-NX
	LINEAR	ANGLES	DWG. NO.:
CHKD.: Hu.CH	x.: x.x: ±0.40	x': ±5.0° x.x': ±3.0°	TITLE : 4.0 PITCH插针连接器
APPD.: Billy	x.xx: ±0.25 x.xxx: ±0.15	x.xx': ±2.0° x.xxx': ±1.0°	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4