

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:1.2 Amp Max

Voltage Rating:30V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:200V AC/Minute

Ordering Information

A0802H-XXX-01-G

1 2 3 4 5

1:— Series No.

2:— H:Horizontal SMT Type




3:— No. of Positions

4:— Q:Tin Plated

S:Matte Tin Plated

5:— B:In Tube

G:In Tape&Reel

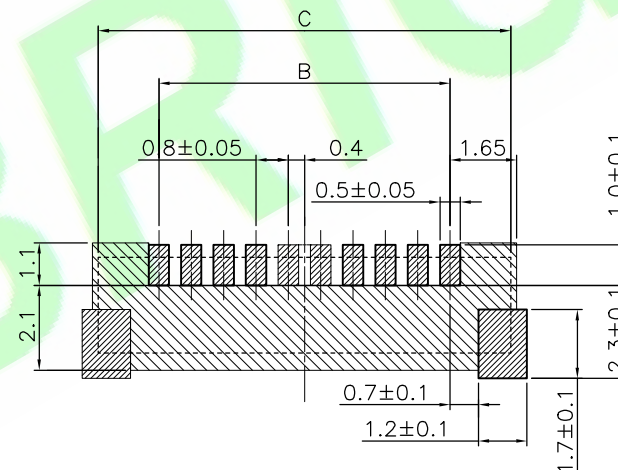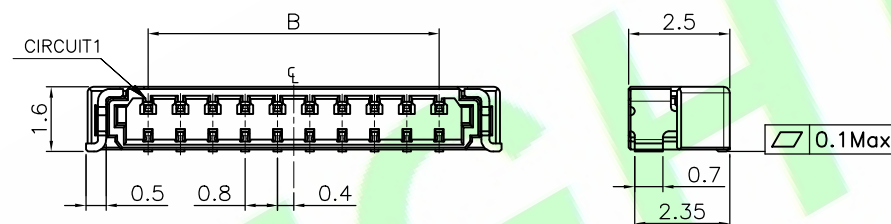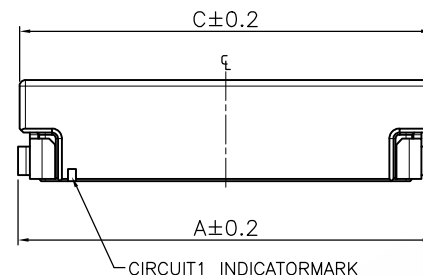

Circuit No	Dimensions		
	A	B	C
2	3.88	0.80	3.80
3	4.68	1.60	4.60
4	5.48	2.40	5.40
5	6.28	3.20	6.20
6	7.08	4.00	7.00
7	7.88	4.80	7.80
8	8.68	5.60	8.60
9	9.48	6.40	9.40
10	10.28	7.20	10.20
11	11.08	8.00	11.00
12	11.88	8.80	11.80
13	12.68	9.60	12.60
14	13.48	10.40	13.40
15	14.28	11.20	14.20
16	15.08	12.00	15.00
17	15.88	12.80	15.80
18	16.68	13.60	16.60
19	17.48	14.40	17.40
20	18.28	15.20	18.20

DR.BY.: Zolin

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : A0802H-XXX-01-G

CHKD.: Tony

x.: ±0.30

x': ±5.0°

DWG. NO.:

APPD.: Billy

x.x: ±0.20

x.x': ±3.0°

TITLE :

x.xx: ±0.15

x.xx': ±2.0°

0.8mm Pitch Wafer Horizontal SMT Type

x.xxx: ±0.10

x.xxx': ±1.0°

DATE: 15-Jan-2024

HJBRIGHT®

東莞市華晶電子有限公司


BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	ECN. NO

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4