

Specifications:

Material And Finish:

Insulator:LCP UL94V-0,Color:Natural/Black

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:100M ohm min.




Withstanding Voltage:500V AC/Minute

Ordering Information




A0805M-XXH-01-XX

1 2 3 4 56

- 1:— Series No.
 2:— M:SMT Type
 3:— No. of Positions
 4:— H:Gold flash on contact;
 Matte Tin on tail
 5:— N:Natural
 B:Black
 6:— B:In Tube
 C:In Tray
 E:W/Cap In Tube
 F:W/Cap In Tape&Reel

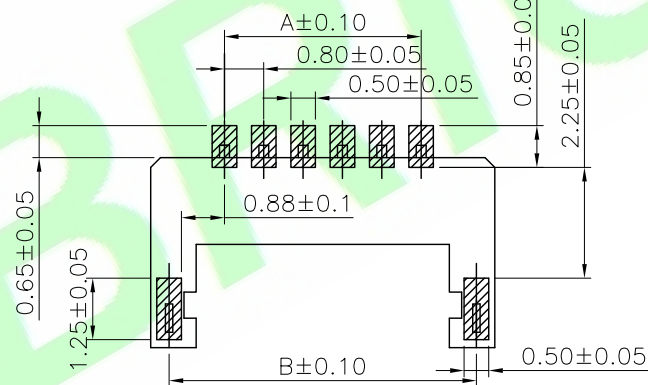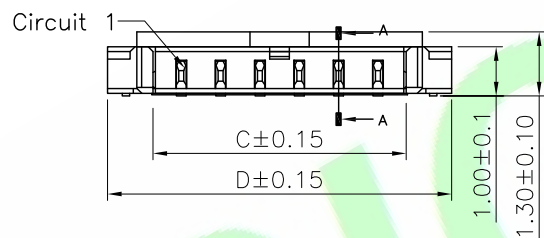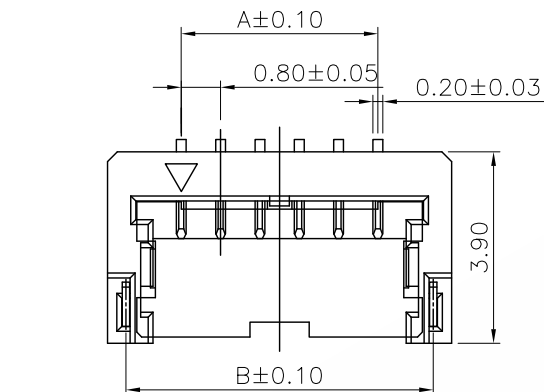

PCB LAYOUT

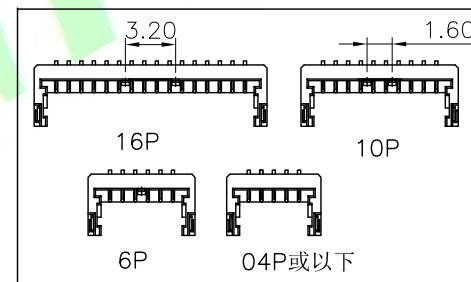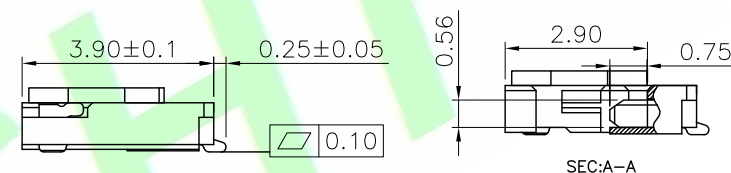

Poles	Dimensions			
	A	B	C	D
04	2.40	4.65	3.55	5.40
06	4.00	6.25	5.15	7.00
10	7.20	9.45	8.35	10.20
16	12.00	14.25	13.15	15.00

5X			
4X			
3X			
2X	Update code options	Judyyan	20220806
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A0805M-XXH-01-XX

DWG. NO.:

TITLE :

0.8mm Pitch Wafer SMT Type

DATE: 02-Jun-2017

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4