

Specifications:

Material And Finish:

Insulator: LCP UL94V-0 Color: Natural

Contact: Phosphor Bronze

Plated: See Ordering Information

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 200V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$

Electrical:

Contact resistance: 40m Ohm Max

Insulator resistance: 100M ohm min.


Withstanding Voltage: 500V AC/Minute

Ordering Information

A1006H-XXH-01-D

1 2 3 4 5

- 1: — Series No.
2: — H: Horizontal SMT Type
3: — No. of Positions
4: — H: Gold flash on contact;
Matte Tin on tail
5: — D: In Tape & Reel

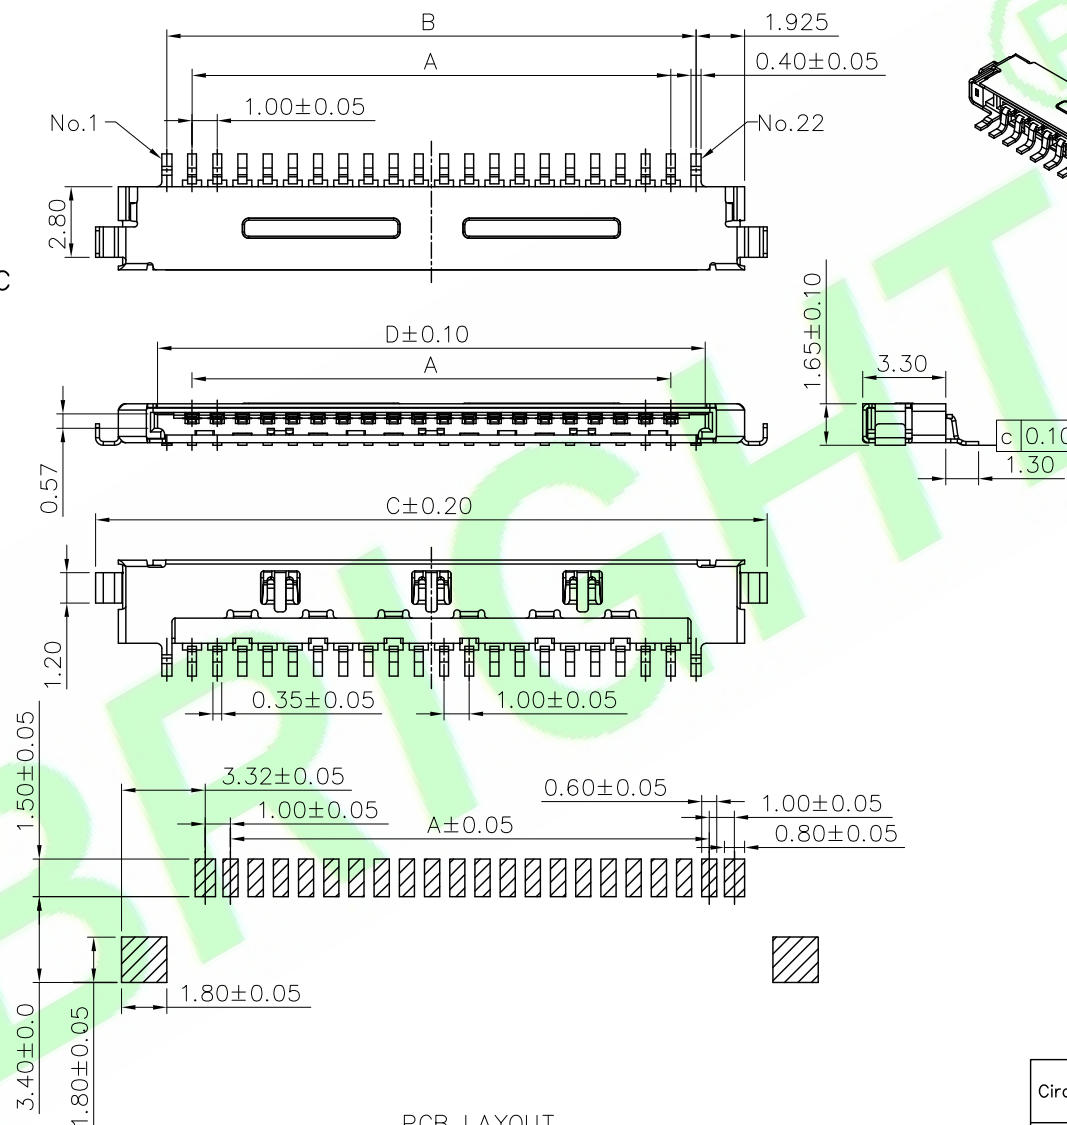

PCB LAYOUT

Circuit	Dimensions			
	A	B	C	D
20	19.00	21.00	26.65	22.00
30	29.00	31.00	36.65	32.00


5X				DR.BY: Samson	GENERAL TOLERANCE:		PART NO : A1006H-XXH-01-D
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Tony	X.: ± 0.30	X': $\pm 5.0^{\circ}$	TITLE :
2X					X.X: ± 0.25	X.X': $\pm 3.0^{\circ}$	1.0mm Pitch Wafer Horizontal SMT Type
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ± 0.15	X.XX': $\pm 2.0^{\circ}$	DATE: 02-Jun-2017
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ± 0.10	X.XXX': $\pm 1.0^{\circ}$	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4