

Specifications:

Material And Finish:

Insulator:LCP/PA6T UL94V-0 Color:Natural

Contact: Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information


A1253H-XXX-01-XD

1 2 3 4 56




- 1: — Series No.
2: — H:Horizontal SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
S:Matte Tin Plated
5: — C:LCP
N:PA6T
6: — D:In Tape&Reel




2~3P 封装

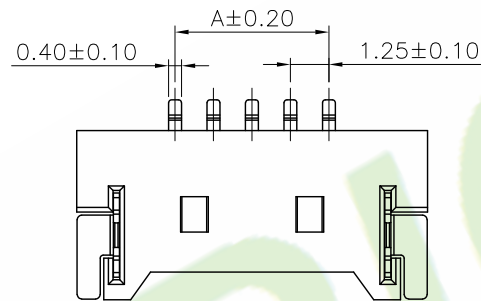

4~30P 封装

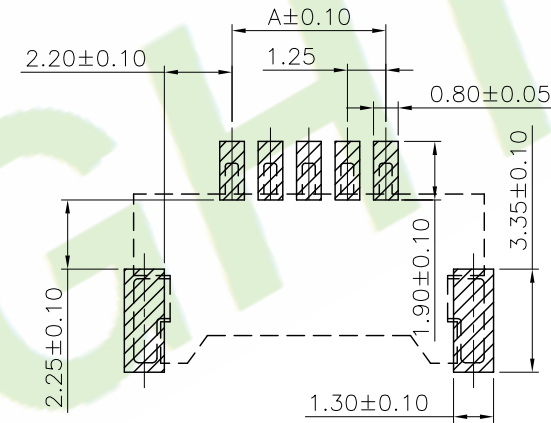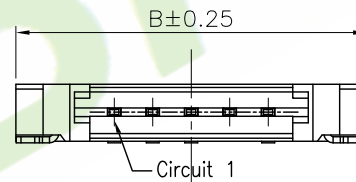

P.C.B. LAYOUT



Circuits	Dimensions	
	A	B
02	1.25	7.65
03	2.50	8.90
04	3.75	10.15
05	5.00	11.40
06	6.25	12.65
07	7.50	13.90
08	8.75	15.15
09	10.00	16.40
10	11.25	17.65
11	12.50	18.90
12	13.75	20.15
13	15.00	21.40
14	16.25	22.65
15	17.50	23.90
16	18.75	25.15
17	20.00	26.40
18	21.25	27.65
19	22.50	28.90
20	23.75	30.15
21	25.00	31.40
22	26.25	32.65
23	27.50	33.90
24	28.75	35.15
25	30.00	36.40
26	31.25	37.65
27	32.50	38.90
28	33.75	40.15
29	35.00	41.40
30	36.25	42.65

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A1253H-XXX-01-XD		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					CHKD.: Mark	LINEAR	ANGLES	DWG. NO.:			
3X						X.: ±0.30	X°: ±5.0°	TITLE :			
2X				APPD.: Billy	X.X: ±0.20	X.X°: ±3.0°	1.25mm Pitch Wafer Horizontal SMT Type		SHEET: 1/1		A4
1X	ORIGINAL	Judyyan			X.XX: ±0.15	X.XX°: ±2.0°	DATE: 21-Jul-2020		SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.10	X.XXX°: ±1.0°			UNIT: mm	THIRD ANGLE PROJECTION		