



RoHS Compliant

Specifications:

Material And Finish:

Insulator: PA9T UL94V-0

Contact: Copper alloy

Plated: See Ordering Information

Rating:

Current Rating: 2.0 Amp

Operating Temperature Range: $-40^{\circ}\sim+130^{\circ}\text{C}$

Electrical:



Insulator resistance: 100M ohm min.

According to the requirements of LV214





Ordering Information

A1270H-XXX-XX-X
1 2 3 4 5 6

- 1: — Series No.
2: — H: Horizontal SMT Type
3: — No. of Positions (02-10)
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
S: Matte Tin Plated
5: — 01: A Type
02: B Type
6: — A: In Bag
B: In Tube
G: In Tape & Reel

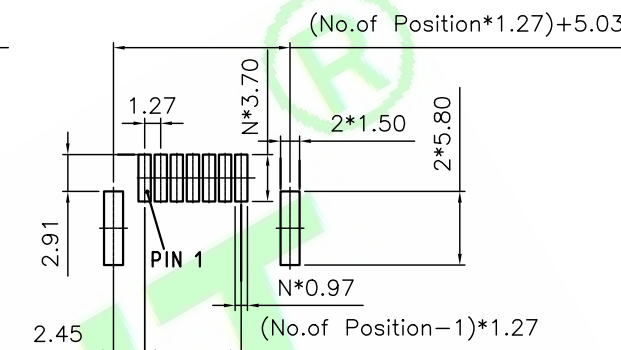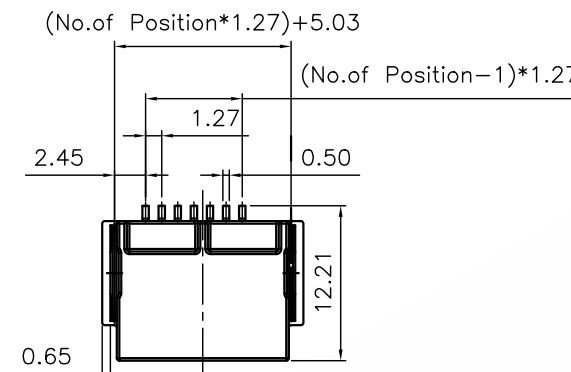

Recommended PCB Layout

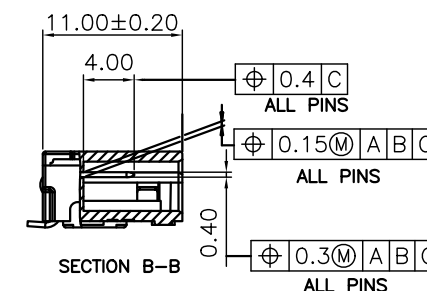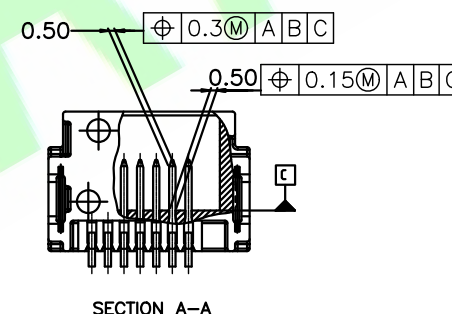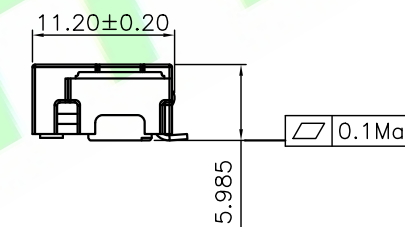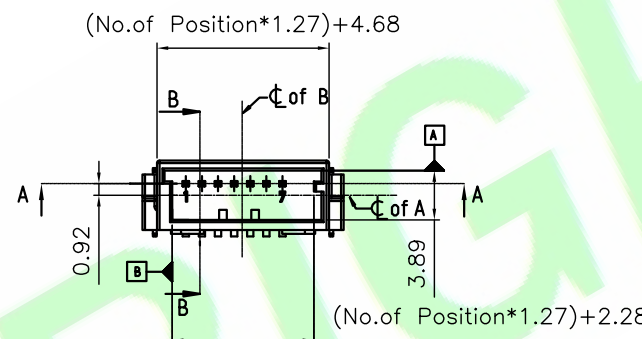

A Type Black



B Type Nature

DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : A1270H-XXX-XX-X	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Hu.CH	x.: ± 0.30	x': $\pm 5.0^{\circ}$	TITLE :	
	x.x: ± 0.20	x.x': $\pm 3.0^{\circ}$	1.27mm Pitch Wafer Horizontal SMT Type	
APPD.: Billy	x.xx: ± 0.15	x.xx': $\pm 2.0^{\circ}$	PICO MQS Series	
	x.xxx: ± 0.10	x.xxx': $\pm 1.0^{\circ}$	DATE: 5-Feb-2024	

HJBRIGHT

東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Zolin	
REV.	DESCRIPTION	DR.BY	ECN. NO