

Specifications:

Material And Finish:

Insulator:LCP/PA9T UL94V-0

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:4.0 Amp

Voltage Rating:350V AC/DC



Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

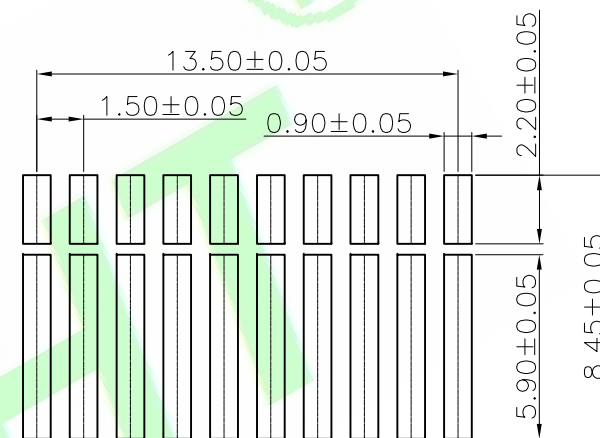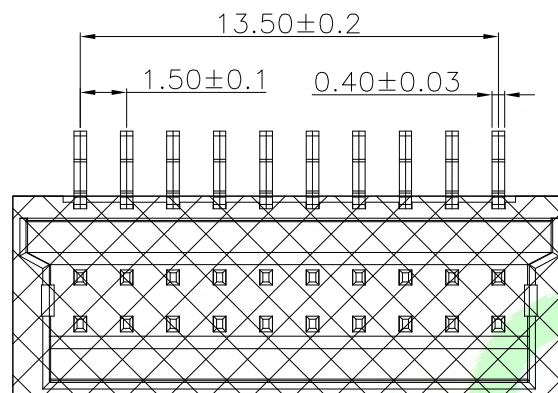

PCB Layout

Ordering Information

A15000M-20S-XX-M

1 2 3 4 5 6

1:— Series No.

2:— M:SMT Type

3:— No. of Positions



4:— S:Matte Tin Plated

5:— Color:

01:Natural

02:Black

6:— M:W/Mylar In Tape&Reel

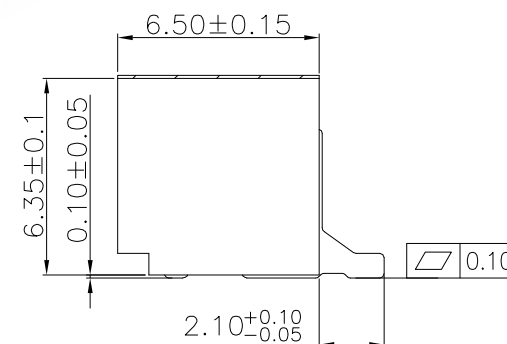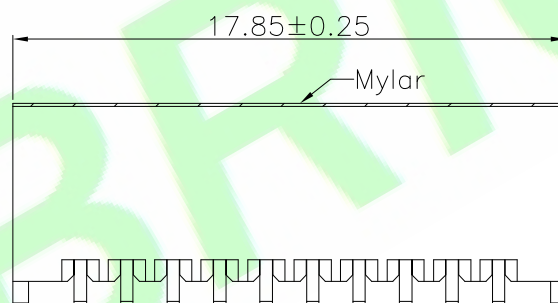

5X			
4X			
3X			
2X	Update code options	Judyyan	20220725
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY:	Mark
CHKD.:	Aaron
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±0.25
X.X: ±0.25	X.XX: ±0.15
X.XX: ±0.15	X.XXX: ±0.05
X.XX: ±3.0°	X.XXX: ±1.0°
X.XX: ±2.0°	

PART NO : A15000M-20Q-01-M
DWG. NO.:
TITLE : 1.50mm Pitch Wafer SMT Type
DATE: 28-Aug-2016

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4