

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:150V AC/DC


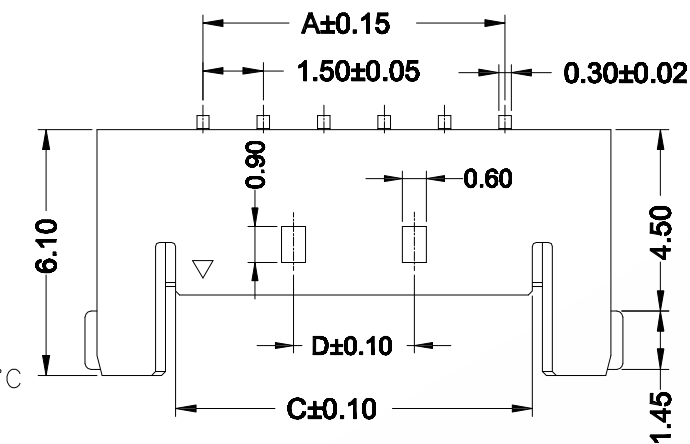
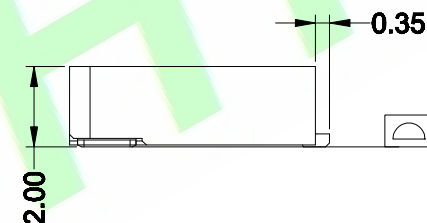
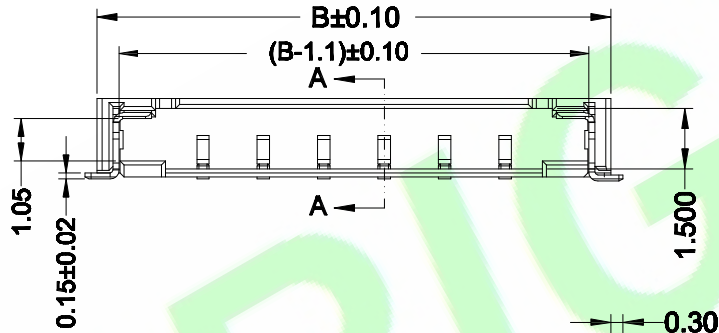
Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

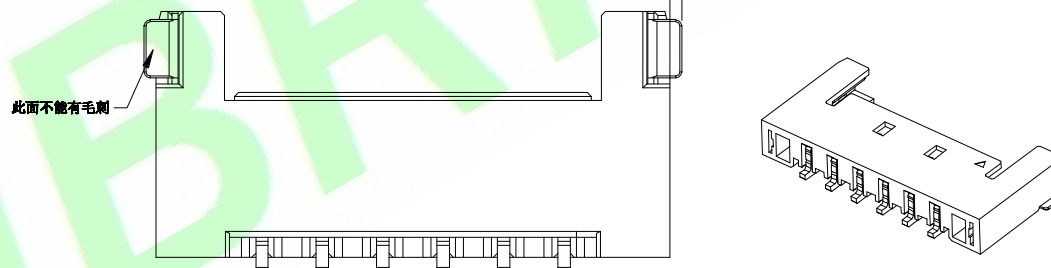
02P~04P Single Hole
Scale 1:0.7SECTION A-A
SCALE 1:1

Ordering Information

A1503H-XXX-01-X

1 2 3 4 5

- 1: — Series No.
 2: — H:Horizontal SMT Type
 3: — No. of Positions
 4: — A:Gold Flash
 H:Selective Gold Plated
 Q:Tin Plated
 5: — A:In bag
 B:In Tube
 C:In Tray
 D:In Tape&Reel



Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	6.75	2.85	
03	3.00	8.25	4.35	
04	4.50	9.75	5.85	
05	6.00	11.25	7.35	3.00
06	7.50	12.75	8.85	3.00
07	9.00	14.25	10.35	3.00
08	10.50	15.75	11.85	3.00
09	12.00	17.25	13.35	6.00
10	13.50	18.75	14.85	8.55
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

5X				DR.BY.: Samson	GENERAL TOLERANCE: LINEAR X.: ± 0.30 X.X: ± 0.20 X.XX: ± 0.15 X.XXX: ± 0.10	ANGLES X': $\pm 5.0^\circ$ X.X': $\pm 3.0^\circ$ X.XX': $\pm 2.0^\circ$ X.XXX': $\pm 1.0^\circ$	PART NO.: A1503H-XXX-01-X DWG. NO.: TITLE: 1.50mm Pitch Crimp Style Connectors	DATE: 05-Jun-2017
4X				CHKD.: Tony				
3X				APPD.: Billy				
2X								
1X	ORIGINAL	Samson						
REV.	DESCRIPTION	DR.BY.	ECN.	NO.				

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4