

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA9T Color:Black

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3 Amp/Pin

Voltage Rating:50V AC/DC

Operating Temperature

Range:-40°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

A18001H-04S-01-G

1 2 3 4 5









1:— Series No.

2:— H:Horizontal SMT Type

3:— No. of Positions

4:— S:Matte Tin Plated

5:— G:In Tape&Reel

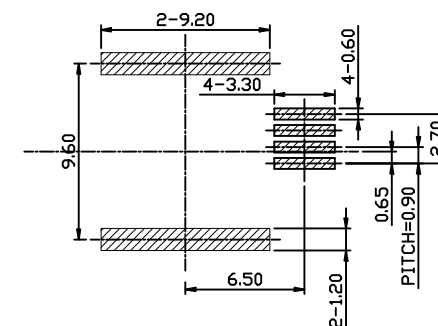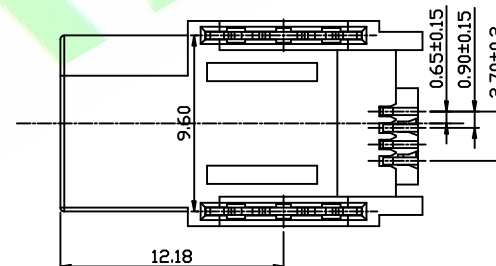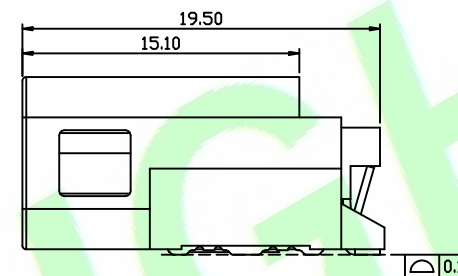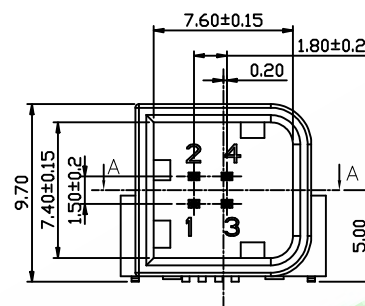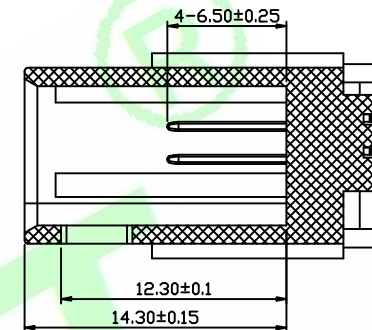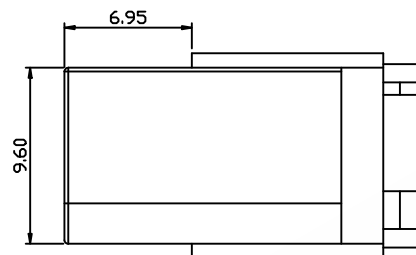

PCB LAYOUT (TOP VIEW)


Tolerance:±0.05mm

1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : A18001H-04S-01-G
	LINEAR	ANGLES	
CHKD.: Hu.CH	X.: ±0.40	X': ±5.0°	DWG. NO.:
	X.X: ±0.25	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 4PIN Double Row 1.5*1.8PITCH WAFER
	X.XXX: ±0.15	X.XXX': ±1.0°	
			DATE: 19-Jul-2024

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4