

Material And Finish:
Insulator:LCP UL94V-0 Color:BLACK
Contact:Copper Alloy
Plated:See Ordering Information


Rating:
Current Rating:3.0 Amp
Voltage Rating:50V AC/DC
Operating Temperature Range:-40°~+125°C


Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute

connector is USCAR conform

A18012H-20S-01-D

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— S:120~240u"Sn Over 40~100u" Ni
5:— D:In Tape&Reel

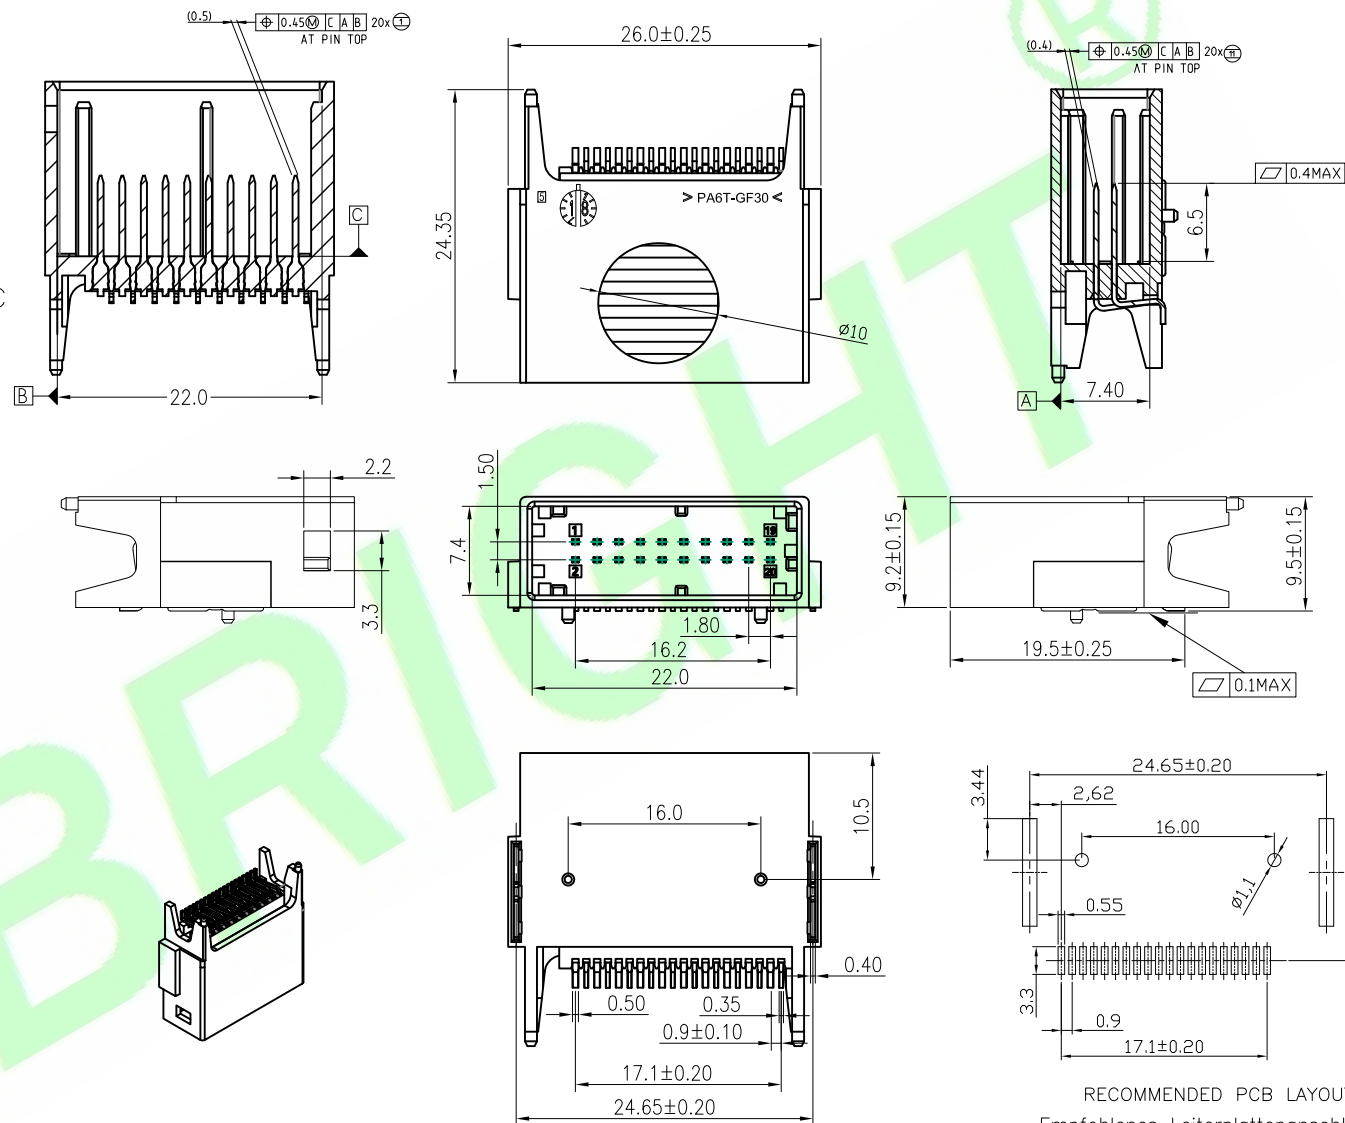

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A18012H-20S-01-D	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Mark	x.: ±0.30	x': ±5.0°	TITLE : 1.8x1.5mm Pitch Wafer Horizontal SMT Type	SHEET: 1/1		A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	Initial version	Judyyan		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		DATE: 06-Jul-2022		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°			THIRD ANGLE PROJECTION	