

Specifications:

Material And Finish:

Insulator:PA 66 UL94V-0 Color:Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3Amp (22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Ordering Information

A20012S-XXX-XX-XXX

1 2 3 4 5 6 7 8

1:— Series No.

2:— S: Straight Type

3:— No. of Positions

4:— A: Gold Flash

Q: Tin Plated

5:— 01: W/0 Peg

02: With Peg

6:— N: Natural

B: Black







R: Red

7:— DIP size

A: D=3.10mm

B: D=2.60mm

8:— C: In Tray

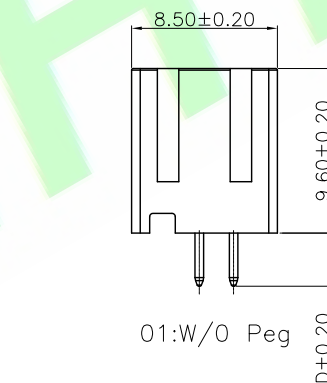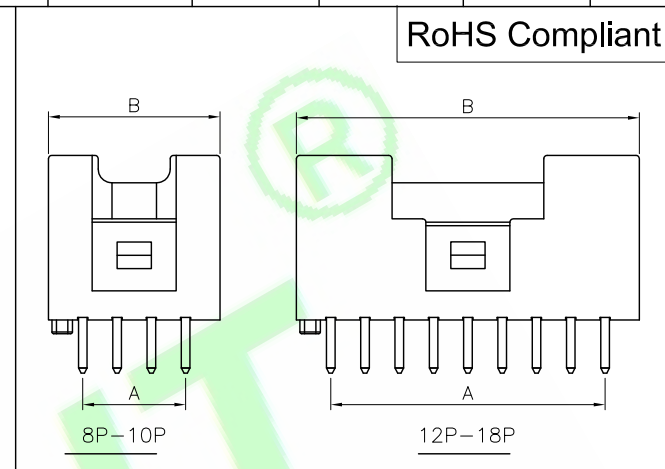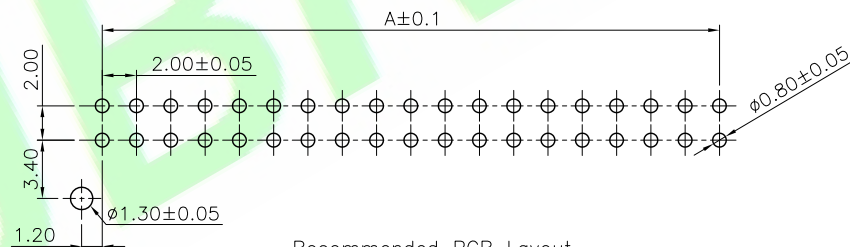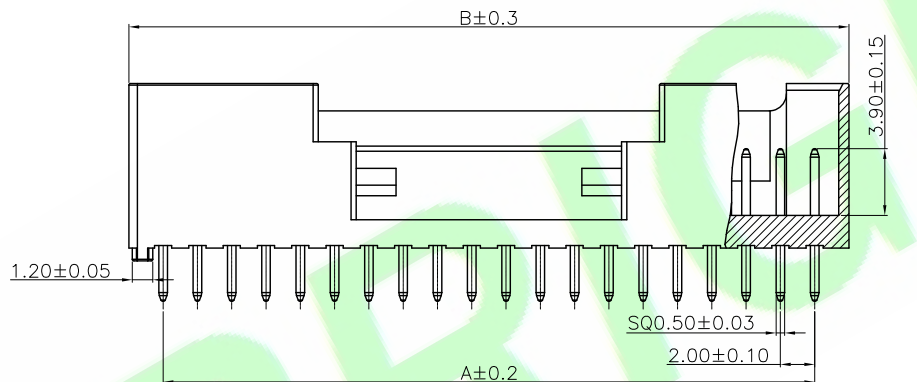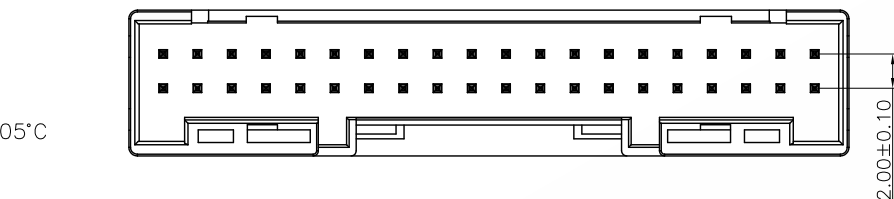

Circuits	Dimension mm	
	A	B
8	6.0	10.0
10	8.0	12.0
12	10.0	14.0
14	12.0	16.0
16	14.0	18.0
18	16.0	20.0
20	18.0	22.0
22	20.0	24.0
24	22.0	26.0
26	24.0	28.0
28	26.0	30.0
30	28.0	32.0
32	30.0	34.0
34	32.0	36.0
36	34.0	38.0
38	36.0	40.0
40	38.0	42.0

5X				DR.BY.:	
4X				Mark	
3X	Update code options	Judyyan	2022-08-19	CHKD.:	
2X	Add color options	Mark	2021-11-28	Tony	
1X	ORIGINAL	Mark		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A20012S-XXX-XX-XXX
DWG. NO.:
TITLE : 2.0mm Pitch Wafer Straight Type
DATE: 08-Nov-2021

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITE	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	
A4	