

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0Amp(22AWG)

Voltage Rating:250V AC/DC


Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.


Withstanding Voltage:1000V AC/Minute

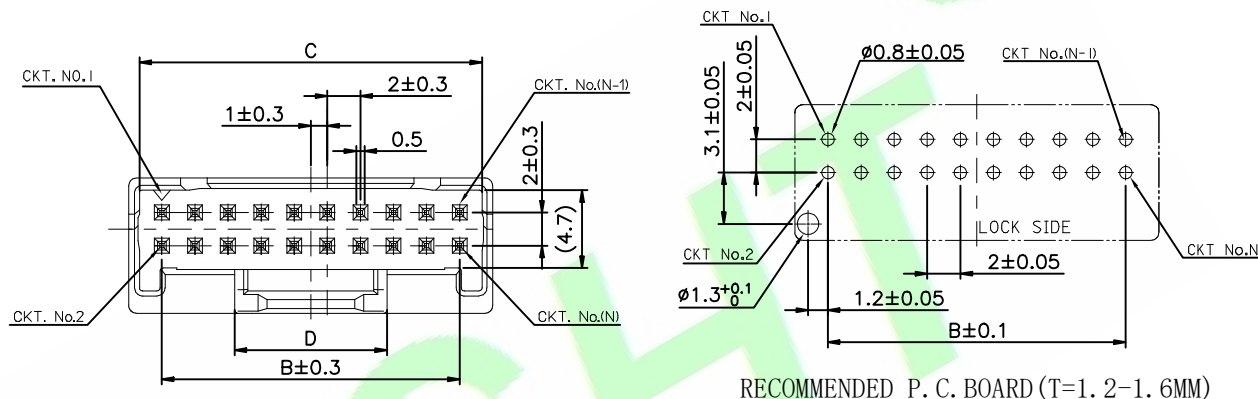

Ordering Information

A20022S-XXS-01-X

- 1: Series No.
2: S: Straight type
3: No. of Positions
4: S: Matte Tin Plated
5: A: In bag
B: In Tube
C: In Tray

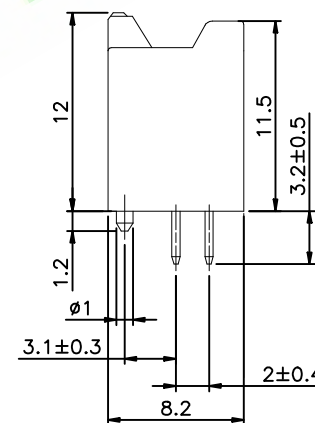

D	C	B	A	CKT.
9.2	40.7	38	42	40
9.2	38.7	36	40	38
9.2	36.7	34	38	36
9.2	34.7	32	36	34
9.2	32.7	30	34	32
9.2	30.7	28	32	30
9.2	28.7	26	30	28
9.2	26.7	24	28	26
9.2	24.7	22	26	24
9.2	22.7	20	24	22
9.2	20.7	18	22	20
9.2	18.7	16	20	18
9.2	16.7	14	18	16
9.2	14.7	12	16	14
9.2	12.7	10	14	12
7.3	10.7	8	12	10

				DR.BY.: Aaron	GENERAL TOLERANCE: 0.00~0.25: ±0.03 0.25~0.50: ±0.05 0.50~1.00: ±0.10 1.00~10.0: ±0.20 10.0~30.0: ±0.25 30.0~ : ±0.30	PART NO : A20022S-XXS-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
				CHKD.: Tony		DWG. NO.:			
2X	Update the rated current	Judyyan	20240605	APPD.: Billy		TITLE : IGRID 2.0MM W/B DUAL DIP PLUG ASSY ST (With BOSS) (RoHS)	SHEET: 1/1		A4
1X	ORIGINAL	Aaron				DATE: 27-May-2019	SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.			UNIT: mm	THIRD ANGLE PROJECTION		