

Specifications:

Material And Finish:

Insulator:High temperature themoplastic

Contact:Brass

Plated:See Ordering Information

Rating:

Current—Maximum per contact:4.0 Amp(22AWG)

Voltage—Maximum 500V DC













Operating Temperature Range:−40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

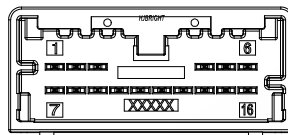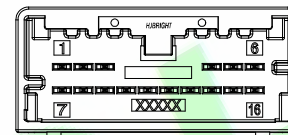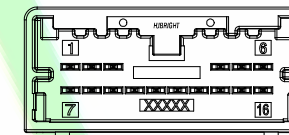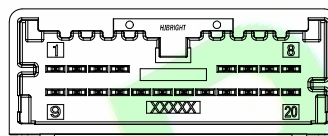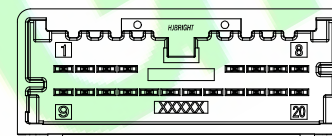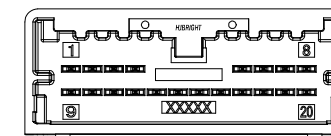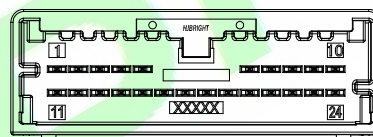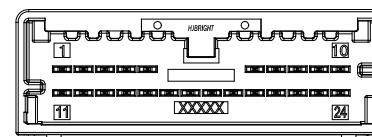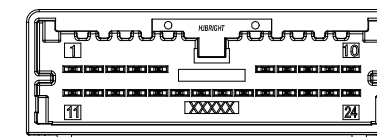12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:BLACK12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY12 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:DARK BLACK16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY16 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:DARK BLACK20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY20 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE COLOR:DARK BLACK24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE COLOR:GRAY24 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE COLOR:DARK GRAY

Ordering Information

A20062S-XXS-XC

1 2 3 4 5 6

1:—Series No.

2:—S:Straight Type

3:—No. of Positions

4:—S: Matte Tin Plated

5:—Polarization OPTION:

A: A TYPE Color:Balck












B: B TYPE Color:Gray

C: C TYPE Color:Drak Gray

6:—A:In bag

C:In Tray

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A20062S-XXS-XC		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
4X						LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0°	TITLE : MINI50 STRAIGHT DUAL ROW ASSEMBLY SALES DRAWING(12~24P)	SHEET: 1/3					A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1					
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.05	x.xxx': ±1.0°	DATE: 24-Jun-2019						

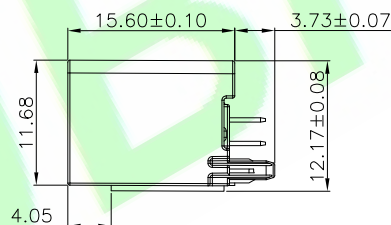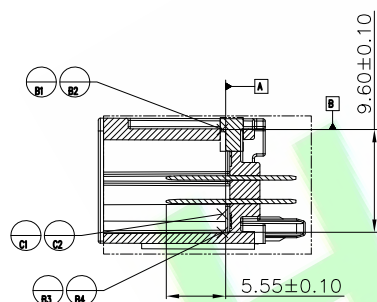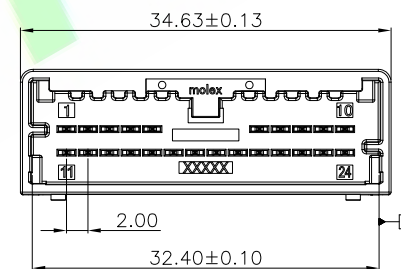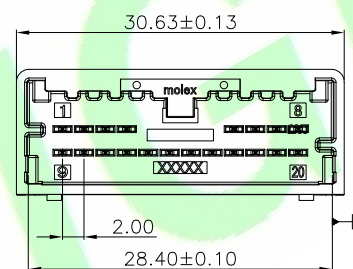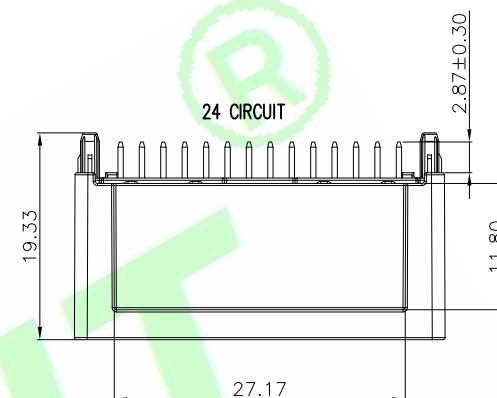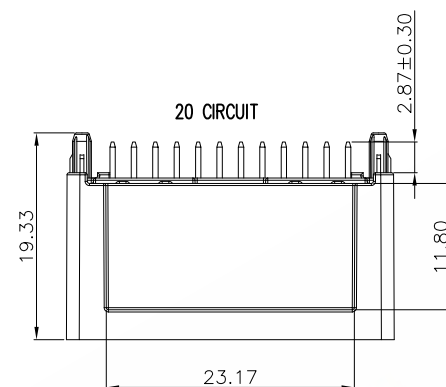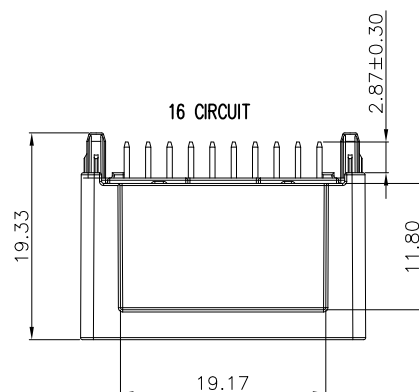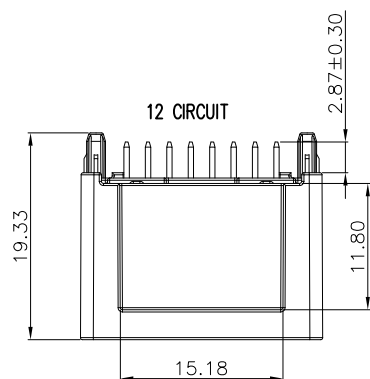







5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan
CHKD:	Aren
APPD:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.05	X.XXX': ±1.0°

PART NO : A20062S-XXS-XC
DWG. NO.:
TITLE : MINI50 STRAIGHT DUAL ROW ASSEMBLY SALES DRAWING(12~24P)
DATE: 24-Jun-2019

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 2/3		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		

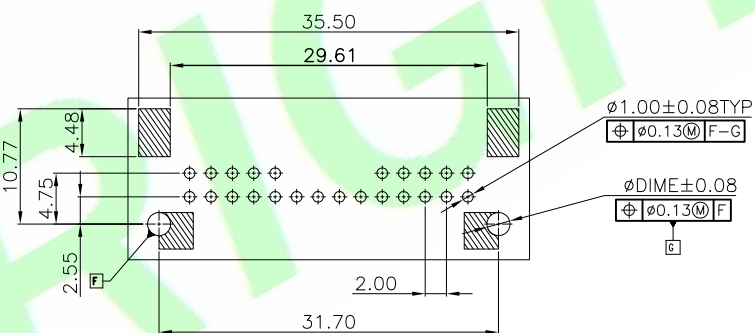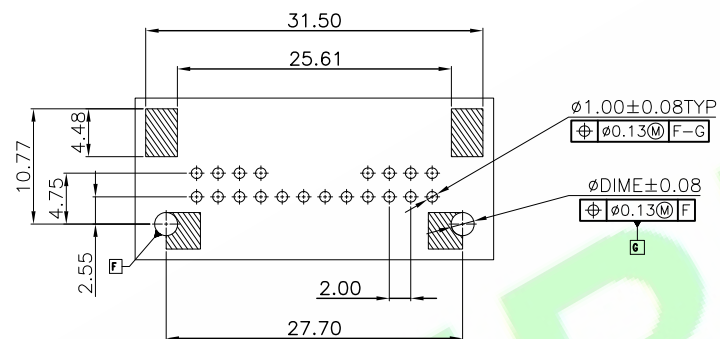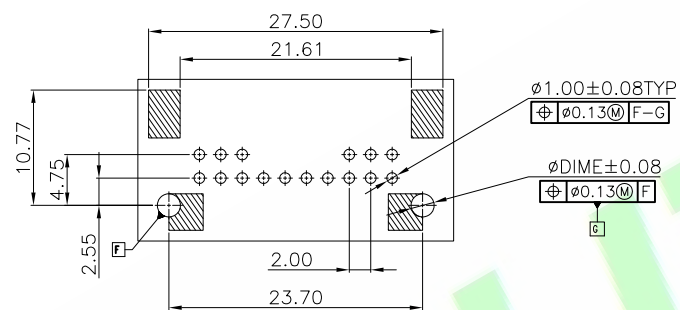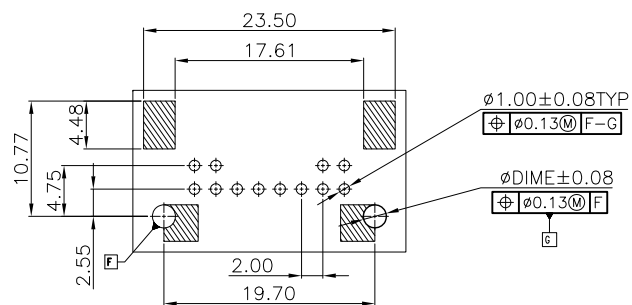

POST HOLE TABLE

	DW E
PRESS FIT	2.15
DROP IN	2.55

PCB LAYOUT
BOARD SHOWN FOR REFERENCE ONLY

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A20062S-XXS-XC		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR ANGLES		DWG. NO.:					
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0°	TITLE : MINI50 STRAIGHT DUAL ROW ASSEMBLY SALES DRAWING(12~24P)		SHEET: 3/3			A4
2X					x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.10	x.xx': ±2.0°	DATE: 24-Jun-2019		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.05	x.xxx': ±1.0°						