

Specifications:

Material And Finish:

Insulator:LCP/PA6T/PA9T UL94V-0

Color:Natural,Black

Contact:Brass

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.






Withstanding Voltage:1000V AC/Minute

Ordering Information

A2007H-XXQ-01-XXX

1 2 3 4 5 6 7

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— Q:Tin Plated
5:— C:LCP
N:PA6T
G:PA9T
6:— N:Natural
B:Black
7:— B:In Tube
D:In Tape&Reel

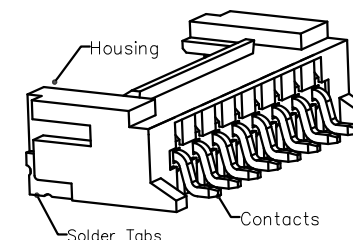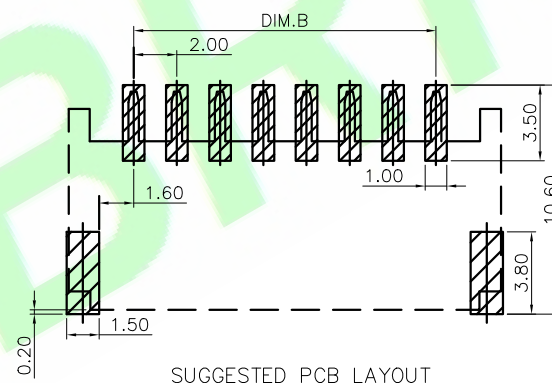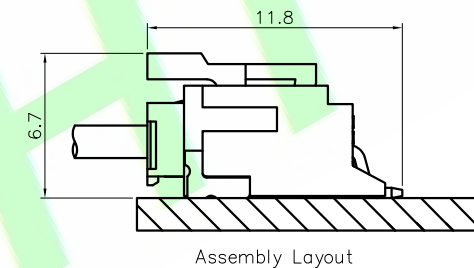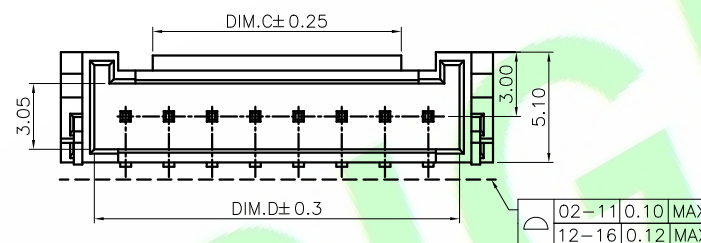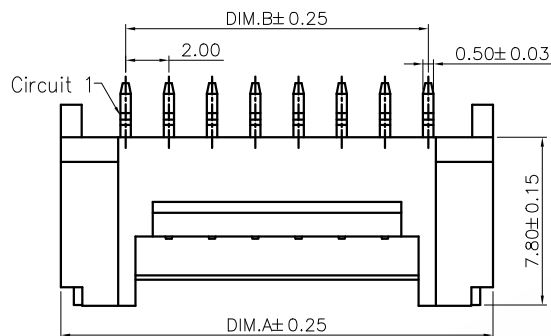


Circuits	Dimensions (mm)			
	DIM. A	DIM. B	DIM. C	DIM. D
02	8.00	2.00	2.70	4.75
03	10.00	4.00	3.20	6.75
04	12.00	6.00	3.50	8.90
05	14.00	8.00	5.50	10.90
06	16.00	10.00	7.50	12.90
07	18.00	12.00	9.50	14.90
08	20.00	14.00	11.50	16.90
09	22.00	16.00	13.50	18.90
10	24.00	18.00	15.50	20.90
11	26.00	20.00	15.50	22.90
12	28.00	22.00	15.50	24.90
13	30.00	24.00	15.50	26.90
14	32.00	26.00	15.50	28.90
15	34.00	28.00	15.50	30.90
16	36.00	30.00	15.50	32.90

DR.BY.: Annie	GENERAL TOLERANCE:		PART NO : A2007H-XXQ-01-XX
	LINEAR	ANGLES	
CHKD.: Judyyan	x.: ±0.50	x: ±5.0°	DWG. NO.:
	x.x: ±0.30	x.x: ±2.0°	
APPD.: Billy	x.xx: ±0.20	x.xx: ±1.0°	TITLE : 2.0mm Pitch Type SMT 90° Wafer
	x.xxx: ±0.10	x.xxx:	
		DATE: 26-Nov-2024	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Annie	
REV.	DESCRIPTION	DR.BY	ECN. NO