

RoHS Compliant

Specifications:

Material And Finish:

Insulator: PA6T UL94V-0

Contact: Copper alloy

Plated: See Ordering Information

Rating:

Current Rating: 3.0 Amp(Power)

Voltage Rating: 125V AC/DC

Operating Temperature Range: -55°~+105°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1000V AC/Minute

Ordering Information

A20200R-XXX-01-C
1 2 3 4 5

1: Series No.

2: R:R/A Type

3: No. of Positions

4: A: Gold Flash

H: Selective Gold Flash

S: Matte Tin Plated

T: 10u" Gold on contact; Tin on tail



M: 15u" Gold on contact; Tin on tail

Q: Tin Plated

5: A: In Bag

B: In Tube


C: In Tray

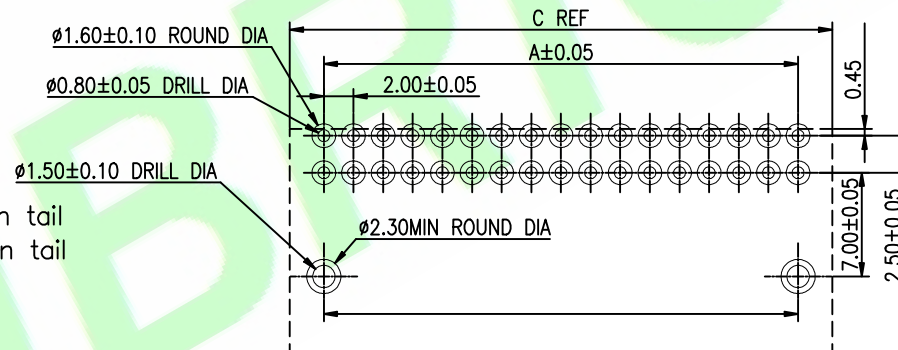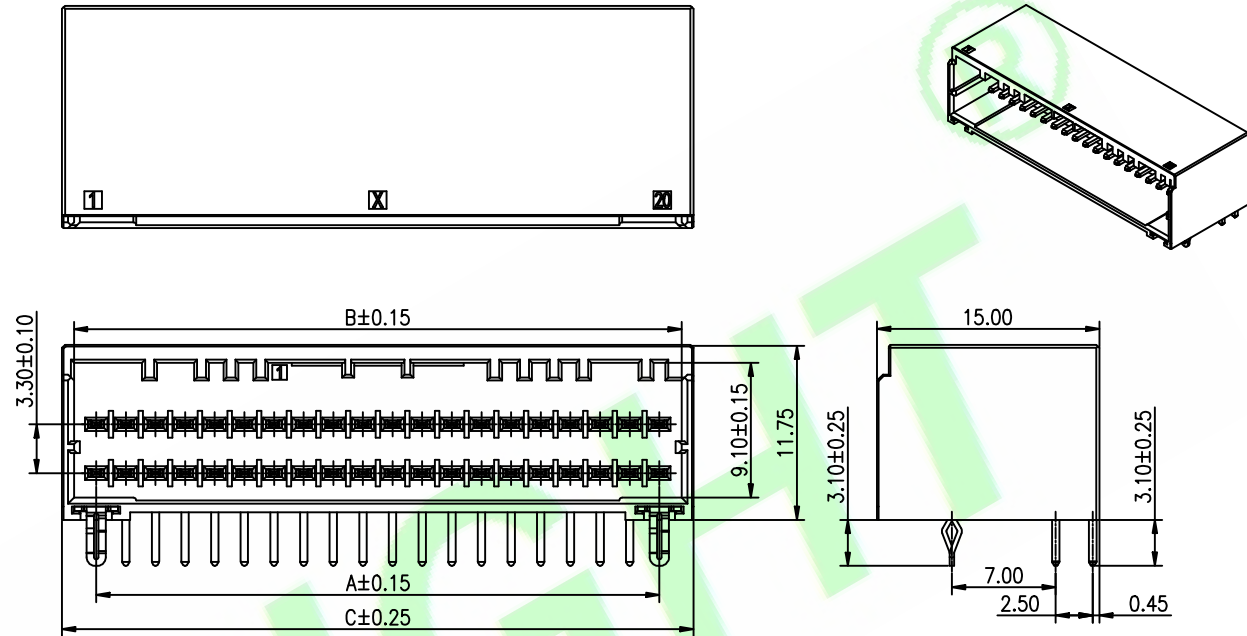


Circuit No.	Dimensions		
	A	B	C
10P	8.00	11.00	12.60
18P	16.00	19.00	20.60
20P	18.00	21.00	22.60
22P	20.00	23.00	24.60
24P	22.00	25.00	26.60
26P	24.00	27.00	28.60
28P	26.00	29.00	30.60
30P	28.00	31.00	32.60
32P	30.00	33.00	34.60
34P	32.00	35.00	36.60
40P	38.00	41.00	42.60

5X				DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : A20200R-XXX-01-C		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	X.: ±0.40	X': ±5.0°	TITLE : 2.00mm Pitch Wafer		SHEET: 1/2			A4
2X					X.X: ±0.30	X.X': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Aren		APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°	DATE:		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°						


A4

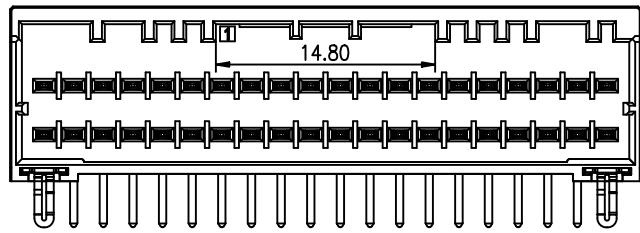


40P

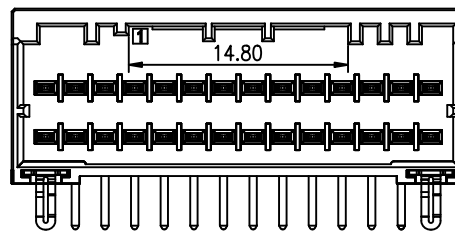


28P

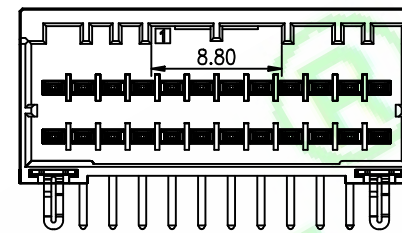


24P

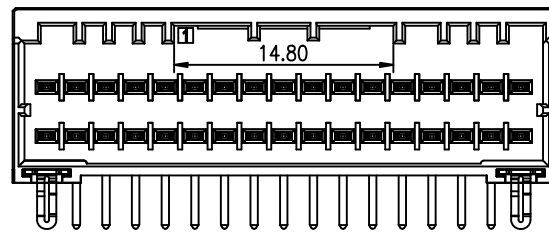


34P

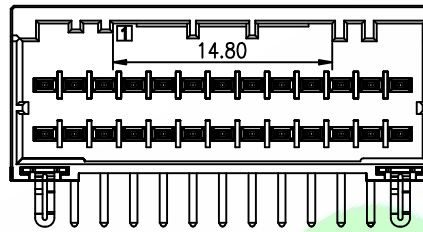


26P




20P

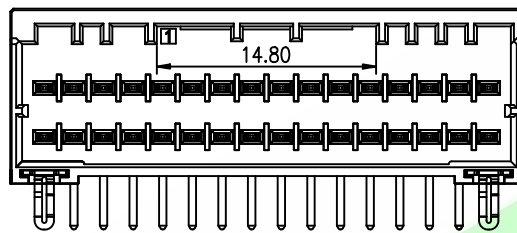


32P

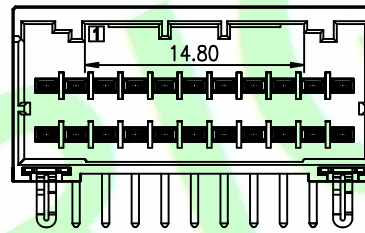


22P



18P

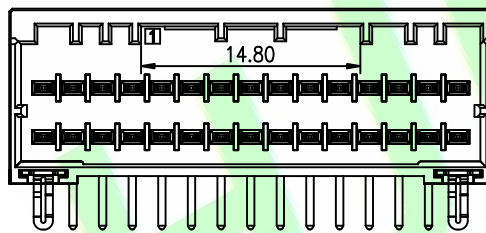

30P



10P

5X				DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : A20200R-XXX-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Aren	x.: ±0.40	x': ±5.0°	TITLE : 2.00mm Pitch Wafer		SHEET: 2/2		A4
2X					x.x: ±0.30	x.x': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Aren		APPD.:	x.xx: ±0.20	x.xx': ±2.0°			UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE:				