

RoHS Compliant

Specifications:

Material And Finish:

Insulator:High temperature themoplastic

Contact:Brass

Plated:See Ordering Information

Rating:

Current—Maximum per contact:4.0 Amp

Voltage—Maximum 500V DC


Operating Temperature Range:−40°~+105°C

Electrical:


Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.


Withstanding Voltage:1000V AC/Minute




4 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A



4 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B



4 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C



4 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION D

Ordering Information

A2062R-XXS-XX

1 2 3 4 5 6

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — S: Matte Tin Plated

5: — Polarization OPTION:

A: A TYPE Color:Balck

B: B TYPE Color:Gray


C: C TYPE Color:Drak Gray

D: D TYPE Color:GREEN


6: — A:In Tube

C:In Tray


G:W/O Cap In Tape&Reel

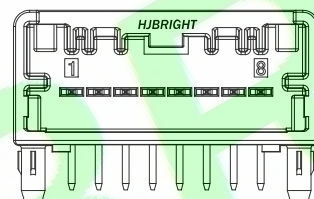


8 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A

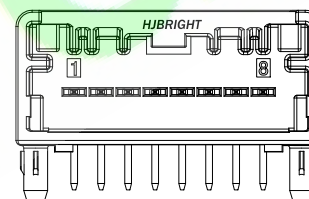



8 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B

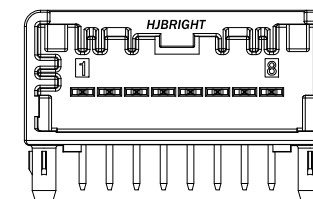




8 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C

5X				DR.BY.: Yuki	GENERAL TOLERANCE:		PART NO : A2062R-XXS-XX	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
4X						LINEAR					ANGLES	DWG. NO.:	
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0°	TITLE : MINI50 R/A Type Single Row ASSEMBLY SALES DRAWING				SHEET: 1/3		
2X					x.x: ±0.20	x.x': ±3.0°					SCALE: 1:1		
1X	ORIGINAL	Yuki		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm	THIRD ANGLE PROJECTION				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 9-Aug-2023						


RoHS Compliant

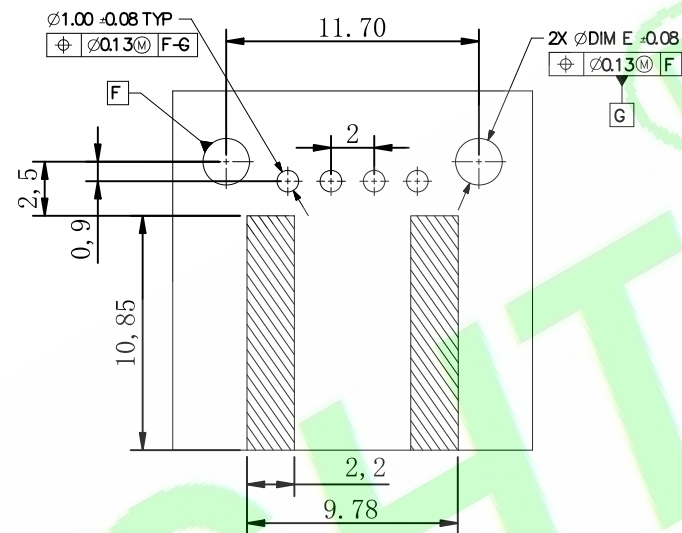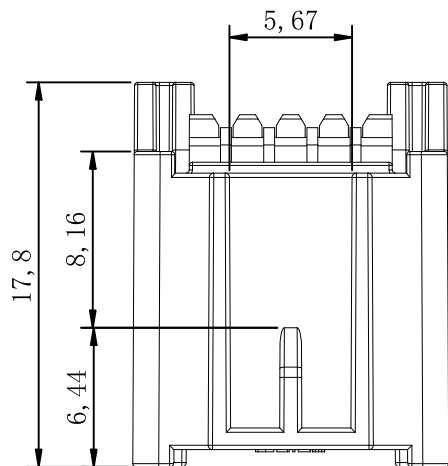



PCB LAYOUT

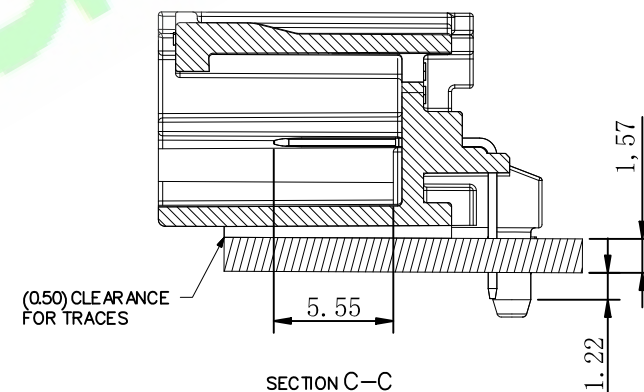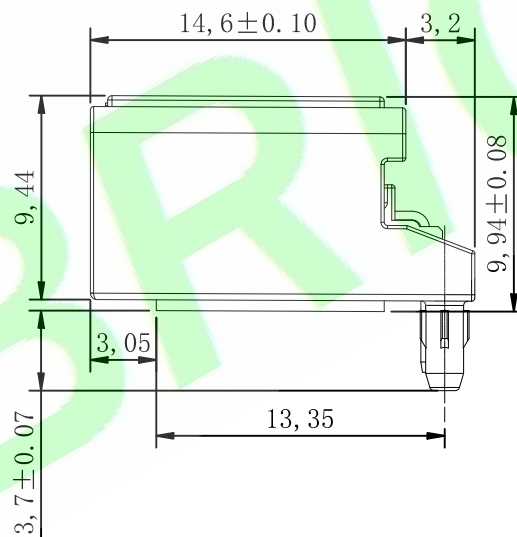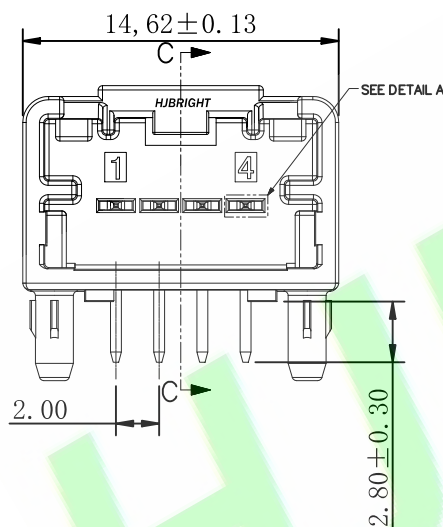




SECTION C-C


5X				DR.BY.: Yuki	GENERAL TOLERANCE:		PART NO : A2062R-XXS-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0°	TITLE : MINI50 R/A Type Single Row ASSEMBLY SALES DRAWING	SHEET: 2/3			A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Yuki		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 9-Aug-2023	THIRD ANGLE PROJECTION			

RoHS Compliant

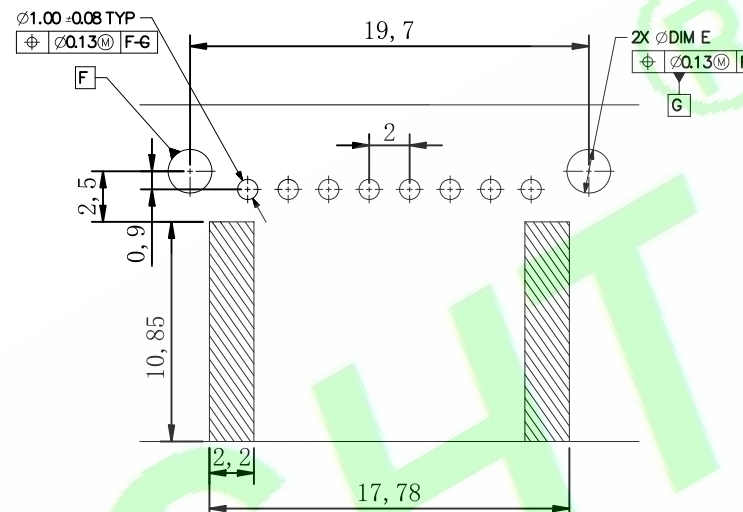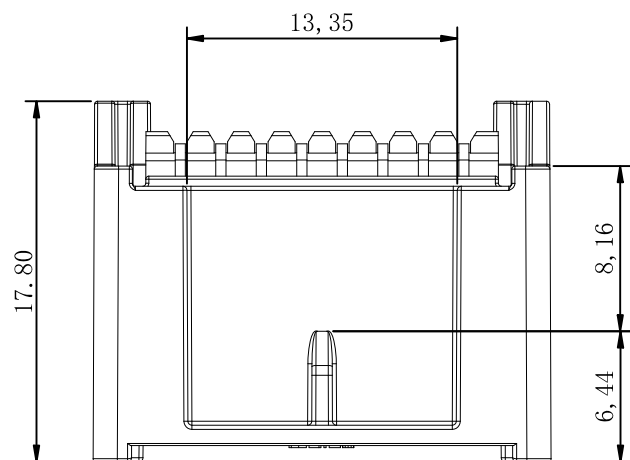

PCB LAYOUT

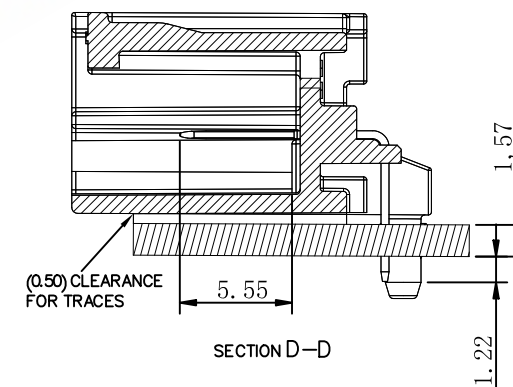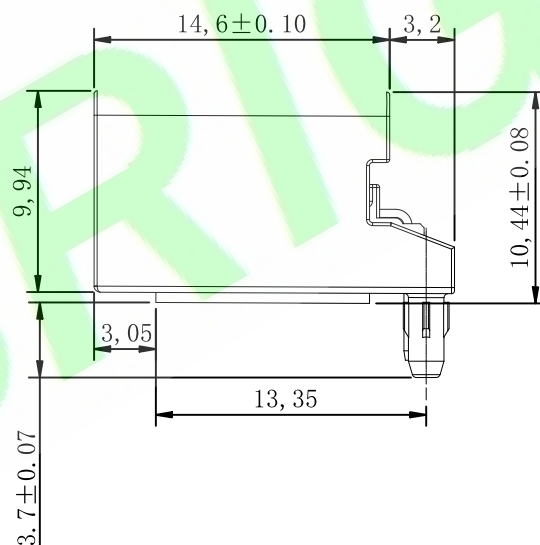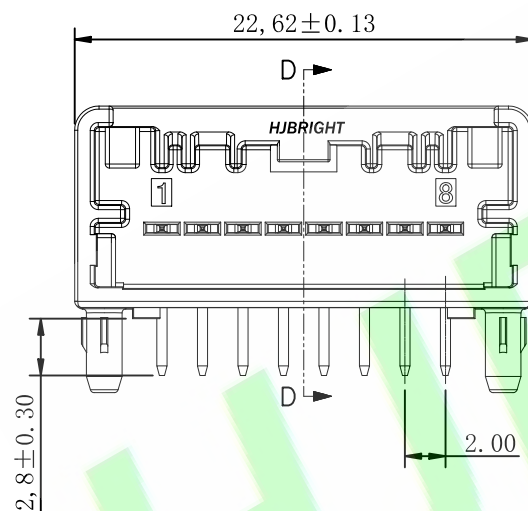

5X				DR.BY.: Yuki	GENERAL TOLERANCE:		PART NO : A2062R-XXS-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Aren	x.: ±0.30	x°: ±5.0°	TITLE : MINI50 R/A Type Single Row ASSEMBLY SALES DRAWING	SHEET: 3/3		A4	
2X					x.x: ±0.20	x.x°: ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Yuki		APPD.:	x.xx: ±0.15	x.xx°: ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 9-Aug-2023	THIRD ANGLE PROJECTION			