

Specifications:**Material And Finish:**

Insulator:High temperature themoplastic

Contact:Brass

Plated:See Ordering Information

Rating:

Current—Maximum per contact:4.0 Amp

Voltage—Maximum 500V DC

Operating Temperature Range:−40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information**A2062S-XXS-XX**

1 2 3 4 5 6

1:—Series No.

2:—S: Straight Type

3:—No. of Positions

4:—S: Matte Tin Plated

5:—Polarization OPTION:

A: A TYPE Color:Balck







B: B TYPE Color:Gray

C: C TYPE Color:Drak Gray









D: D TYPE Color:GREEN

6:—A:In bag


C:In Tray

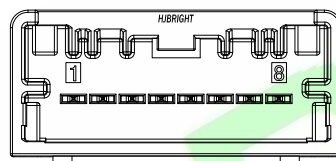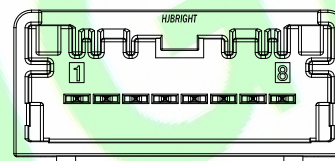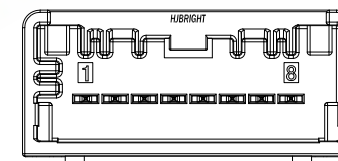4 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE
COLOR:BLACK4 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE
COLOR:GRAY4 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE
COLOR:DARK GRA4 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION D TYPE
COLOR:GREEN8 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION A TYPE
COLOR:BLACK8 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION B TYPE
COLOR:GRAY8 CIRCUIT RIGHT ANGLE HEADER
POLARIZATION OPTION C TYPE
COLOR:DARK GRA

5X				DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : A2062S-XXS-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:			
3X				APPD.: Billy		x.: ±0.30	x°: ±5.0°	TITLE : MINI50 STRAIGHT Single Row ASSEMBLY SALES DRAWING			
2X					x.x: ±0.20	x.x°: ±3.0°					
1X	ORIGINAL	Aren			x.xx: ±0.15	x.xx°: ±2.0°	DATE: 24-Jun-2022		SHEET: 1/3		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.05	x.xxx°: ±1.0°			SCALE: 1:2		
									UNIT: mm	THIRD ANGLE PROJECTION	

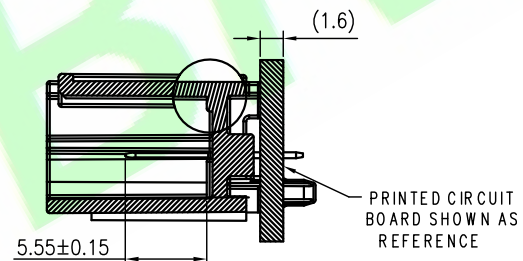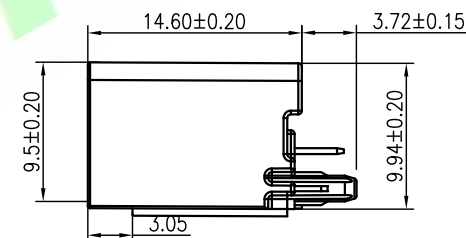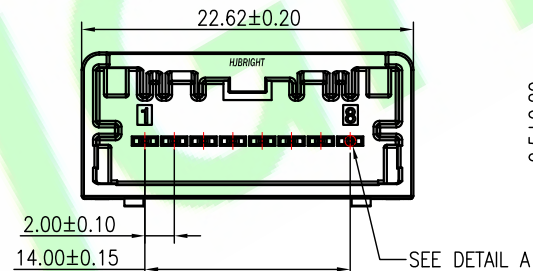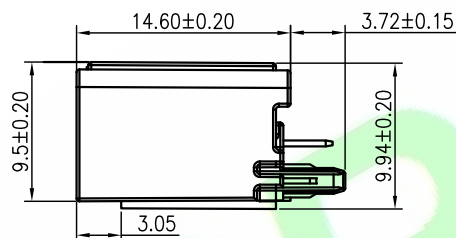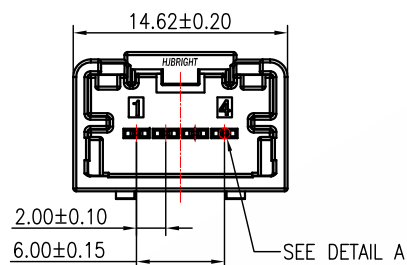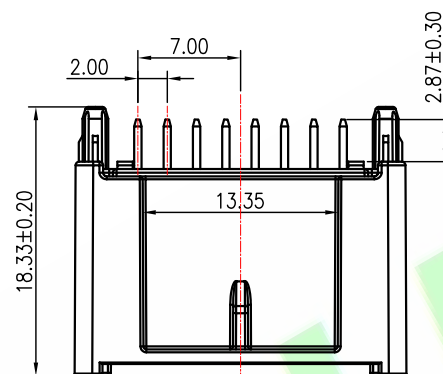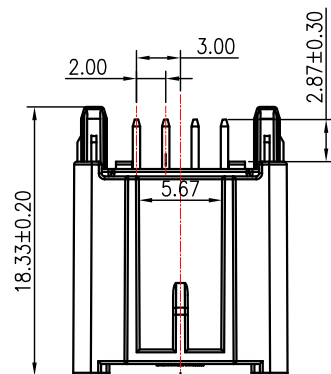


5X				DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : A2062S-XXS-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0°	TITLE : MINI50 STRAIGHT Single Row ASSEMBLY SALES DRAWING	SHEET: 2/3		A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:2		
1X	ORIGINAL	Aren		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.05	x.xxx': ±1.0°	DATE: 24-Jun-2023	THIRD ANGLE PROJECTION		

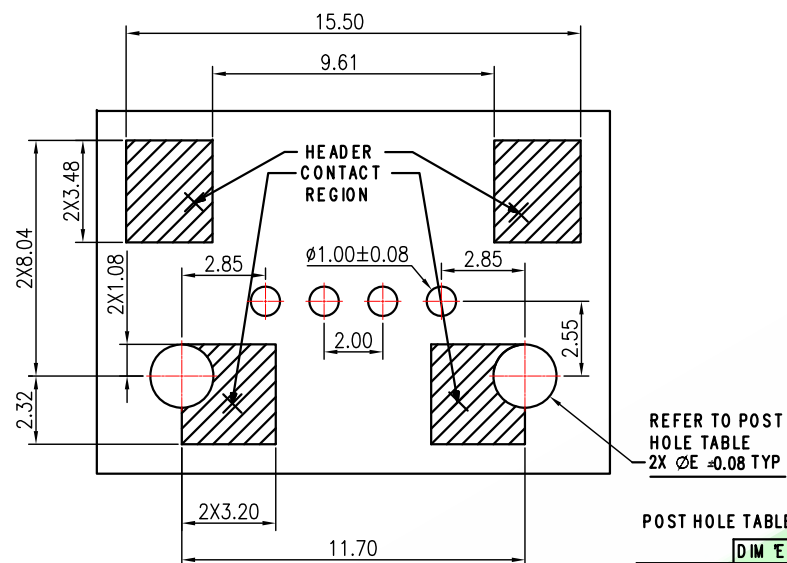

POST HOLE TABLE	
	DIM E'
PRESS FIT	2.15
DROP IN	2.55

4P

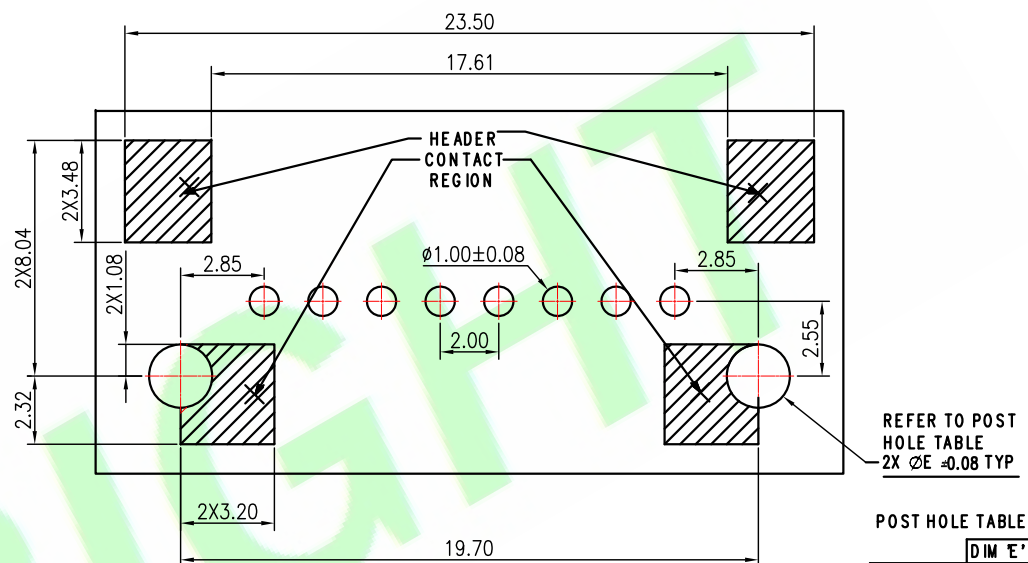

POST HOLE TABLE	
	DIM E'
PRESS FIT	2.15
DROP IN	2.55

8P

PCB LAYOUT
BOARD SHOWN FOR REFERENCE ONLY

5X				DR.BY.: Aren	GENERAL TOLERANCE:		PART NO : A2062S-XXS-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
4X					CHKD.: Aren	LINEAR	ANGLES				DWG. NO.:		
3X				APPD.: Billy		x.: ±0.30	x°: ±5.0°				TITLE : MINI50 STRAIGHT Single Row ASSEMBLY SALES DRAWING	SHEET: 3/3	
2X					x.x: ±0.20	x.x°: ±3.0°	SCALE: 1:4						
1X	ORIGINAL	Aren		x.xx: ±0.15	x.xx°: ±2.0°	UNIT: mm							
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.05	x.xxx°: ±1.0°	DATE: 24-Jun-2023	THIRD ANGLE PROJECTION					