
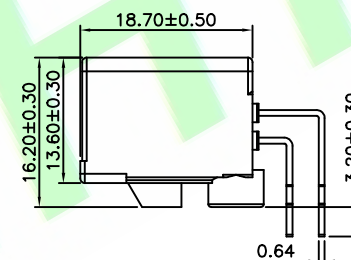
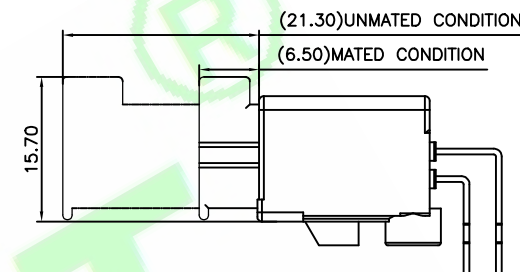
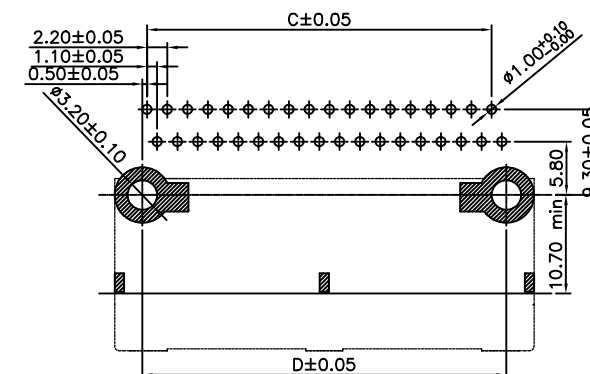


Withstanding Voltage: 250V AC/Minute


$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{6}$$

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— S: Matte Tin Plated
5:— C: In Tray

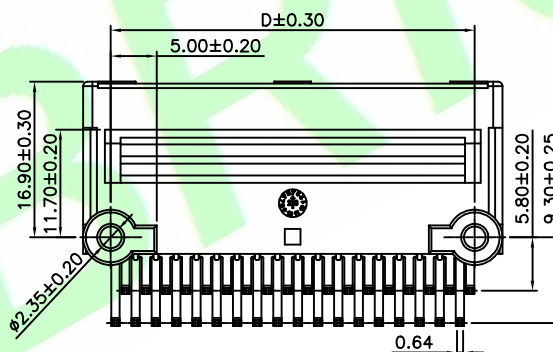


Recommended PCB Layout
(Tolerance:0.05mm)

DR.BY.: kang	GENERAL TOLERANCE:		PART NO : A22001R-XXS-01-C
	LINEAR	ANGLES	
CHKD.: kang	x.: ±0.0*	x': ±5.0°	DWG. NO.:
	x.x: ±0.25	x.x': ±3.0°	TITLE :
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	2.20mm Pitch Wafer Double Row R/A Type
	x.xxx: ±0.05	x.xxx': ±1.0°	DATE: 13-Sep-2023


HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2		
SCALE: 1:1		
UNIT: mm		


1X	ORIGINAL	kang	
REV.	DESCRIPTION	DR.BY	ECN. NO




12P




16P




20P




24P




28P

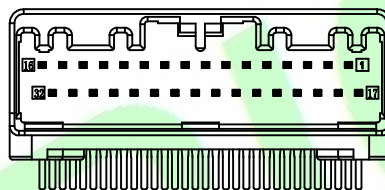

32P

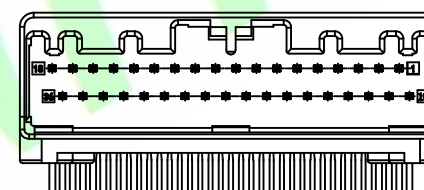

36P

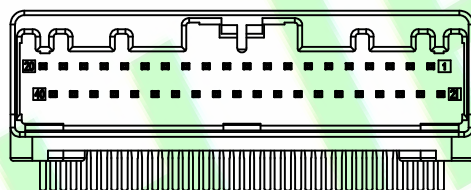


40P

Pin	Dimension			
	A	B	C	D
12P	19.10	16.70	11.00	13.10
16P	23.50	21.10	15.40	17.50
20P	27.90	25.50	19.80	21.90
24P	32.30	29.90	24.20	26.30
28P	36.70	34.30	28.60	30.70
32P	41.10	38.70	33.00	35.10
36P	45.50	43.10	37.40	39.50
40P	49.90	47.50	41.80	43.90

DR.BY.: kang	GENERAL TOLERANCE:		PART NO : A22001R-XXS-01-C
	LINEAR	ANGLES	
CHKD.: kang	x.: x.x: ±0.25	x': ±5.0° x.x': ±3.0°	DWG. NO.:
	x.xx: ±0.15	x.xx': ±2.0°	TITLE : 2.20mm Pitch Wafer Double Row R/A Type
APPD.: Billy	x.xxx: ±0.05	x.xxx': ±1.0°	
			DATE: 13-Sep-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	kang	ECN. NO.
REV.	DESCRIPTION	DR.BY	