

Specifications:

Material And Finish:

Insulator:PPS UL94V-0

Contact:Copper alloy

Rating:

Current Rating:3.0 Amp

Voltage Rating:50V AC/DC



Operating Temperature Range:-40°~+85°C

Electrical:


Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

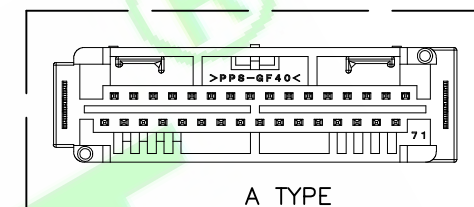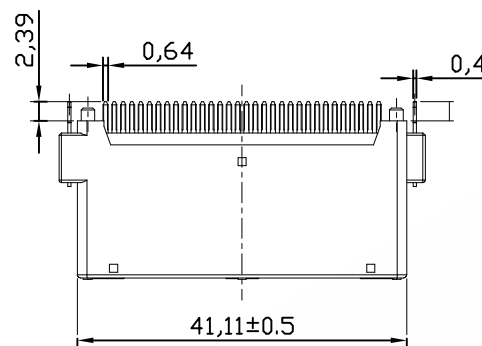

A TYPE



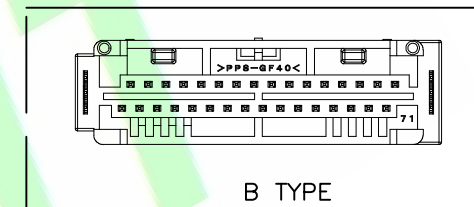


B TYPE

Ordering Information


A22001S-32Q-02-XXX
1 2 3 4 5 6 7

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — Q: Tin Plated
5: — A: A Type
B: B Type
6: — N: Natural
B: Black
BL: Blue
GR: Gray
7: — A: In Bag
C: In Tray

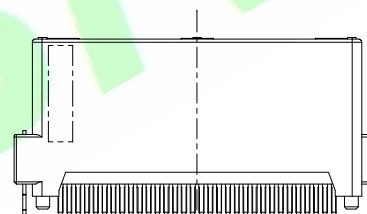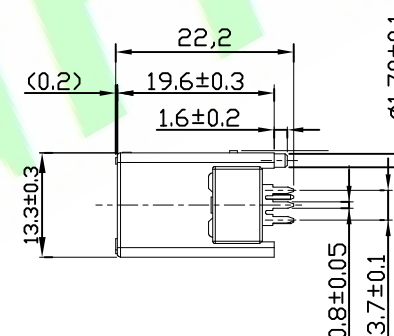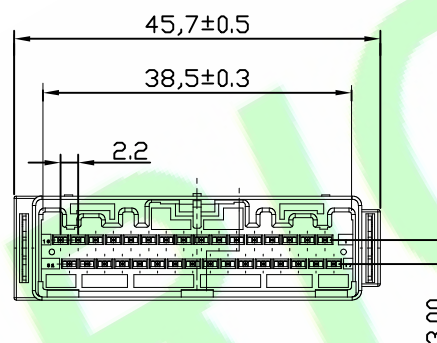

2X	Update code options	Judyyan	20231129
1X	ORIGINAL	Samson	
REV	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A22001S-32Q-02-XXX
	LINEAR	ANGLES	
CHKD.: Tony	X.:	X°: ±5.0°	DWG. NO.:
	X.X: ±0.30	X.X°: ±3.0°	
APPD.: Billy	X.XX: ±0.20	X.XX°: ±2.0°	TITLE : 2.2 mm Pitch wafer Connector
	X.XXX: ±0.10	X.XXX°: ±1.0°	
			DATE: 10-Oct-2017

HJBRIGHT ® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	
SCALE: 1:1	
UNIT: mm	
THIRD ANGLE PROJECTION	

A4

A4