




Specifications:
Material And Finish:
Insulator:PBT UL94V-0 Color:Natural
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:3.0 Amp
Operating Temperature Range:-40°C~+125°C



Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
A22011R-20Q-01-C
1 2 3 4 5

1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Tin Plated
5: — C: In Tray

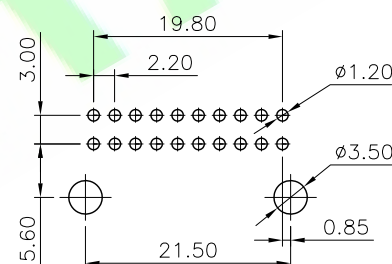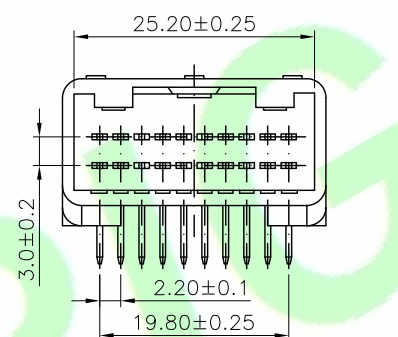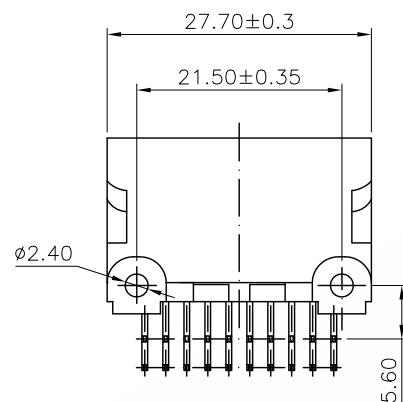

PCB LAYOUT

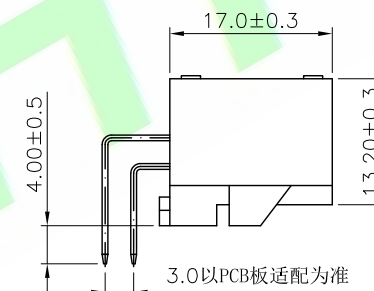

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : A22011R-20Q-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES				DWG. NO.:
3X				CHKD.: Tony	x.:	x': ±5.0°	TITLE : 2.2mm Pitch Housing Assembly R/A Type	SHEET: 1/1			A4
2X					x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 12-Oct-2021				