



Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Withstanding Voltage:1000V AC/Minute

<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>
----------	----------	----------	----------	----------

5:—— C:In Tray

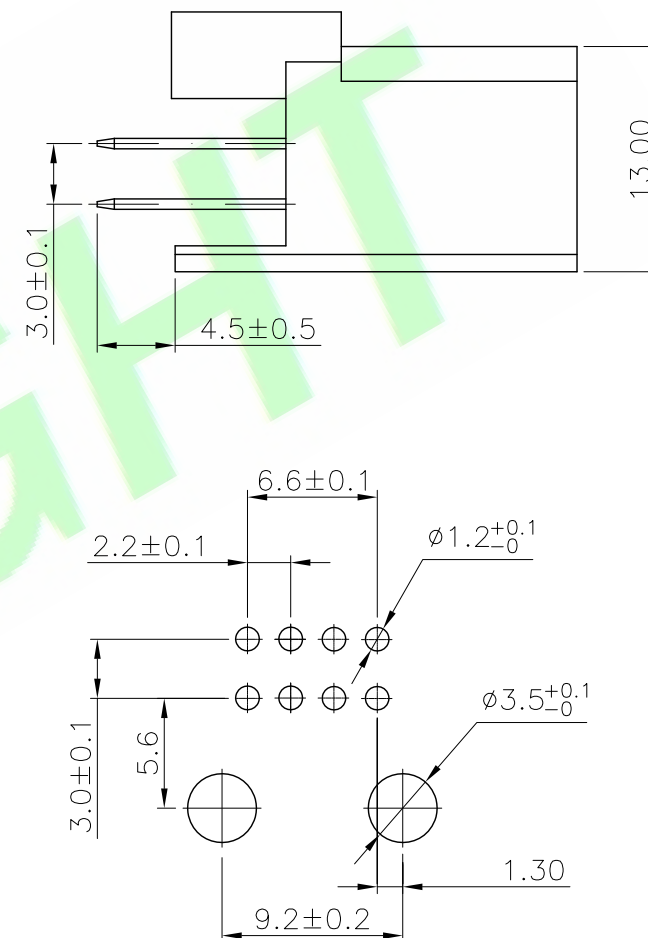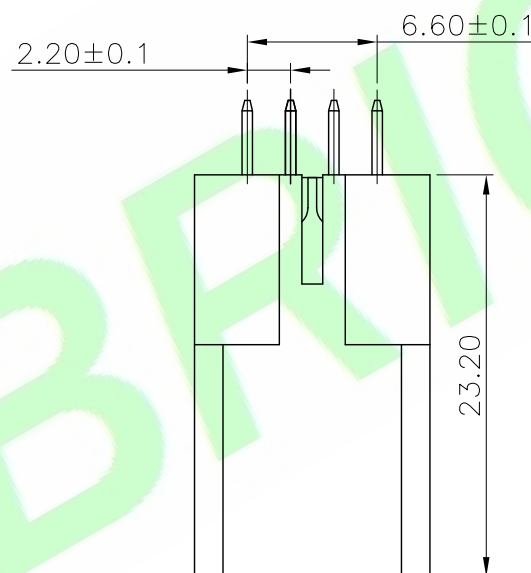

Resistance:10m Ohm Max
 R resistance:100M ohm min.
 Withstanding Voltage:1000V AC/Minute

Parting Information
 11S-08Q-01-C
 2 3 4 5

- Series No.
- R:R/A Type
- No. of Positions
- Q: Tin Plated
- C: In Tray

Technical drawing showing dimensions for a 4-position terminal block:

- Overall width: 11.1 ± 0.15
- Pitch: 2.20 ± 0.1
- Width of one position: 6.60 ± 0.1
- Height: 23.20
- Height of the top section: 3.0 ± 0.1
- Height of the bottom section: 5.6

Parting Information: 11S-08Q-01-C

Series No. 2 3 4 5

— Series No.

— R:R/A Type

— No. of Positions

— Q: Tin Plated

— C: In Tray

DR.BY.: _____

GENERAL TOLERANCE: _____

PART NO : A22011S-08Q-01-C

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A22011S-08Q-01-C		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: x.x: ±0.30	x': x.x': ±3.0°	TITLE : 2.2mm Pitch PCB Header Connectors (Vertical Mount Type)				
2X	Update code options	Judyyan	202201006	APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	DATE: 3-Dec-2016		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
1X	ORIGINAL	Samson			x.xxx: ±0.10	x.xxx': ±1.0°			SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.						UNIT: mm		