

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

A22011S-16Q-01-C

1 2 3 4 5






1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — Q: Tin Plated

5: — C: In Tray

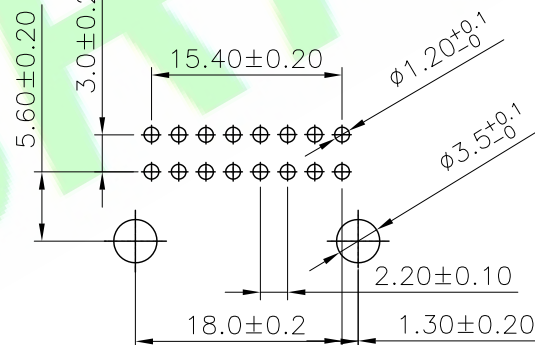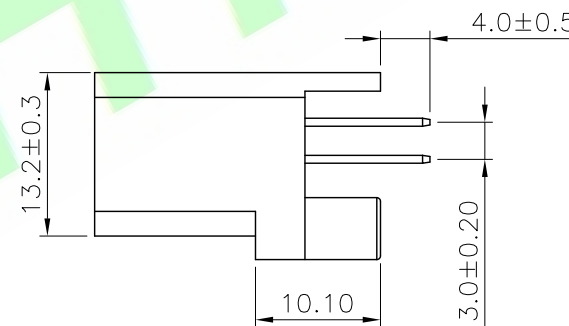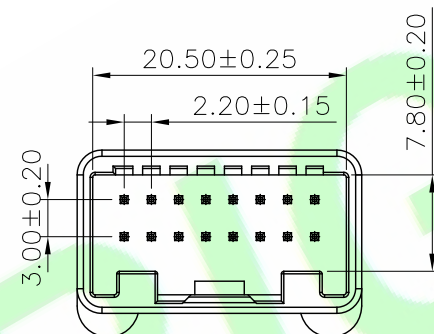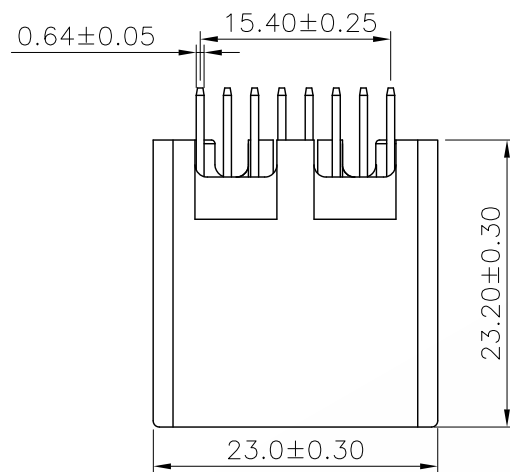

Recommended PCB Layout

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : A22011S-16Q-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: x.x: ±0.30	x': ±5.0° x.x': ±3.0°	TITLE : 2.2mm Pitch PCB Header Connectors (Vertical Mount Type)	SHEET: 1/1		A4
2X	Update code options	Judyyan	20221006		x.xx: ±0.20	x.xx': ±2.0°		SCALE: 1:1		
1X	ORIGINAL	Bruce		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 3-Dec-2016		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy						



THIRD ANGLE PROJECTION

A4