

RoHS Compliant

Specifications:

Material And Finish:
Insulator:PBT UL94V-0 Color:Natural
Contact:Brass
Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
Voltage Rating:12V AC/DC
Operating Temperature Range:-40°C~+125°C





Electrical:

Contact resistance:10m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information

A22011S-32Q-01-C
1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — Q: Tin Plated
5: — C: In Tray

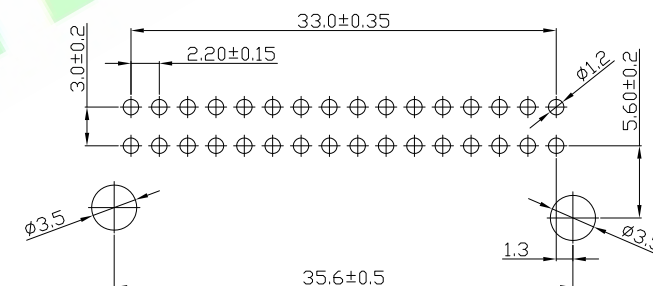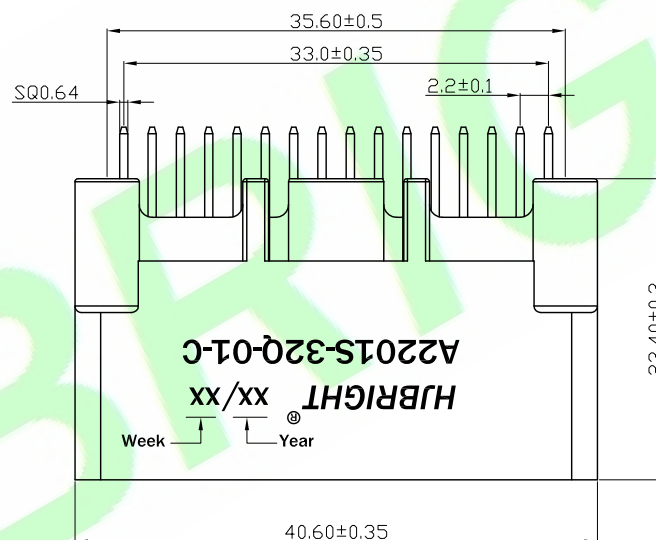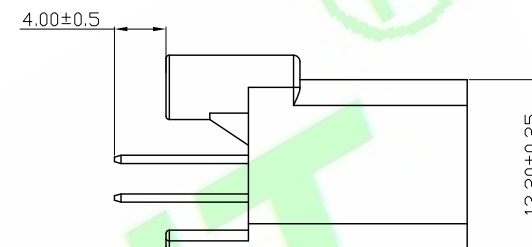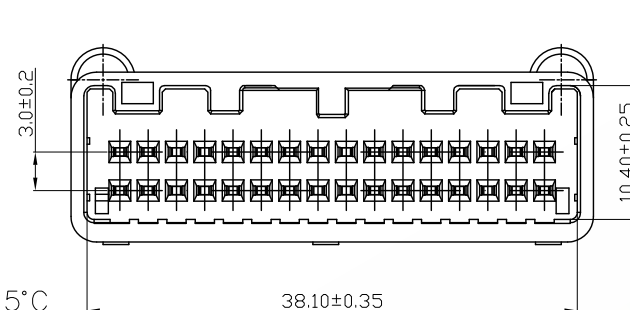

PCB LAYOUT

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A22011S-32Q-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.:	x': ±3.0°	TITLE :	A22011S Series PCB Header(V-Type)	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
2X	Update code options	Judyyan	20221007	APPD.: Billy	x.x: ±0.30	x.x': ±1.0°			SCALE: 1:1		
1X	ORIGINAL	Samson			x.xx: ±0.20	x.xx': ±0.5°			UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±	DATE: 02-Nov-2013				