

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color: Natural

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max









Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

A2202R-16Q-01-X				
1	2	3	4	5

- 1: — Series No.
 2: — R:R/A Type
 3: — No. of Positions
 4: — Q: Tin Plated
 5: — A: In bag
 B: In Tube
 C: In Tray

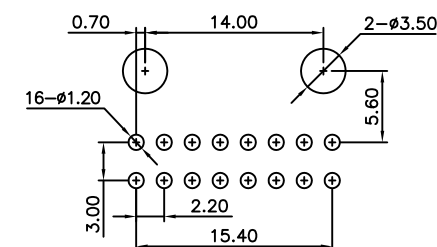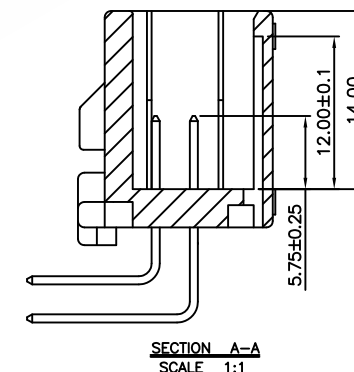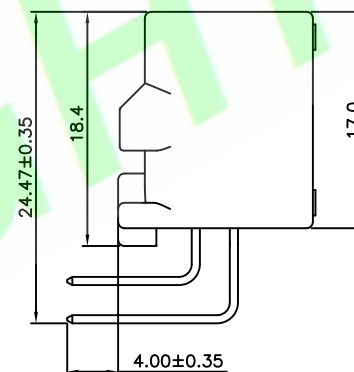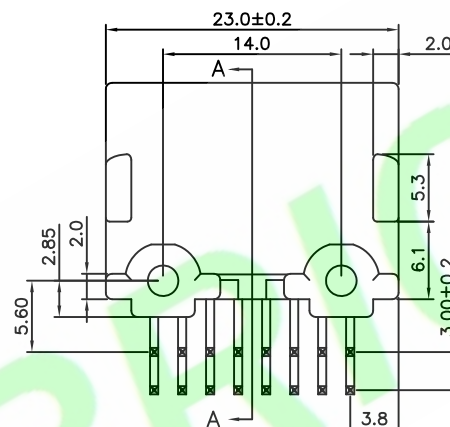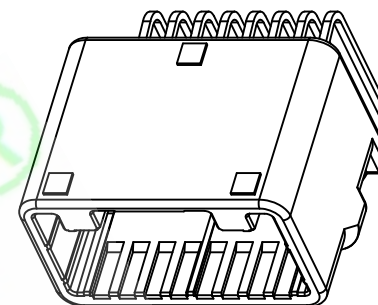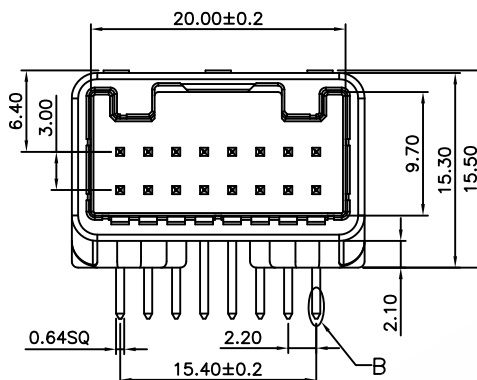

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE: LINEAR ANGLES	PART NO : A2202R-16Q-01-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	SHEET: 1/1	THIRD ANGLE PROJECTION	A4
4X				CHKD.: Tony		DWG. NO.:				
3X				APPD.: Billy	X.: ±5.0°	TITLE : 2.2mm Pitch Housing Assembly R/A Type		SCALE: 1:1		
2X	依实物修正折弯处	Samson	2017.3.30		X.X: ±0.30	DATE: 3-Dec-2015		UNIT: mm		
1X	ORIGINAL	Kenry			X.XX: ±0.20					
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10					
					X.XXX: ±1.0°					